Energy & Sustainability Report

Kilcock West SHD

Project No. D001

26th August 2022

OCSC

O'CONNOR | SUTTON | CRONIN

Multidisciplinary
Consulting Engineers

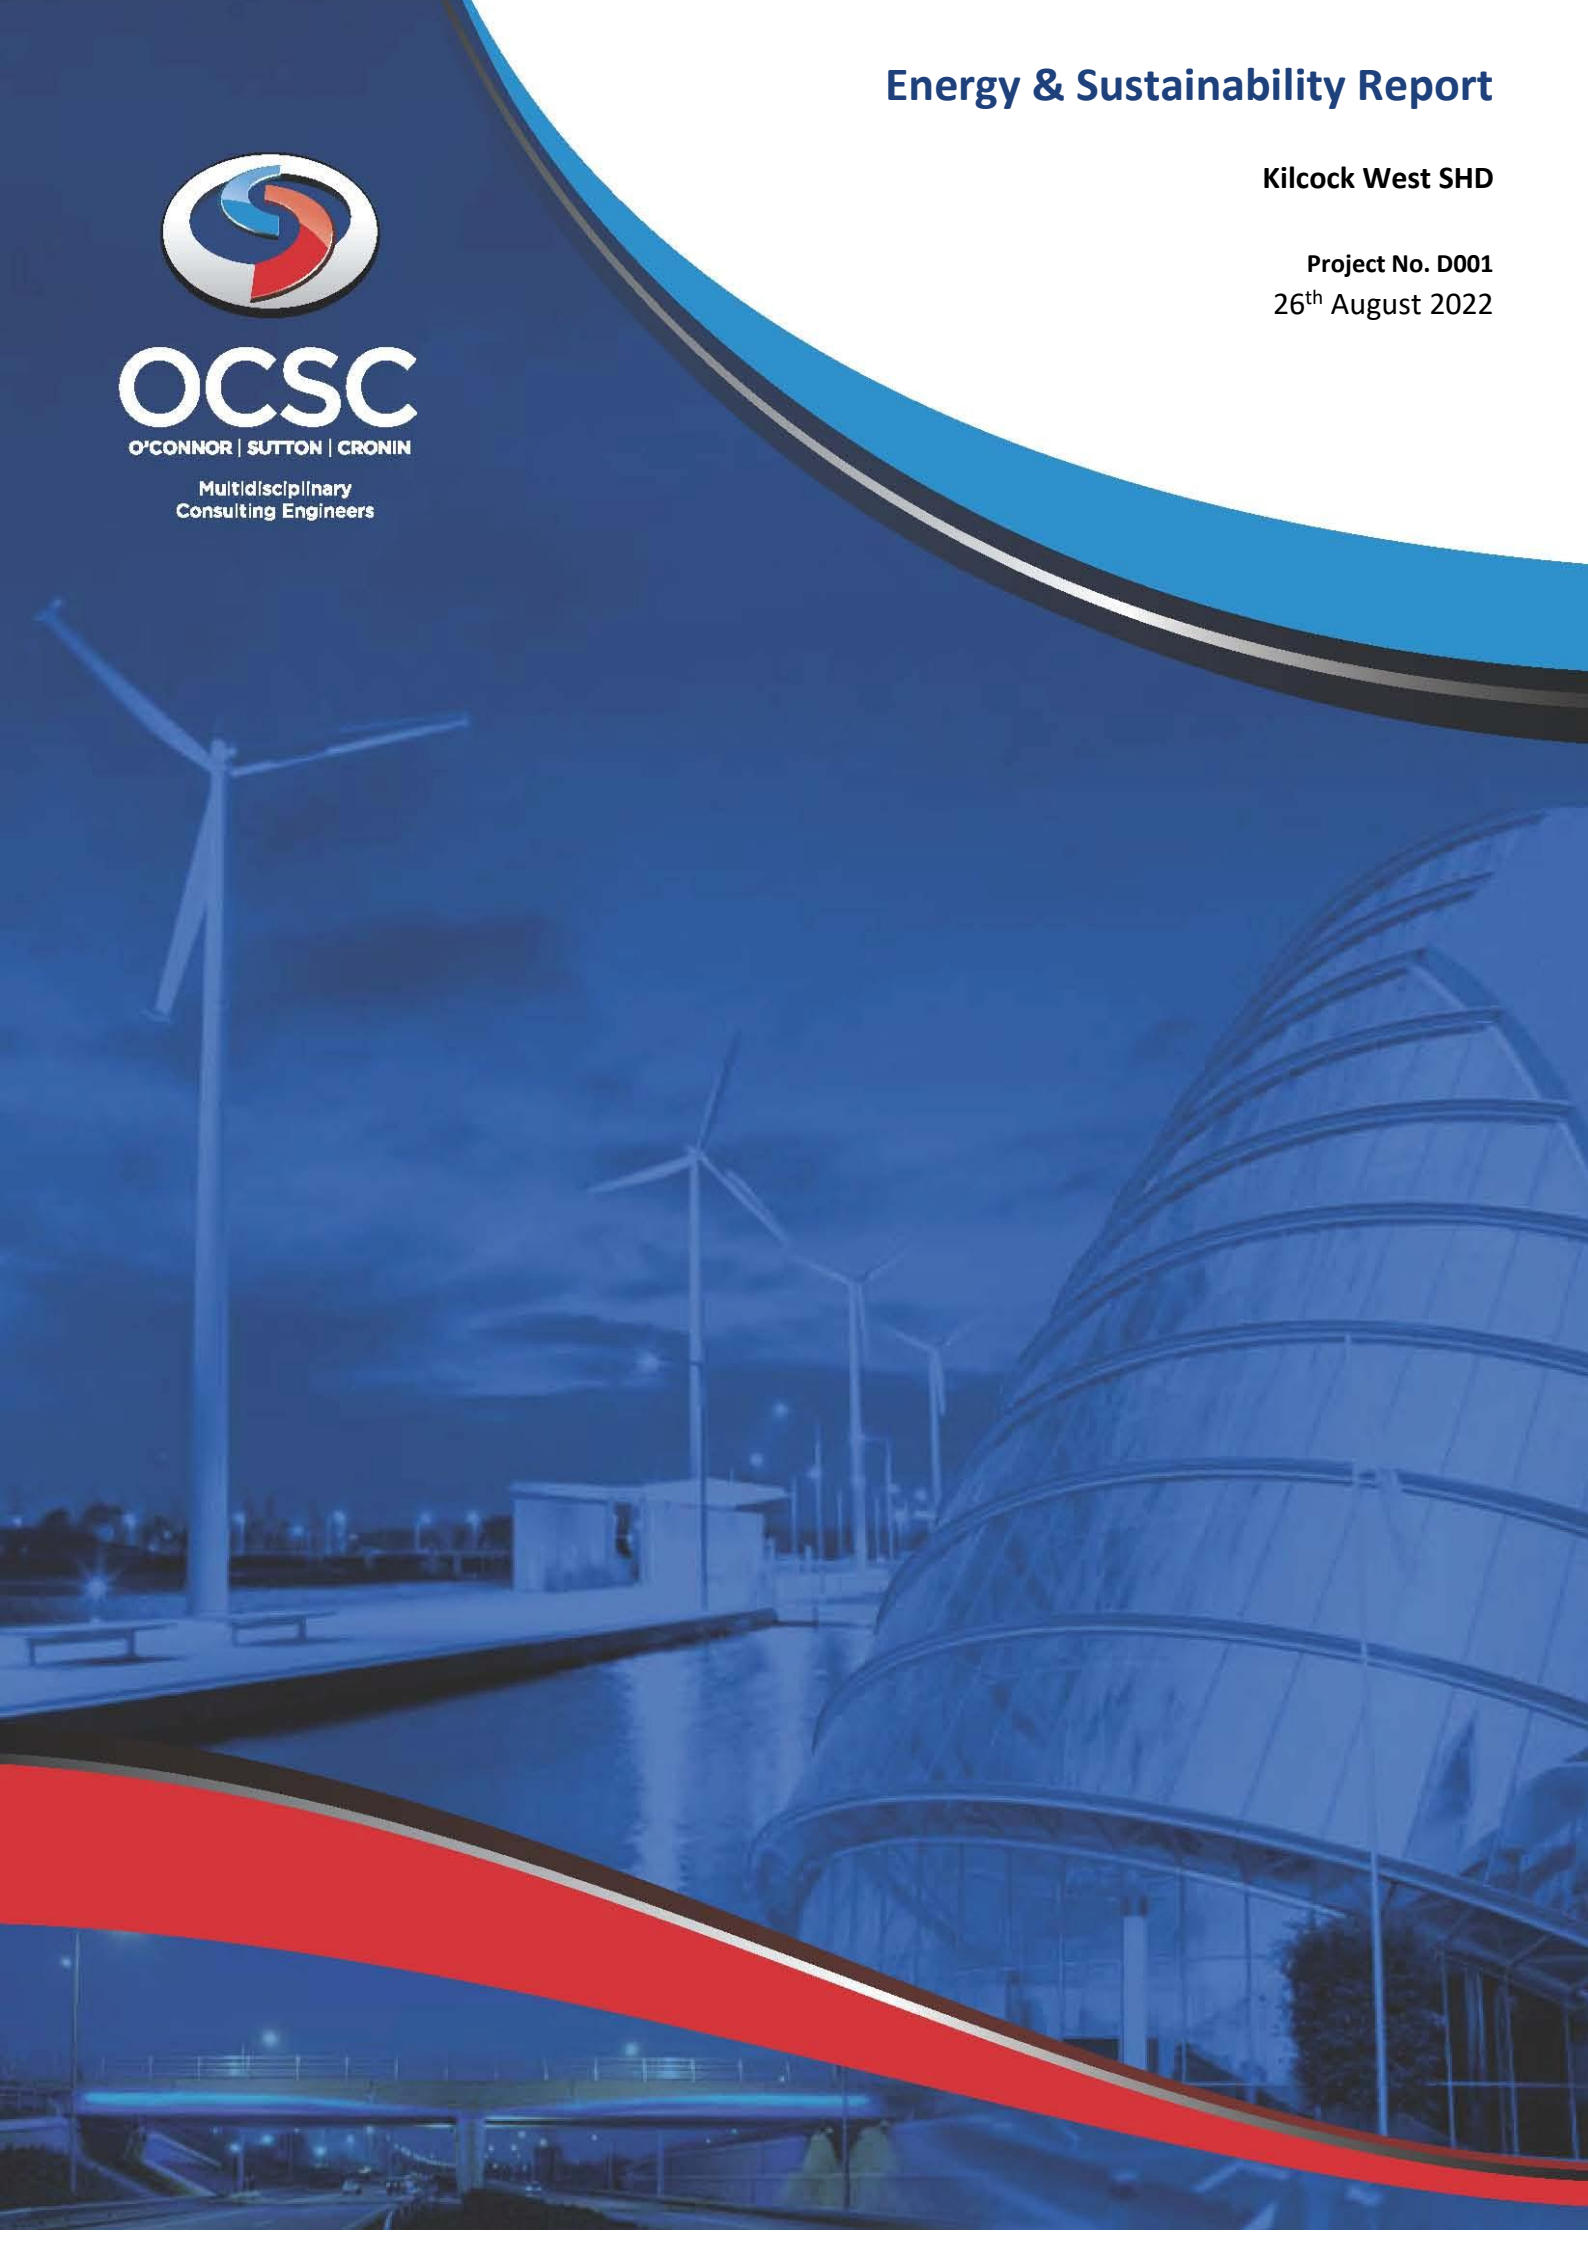

Energy & Sustainability Report



NOTICE

This document has been produced by O'Connor Sutton Cronin & Associates for its Client. It may not be used for any purpose other than that specified by any other person without the written permission of the authors.

DOCUMENT CONTROL & HISTORY

OCSC Job No.: D001	Project Code	Originator Code	Zone Code	Level Code	File Type	Role Type	Number Series	Status/ Suitability Code	Revision
	D001	OCSC	XX	XX	RP	YS	0001	S3	P01

Rev.	Status	Authors	Checked	Authorised	Issue Date
2	For Planning	PF	PF/SS	PF	26/08/2022
1	For Comment	PF	PF	PF	15/03/2021

EXECUTIVE SUMMARY

This document provides an overview of how the project intends to integrate sustainability as a key strategy into the building's design. The report focuses on the performance targets required by the Building Regulations Part L – Conservation of Fuel and Energy and what energy measures are needed to ensure compliance. Furthermore, a Building Energy Rating (BER) of A2/A3 has been targeted throughout.

The following document sets out the energy design approach that requires the design to initially focus on an energy demand reduction. This will primarily be through passive strategies such an energy efficient envelope which in turn reduces the demand relating to items such as HVAC and renewable energy systems. This initial approach in reducing the energy demand significantly aids the project in obtaining the desired energy goals while reducing running costs. Performance criteria relating to the development's building envelope are set out within the document.

The energy systems design must also focus on specifying energy efficient equipment to ensure the day to day running of the energy systems are optimised to further enhance energy savings and the related energy cost. Specifications relating to efficient heating, cooling, lighting and auxiliary equipment are also set out in this document.

This report confirms that if the energy and sustainability strategy is successfully implemented, the proposed Kilcock West development will achieve all energy and sustainability targets.

ENERGY & SUSTAINABILITY REPORT

INDEX **PAGE**

EXECUTIVE SUMMARY 4

1. INTRODUCTION 6

2. PROPOSED DEVELOPMENT 7

3. PART L CONSERVATION OF FUEL & ENERGY - DWELLINGS 10

4. PART L CONSERVATION OF FUEL & ENERGY - BUILDINGS OTHER THAN DWELLINGS 11

5. PART F VENTILATION 13

6. BUILDING ENERGY RATING (BER) 14

7. THE ENERGY HIERARCHY PLAN 15

8. CONCLUSION 26

1. INTRODUCTION

The purpose of this report is to identify the energy efficiency measures associated with the design, construction, ongoing management and maintenance of the proposed Kilcock West.

The proposed development will comply with Part L 2019 (NZEB) for residential and Part L 2017 (NZEB) for non-residential. As part of the development's efforts to further reduce energy consumption, the project is targeting an A2/A3 BER (Building Energy Rating).

Extensive work has been carried out to develop a balanced design approach to achieve these onerous targets with a number of sustainable features being incorporated into the design from the early stages.

Energy Performance Targets		
Standard / Rating	**Mandatory**	**Target**
Part L Residential	Yes	2019 (NZEB)
Part L Non-residential	Yes	2017 (NZEB)
BER Residential	Yes	A2/A3
BER Non-residential	Yes	A3

Table 1: Energy Performance Targets

The following sections identify a range of energy efficient measures that have been considered for the proposed development.

2. PROPOSED DEVELOPMENT

The proposed development (30,839 sq.m GFA) will consist of the demolition of a detached, vacant cottage (gfa 69sq.m) and the construction of 272 residential units (149 no. houses, 65 apartments and 58 duplexes), childcare facility and foul pumping station along with associated ancillary works and site works.

The 149 no. dwellings consist of:

- 40 no. 4 bed 2 storey houses (House Type A1, A2, A3, A4, A5)
- 8 no. 4 bed 3 storey houses (House Type E1, E2)
- 90 no. 3 bed 2 storey houses (House Type B1, B2, B3, C1, C2)
- 11 no. 2 bed 2 storey houses (House Type D)

The proposed apartments and duplexes are provided in 7 no. blocks (Blocks A, B, C, D, E, F, G) ranging in height from 3 to 4 storeys, with the exception of 1no. Duplex Block (Type N1), which is a 3 storey, end of terrace unit. Block A and Block B containing Rooftop terraces at 3rd floor level.

The Duplex Blocks (Type J1, Type, J2, Type J3, Type J4, Type K1, Type L1, Type M1, Type N1) are all 3-storey and contain 58 units divided as follows:

1. 6no. 1 bed ground floor apartment units
2. 23no. 2 bed ground floor apartment units
3. 1no. 2 bed duplex unit (two-storey unit)
4. 25no. 3 bed duplex units (two-storey units)
5. 3no. 4 bed duplex units (two-storey units)

The 65 apartments are located within Blocks A, B, C and D divided as follows:

6. 17no. 1 bed units (Type F1, Type F2, Type F3, Type F5, Type F5, Type F6)
7. 37no. 2 bed units (Type G1, Type G2, Type G3, Type G4, Type G5-A, Type G5-B, Type G6, Type G7, Type G8)
8. 11no. 3 bed units (Type H1, Type H2)

Block D also contains a childcare facility (gfa.526.2 sqm) and includes a dedicated outdoor play area (about 210 sq.m).

Ancillary works including 2 no. vehicular entrances off the R148 to the north and west, a spine road which will link with the permitted spine road on the adjoining lands to the south-east under PL09.306826, internal roads, footpaths, cycle lanes, car parking (465 no. spaces), cycle storage/parking (426 no. spaces), 2 no. bus stops, bin storage, public open space, hard and soft landscaping, natural play area, play equipment, boundary treatments, public lighting, 3 no. substations (14sq.m each) and controlled pedestrian crossing on the R148.

All associated site and infrastructural works including underground wastewater pump station (a wetwell); welfare building 6.25sqm and 3m in height; 472m of 125mm OD rising main and 250m of gravity sewer along the R148; an underground emergency storage tank, capacity 230 m3 approx.; above ground lifting gantry; valve and flowmeter chambers; a chemical dosing facility for odour control; Passive Carbon Unit; Kiosks; above ground surge vessel (<13 m3); Landscaping, fencing and access off the R148. The proposed development includes all necessary ancillary pipework and manholes, diversion of existing utilities; new power supply and water connection for the pump station, ducting, mechanical and electrical services, plant, instrumentation, automation, controls and equipment. It also includes all associated site development works, hardstanding areas and access and site drainage. The proposed development includes works on lands owned by Kildare County Council to facilitate access and drainage infrastructure.



Figure 1: Proposed Site Plan above- Architects drawing P101B

3. PART L CONSERVATION OF FUEL & ENERGY - DWELLINGS

3.1. PART L 2019 (NZEB)

Part L 2019 (NZEB) of the Technical Guidance Document has been issued by the Minister for Housing, Planning, Community and Local Government. This document is the new standard for dwellings constructed from November 2019.

The Part L 2019 (NZEB) regulations set energy performance requirements to achieve Nearly Zero Energy Buildings performance as required by Article 4 (1) of the Directive for new buildings.

The definition of Nearly Zero Energy Buildings is defined as:
"'Nearly zero-energy building' means a building that has a very high energy performance, as defined in Annex 1. The nearly zero or very low amount of energy required should be covered to a very significant extent by energy from renewable sources, including energy from renewable sources produced on-site or nearby".

For the Part L 2019 (NZEB) requirements, a Renewable Energy Ratio (RER) is to replace the Part L 2011 renewable requirements. A RER of 20% (ratio of total primary energy generated from renewable energy resources to total primary energy consumption) is required to achieve compliance.

In line with the requirements detailed within the Technical Guidance Document, renewable energy technologies are defined as technologies that derive their energy directly from a renewable energy source, such as:

- Solar Photo-Voltaic Systems;
- Solar Thermal System;
- CHP Units (Combined Heat & Power);
- Heat Pumps (Minimum COP of 2.5).

4. PART L CONSERVATION OF FUEL & ENERGY - BUILDINGS OTHER THAN DWELLINGS

4.1. LOCATION OF NON-RESIDENTIAL DEVELOPMENT

The non-residential aspects of the development will consist of the Childcare facility, within Ground floor of Block D and includes a dedicated outdoor play area of 210 sqm..

4.2. PART L 2017 (NZEB)

The Part L 2017 (NZEB) building regulations is the new standard for all buildings other than dwellings constructed after 1st January 2019. The Part L 2017 (NZEB) regulations set energy performance requirements to achieve Nearly Zero Energy Buildings performance as required by Article 4 (1) of the Directive for new buildings. The definition of Nearly Zero Energy Buildings is defined as:

"Nearly zero-energy building' means a building that has a very high energy performance, as defined in Annex 1. The nearly zero or very low amount of energy required should be covered to a significant extent by energy from renewable sources, including energy from renewable sources produced on-site or nearby".

For new buildings other than dwellings, the Part L 2017 (NZEB) requirements shall be met by:

a) providing that the energy performance of the building is such as to limit the calculated primary energy consumption and related Carbon Dioxide (CO2) emissions to a Nearly Zero Energy Building level insofar as is reasonably practicable, when both energy consumption and Carbon Dioxide emissions are calculated using the Non-domestic Energy Assessment Procedure (NEAP) published by Sustainable Energy Authority of Ireland (1.0 for EPC and 1.15 for CPC);
b) providing that, the nearly zero or very low amount of energy required is covered to a very significant extent by energy from renewable sources produced on-site or nearby;
c) limiting the heat loss and, where appropriate, availing of the heat gains through the fabric of the building;
d) providing and commissioning energy efficient space heating and cooling systems, heating and cooling equipment, water heating systems, and ventilation systems, with effective controls;

e) ensuring that the building is appropriately designed to limit need for cooling and, where air-conditioning or mechanical ventilation is installed, that installed systems are energy efficient, appropriately sized and adequately controlled;
f) limiting the heat loss from pipes, ducts and vessels used for the transport or storage of heated water or air;
g) limiting the heat gains by chilled water and refrigerant vessels, and by pipes and ducts that serve air conditioning systems;
h) providing energy efficient artificial lighting systems and adequate control of these systems;
i) providing to the building owner or occupants sufficient information about the building, the fixed building services, controls and their maintenance requirements so that the building can be operated in such a manner as to use no more fuel and energy than is reasonable.

Renewable Energy Ratio (RER):

This is the most significant change introduced as part of the Part L 2017 (NZEB) regulations for non-residential buildings. Some of the main performance requirements are as follows:

- The new regulations will require a significant level of energy provision be provided onsite or nearby by renewable energy technologies, e.g. solar energy (thermal and photovoltaic), air and exhaust air source heat pumps, combined heat and power, biomass boiler, etc.
- The current NZEB definition does not allow the renewable requirement to be met though the purchase of off-site green electricity.
- There are two routes in achieving compliance with the renewable target:
  - Route 1 = If the Part L compliance is achieved with no tolerance (0% margin), 20% of the building's energy use must be provided by onsite / near site renewable technologies.
  - Route 2 = If the Part L compliance is achieved with a minimum of 10% margin, then 10% of the building's energy use must be provided by onsite / near site renewable technologies. To achieve the 10% margin, the building envelope, lighting and M&E specification will likely have to be improved above minimum requirements.

5. PART F VENTILATION

This report is primarily focused around achieving compliance with Part L of the building regulations, but in doing so, the ventilation systems proposed must also comply with Part F (Ventilation) of the Technical Guidance Documents (TGD).

The TGD Part F 2019 document revolves around two requirements as outlined below:

Means of ventilation.

- *F1 – Adequate and effective means of ventilation shall be provided for people in buildings. This shall be achieved by:*

a) Limiting the moisture content of the air within the building so that it does not contribute to condensation and mould growth, and

b) Limiting the concentration of harmful pollutants in the air within the building.

Condensation in roofs.

- *F2 - Adequate provision shall be made to prevent excessive condensation in the floor or in a roof void above an insulated ceiling.*

The proposed development will be designed to achieve compliance with Part F of the building regulations.

6. BUILDING ENERGY RATING (BER)

As of 1st July 2009, all newly built domestic and non-domestic buildings and existing buildings that are for sale or rent require a BER (Building Energy Rating) certificate.

The actual building energy rating is based on the primary energy used for one year and is classified on a scale of A1 to G with A1 being the most energy efficient. It also provides the anticipated carbon emissions for a year of occupation based on the type of fuel that the building systems use. The following determines the extent of primary energy consumption within the building:

- Building type (office, retail, etc.);
- Building orientation;
- Thermal envelope (insulation levels of the façade, roofs, ground floor etc);
- Air permeability (how much air infiltrates into the building through the façade);
- Heating systems (what type of plant is used and how efficient it is);
- Cooling systems (what type of plant is used and how efficient it is);
- Ventilation (what form of ventilation is used - natural ventilation, mixed mode mechanical ventilation);
- Fan and pump efficiency (how efficient are the pumps and fans);
- Domestic hot water generation (what type of plant is used and how efficient it is); and
- Lighting systems (how efficient is the lighting).

The areas identified above will be described within this report and categorised under three main headings through "The Energy Hierarchy Plan". i.e. Be Mean, Be Lean, Be Green.

7. THE ENERGY HIERARCHY PLAN

Through the specification of an energy efficient façade and HVAC systems, the energy consumption of a building will be reduced compared to a set baseline. This ensures the environmental and economic impact of the operation of the building is reduced.

The key steps in the Energy Hierarchy Plan are outlined as follows:

1. The key philosophy of this plan is to first reduce energy demand by improving the building's thermal envelope, increasing air tightness, improving thermal transmittance and applying passive design techniques.

2. The second step is to utilise energy in the most efficient way through the selection and installation of energy efficient plant and equipment.

3. The final step is to introduce energy from renewable sources to reduce the burden on fossil fuels.

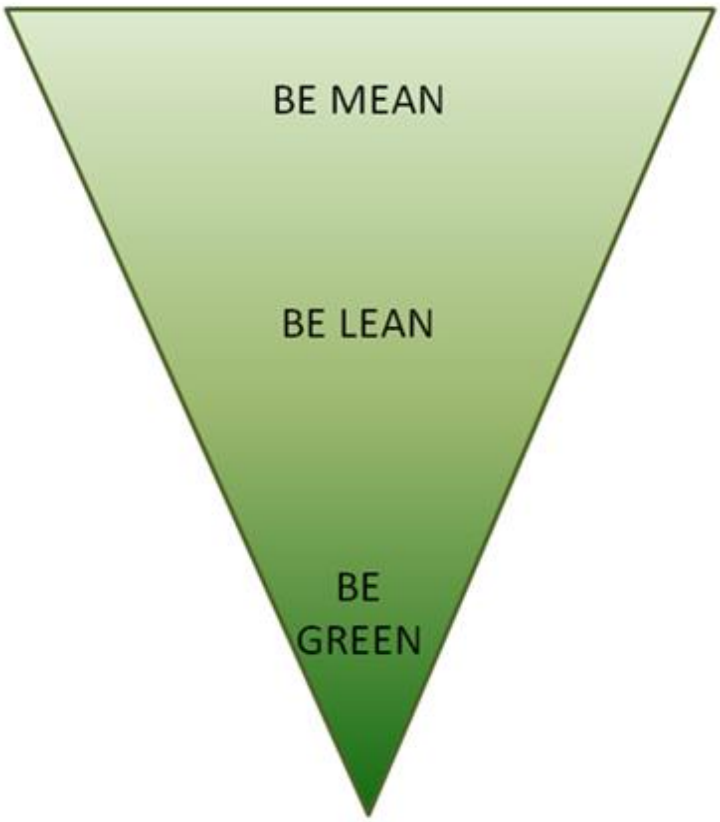

Figure 2: Energy Hierarchy Plan

7.1. STEP 1 (BE MEAN) – USE LESS RESOURCES

The following measures will be implemented to reduce the energy consumption of the proposed development:

- High performance U-values;
- Improved air tightness; and
- Improved thermal transmittance and thermal bridging design.

7.1.1. HIGH PERFORMANCE U-VALUES

To limit the heat loss through the façade, careful consideration must be shown when designing the external façade. The specification of the insulation utilised, and the continuity of insulation are crucial. Insulation slows the rate at which heat is lost to the outdoors. Heat flows in three ways: by conduction, convection and radiation.

The targeted maximum average elemental U-Values for both the residential and non-residential aspects of the proposed development are outlined in Table 2 and Table 3 below.

Fabric Element	Kilcock West Maximum Average Elemental U-value ($W/m^2.K$)
External Walls	0.18
Flat Roof	0.18
Pitched Roof	0.16
Ground Contact & Exposed Floor	0.18 (0.15 if underfloor heating installed)
External Windows & Doors	1.40

Table 2: Residential Building Envelope Thermal Performance Targets

Fabric Element	Kilcock West Maximum Average Elemental U-value ($W/m^2.K$)
External Walls	0.20
Flat Roof	0.18
Pitched Roof	0.16
Ground Contact & Exposed Floor	0.20 (0.15 if underfloor heating installed)
External Windows & Doors	1.40

Table 3: Non-residential Building Envelope Thermal Performance Targets

7.1.2. AIR TIGHTNESS

One major contributing factor to unnecessary heat loss is infiltration. Infiltration is the air leakage of external air into a building due to the pressure difference associated with internal and external temperatures.

It is intended that the residential and non-residential development will both target an air permeability rate of 3 $m^3/hr/m^2$ @ 50 Pa.



Figure 3: Air Tightness Testing

7.1.3. THERMAL TRANSMITTANCE

Thermal bridges occur where the insulation layer is penetrated by a material with a relatively high thermal conductivity and at interfaces between building elements where there is a discontinuity in the insulation. The residential and non-residential development will be designed to achieve low thermal bridging values throughout. A Y value of ≤ 0.08 W/m^2K is being targeted for the residential development in accordance with Part L 2019 (NZEB) requirements.

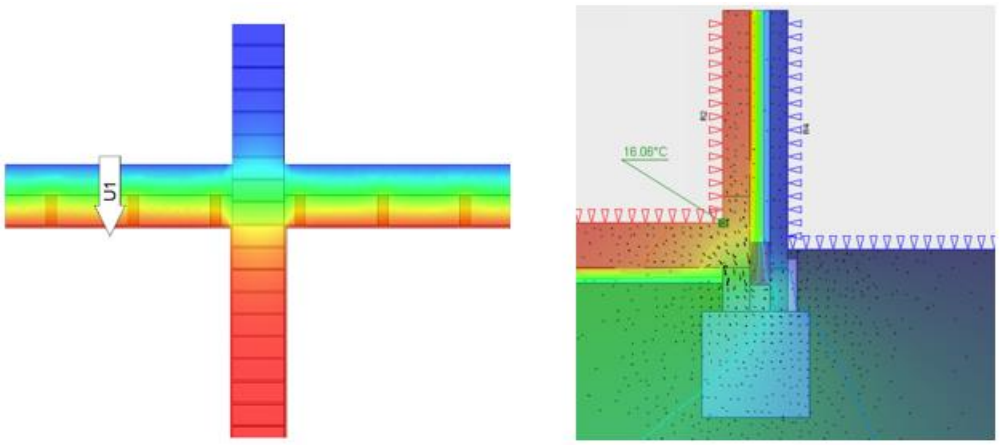

Figure 4: Thermal Bridge Assessment

7.1.4. OVERHEATING ANALYSIS

Due to factors such as climate change, population increase and construction of high-rise buildings there has been an increase in high internal temperatures. Overheating of buildings can be extremely uncomfortable for the occupant and can ultimately lead to costly mitigation measures.

Residential:

The proposed residential elements will be evaluated and analysed with respect to overheating as outlined in Part L 2019 (NZEB) and CIBSE TM59 (Design Methodology for the Assessment of Overheating Risk in Homes).

Non-residential:

The proposed non-residential elements will be evaluated and analysed with respect to overheating as outlined in Part L 2017 (NZEB) and CIBSE TM52 (Limits of Thermal Comfort: Avoiding Overheating in European Buildings).

7.1.5. PASSIVE DESIGN

The proposed development will be evaluated and analysed with respect to daylight/ sunlight/ overshadowing, in order to determine the following:

- The expected daylight levels within the living and bedroom areas of selected apartments, to give an indication of the expected daylight levels throughout the proposed development.
- The quality of amenity space being provided as part of the development, in relation to sunlight.
- Any potential overshadowing impact the proposed development may have on properties adjacent to the site.

7.1.6. PASSIVE DESIGN

An extensive analysis was carried out on the proposed façade to limit the effects of unnecessary solar gains during the summer time period. The image below illustrates the design intent to provide local shading utilising the building structure which allows glazing areas to be maximised, where required.
This balance of shading and maximised glazing areas provides both enjoyable and interesting workspaces, full of natural light and without undue solar gains in summertime. The shading coefficient of the glazing units has also been optimised to limit unnecessary solar gains, while allowing as much natural daylight to enter the workspace as possible.



Figure 5.1: Architects Elevation P209A of Block D of Proposed Façade Design (as example)

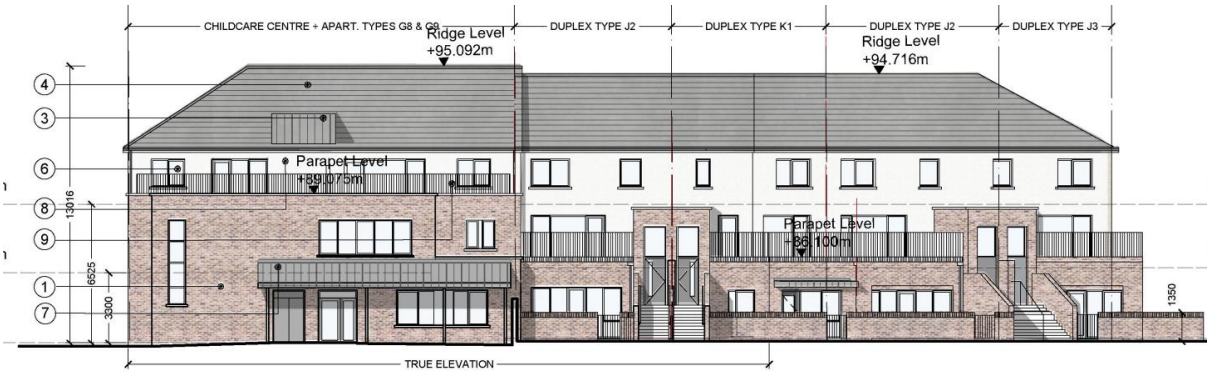

Figure 5.2 Architects Elevation P209A of Block D of Proposed Façade Design

MATERIAL LEGEND

1. Selected Brickwork 1
2. Selected Brickwork 2
3. Selected Metal
4. Selected tiled roof
5. Selected Spandrel Panel System
6. Windows to be selected subject to DEAP analysis
7. Selected standing seam system to canopy roof.
8. Selected render
9. Metal balustrade or similar approved

Lighting accounts for typically 12% of the overall primary energy. Typically, this is even higher for non-residential spaces. Maximising natural daylighting in the main non-residential areas reduces this demand during daylight hours.

7.2. STEP 2 (BE LEAN) – USE RESOURCES EFFICIENTLY

To maximise the effectiveness of changes to the construction, it is important to use the energy sources within the building as efficiently as possible.

7.2.1. LOW ENERGY PLANT - RESIDENTIAL

To improve the overall energy efficiency of the residential aspect of the development, plant is to be selected based on performance and energy efficiency.

Space Heating: The plant options for space heating are:

- Electric Panel Heaters, or
- Air Source Heat Pumps (ASHP), or
- Exhaust Air Heat Pumps (EAHP)

Domestic Hot Water: The plant options for domestic hot water are:

- Air Source Heat Pumps (ASHP), or
- Exhaust Air Heat Pumps (EAHP)

Ventilation: The plant options for ventilation are:

- Mechanical Ventilation and Heat Recovery, or
- Mechanical Extract Ventilation via the EAHP

Variable Speed Drives (VSDs): Variable speed drive motors are to be fitted to all fans and pumps servicing all HVAC systems. Standard fans and pumps operate at a constant speed to meet maximum demand even though only half the building may be occupied. VSDs have the ability to ramp up or down depending on the load requirements, making this the most efficient auxiliary system to install.

7.2.2. LOW ENERGY PLANT - NON-RESIDENTIAL

To improve the overall energy efficiency of the non-residential aspect of the development, plant is to be selected based on performance and energy efficiency.

Space Heating: The plant options for space heating are:

- High Efficiency Condensing Gas Boilers, or
- Air Source Heat Pumps (ASHP), or
- Variable Refrigerant Flow (VRF) Heat Pumps.

Domestic Hot Water: The plant options for domestic hot water are:

- High Efficiency Condensing Gas Boilers, or
- Air Source Heat Pumps (ASHP).

Space Cooling: The plant options for space cooling are:

- Natural ventilation where possible, and/or
- Variable Refrigerant Flow (VRF) Heat Pumps, or
- Air Source Heat Pumps (ASHP), or
- Air-cooled Chillers

Ventilation: The proposed ventilation strategy for the building will be natural ventilation where possible and/or mechanical ventilation. The mechanical ventilation system will be a high efficiency, variable speed drive system that also incorporates heat recovery and CO_2 control.

Variable Speed Drives (VSDs): Variable speed drive motors are to be fitted to all fans and pumps servicing all HVAC systems. Standard fans and pumps operate at a constant speed to meet maximum demand even though only half the building may be occupied. VSDs have the ability to ramp up or down depending on the load requirements, making this the most efficient auxiliary system to install.

7.2.3. LIGHTING

The design intent for internal lighting design is to introduce artificial lighting in all applicable areas. Energy efficient light fittings will be installed throughout. The design of the building façade also allows high levels of natural daylight to enter into occupied zones.

7.2.4. ONGOING MONITORING

A BEMS (Building Energy Management System) system is to be installed to monitor the use of all major systems in the building. The BEMS system is a graphical interface that allows the facilities/building manager to monitor and control all systems throughout the building.

7.3. STEP 3 (BE GREEN) – USE OF RENEWABLE TECHNOLOGIES

The following renewable technologies are being considered for implementation in the development.

7.3.1. AIR SOURCE HEAT PUMP

Air source heat pumps convert energy from the air to provide heat and hot water for buildings. They are powered by electricity and are highly efficient. The air source heat pump is located outside in the open air and it uses a fan to draw air across it. This air then flows over a heat exchanger, which contains a refrigerant liquid. An evaporator uses the latent heat from the air to heat the refrigerant sufficiently until it boils and turns to a gas. This gas is then compressed which causes a significant rise in temperature. An additional heat exchanger removes the heat from the refrigerant which can then be used as useful heat within the dwelling.

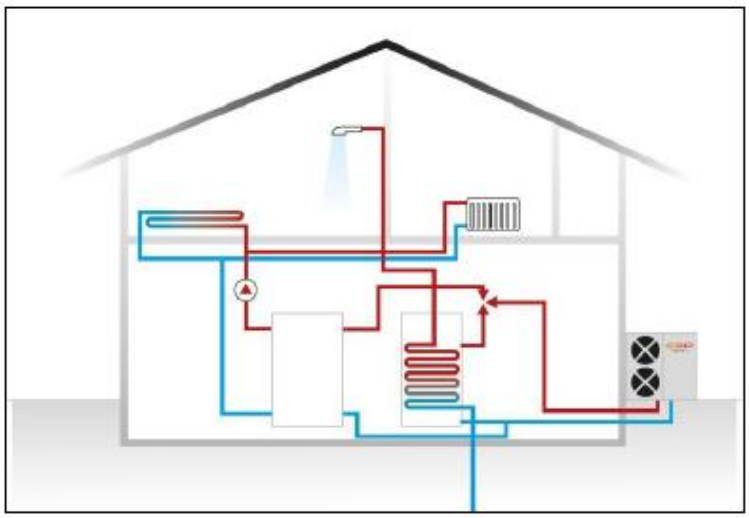

Figure 7: Air-Source Heat Pump Diagram

7.3.2. AIR SOURCE HEAT PUMP

Air-Source Heat Pumps (ASHP) are deemed a renewable energy technology under Part L 2017 (NZEB). In heating mode, ASHPs are designed to extract heat from the ambient outside air and release it inside the building via heat emitters. In cooling mode, the cycle is reversed with heat being extracted from inside the building to the outside.



Figure 8: Air-Source Heat Pump

7.3.3. SOLAR PHOTOVOLTAICS

Photovoltaic (PV) Panels convert the solar radiation into electricity, which can be connected to the mains supply of a dwelling. The panels are placed on the roof and are most efficient with an incline angle of 30°. Panels are typically arranged in arrays on building roofs, with the produced electricity fed either directly into the apartment or into the landlord's supply.

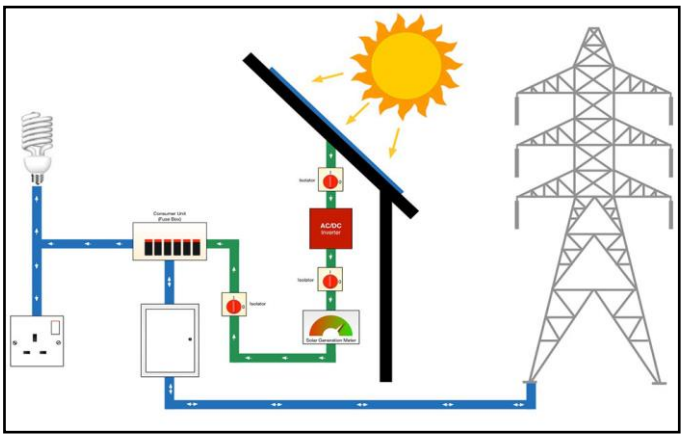

Figure 9: Solar PV Diagram

7.3.4. VRF HEAT PUMPS

Variable Refrigerant Flow systems utilise heat pumps in order to provide space heating as well as space cooling. These systems are capable of serving multiple zones with different heating and cooling requirements and they can modulate their output according to zone requirements, increasing system efficiencies and reducing the energy demand of these systems.

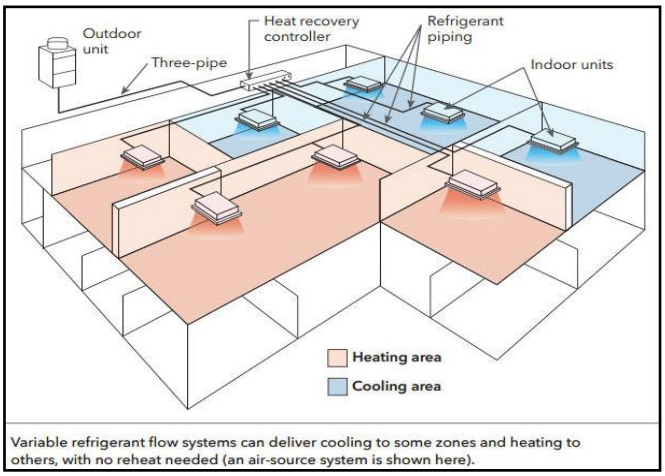

Figure 10: Typical VRF Schematic Diagram

7.3.5. EXHAUST AIR HEAT PUMP

Exhaust air heat pumps collect warm air as it leaves a building via the ventilation system and then reuse the heat that would otherwise be lost to the outside to heat fresh air coming into the building or to heat water. Exhaust air heat pumps operate on a similar basis to other heat pumps such as air source heat pumps and ground source heat pumps and are suitable for providing hot water and heating for buildings such as houses, apartments or flats.

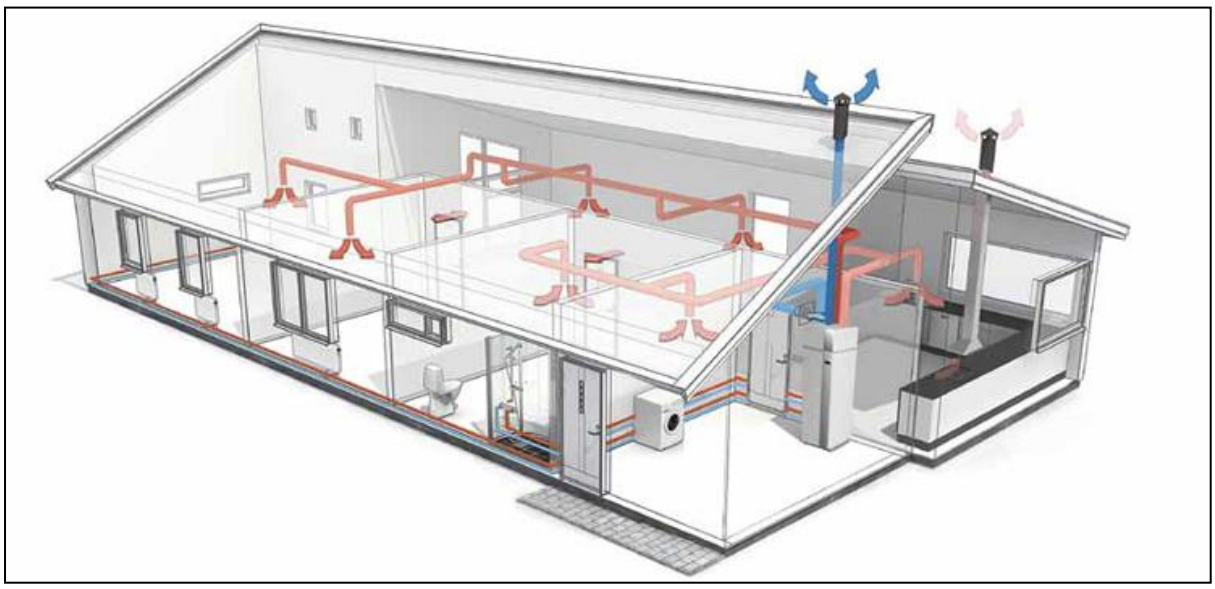

Figure 11: Example Diagram of Typical Exhaust Air Heat Pump Layout

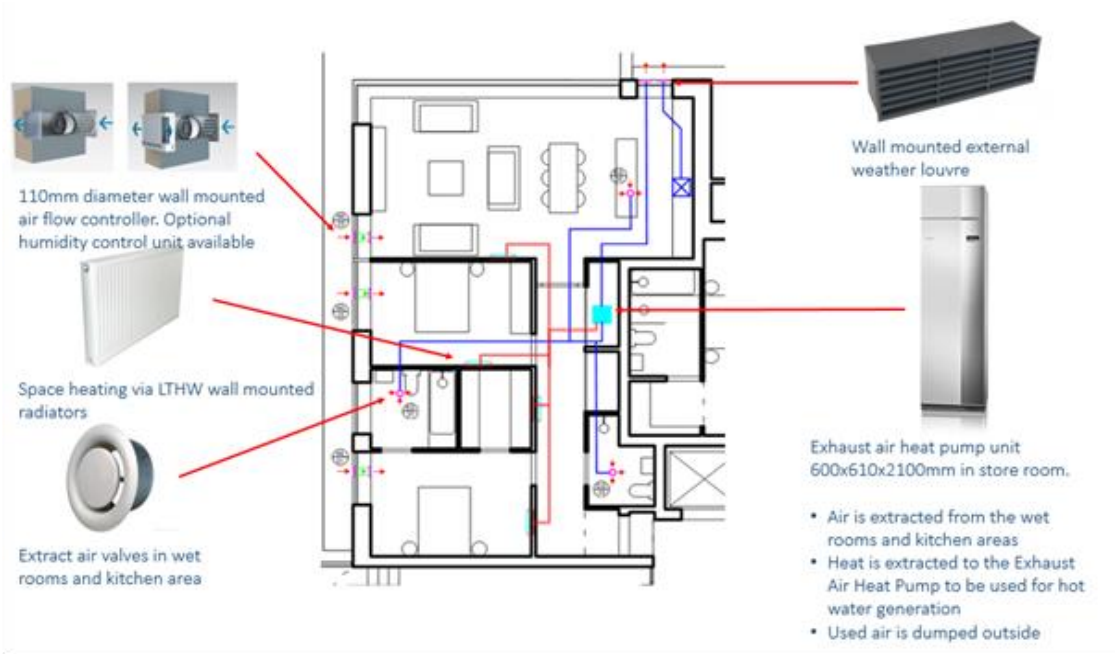

Figure 12:Example Diagram of Typical Exhaust Air Heat Pump Layout

8. CONCLUSION

A holistic sustainable approach been adopted by the design team for the proposed Kilcock West development. Through detailed design, a number of sustainability and efficiency features have been considered throughout.

The proposed residential development will comply with Part L 2019 (NZEB), as well as targeting an A2/A3 BER, while the proposed non-residential development will comply with Part L 2017 (NZEB), as well as targeting an A3 BER.

The optimised approach is based on the Energy Hierarchy Plan - Be Mean, Be Lean, Be Green.

Be Mean

- The façade performance specification has been optimised to limit heat loss, improve air tightness and thermal transmittance and to maximise natural daylight.

Be Lean

- High efficiency central plant will be specified where applicable to take advantage of the optimised façade design measures that have been introduced.
- A low energy lighting design will be utilised to further reduce energy consumption and increase occupant thermal comfort.

Be Green

- Renewable energy technologies such as Air Source Heat Pumps, Solar PV and VRF Heat Pumps will be considered for implementation.

This report confirms that if the energy and sustainability strategy is successfully implemented, the proposed development will satisfy all Part L and BER requirements.



OCSC

O'CONNOR | SUTTON | CRONIN

Multidisciplinary
Consulting Engineers

9 Prussia Street
Dublin 7
Ireland

T | +353 (0)1 8682000
F | +353 (0)1 8682100
W | www.ocsc.ie