Landscape Plan

Sheet 13 of 13


Residential Development
(LRD Application)
Southgreen Road, Kildare, Co. Kildare
Client : Pousterle Ltd.



Proposed Boundary Treatments :


Boundary Treatment 1 :

Back garden divisions
Concrete post and timber panel fencing (or Hit and miss timber panel fencing) (1.8m 1800mm) high or similar approved with proprietary concrete gravel board and concrete posts

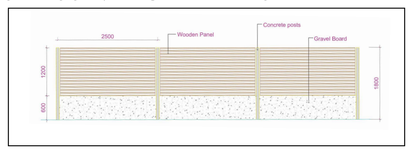

Boundary Treatment 2:

Concrete block wall. Fairfaced finish.2 metres in height piers at intervals as specified by engineers, and capped with precast concrete capping.

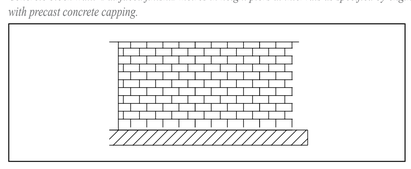

Boundary Treatment 3:

Existing boundaries retained. Primarily existing hedgerows (to be protected as per arborists recommendations)




Boundary Treatment 4:

Soft planting along unit interfaces. Consists of a combination of hedging, small trees, focal point tree and pollinator friendly infill planting. Please refer to landscape plan areas for further detail.




Boundary Treatment 5:

Concrete finish part retaining walls where required. To consist of wither A or B below:
A. Concrete block wall to rear garden end boundaries. Fairfaced finish. 1.8m metres in height piers at intervals as specified by engineers, and capped with precast concrete capping.
B. Alternatively concrete post and concrete panel fence for partial retaining at lower levels and secure boundary. To consist of concrete 300mm high x 1800mm long fence panels x min 6 no high (ie 1.8m height min following site topography. To be used be where a retaining function is required between rear garden levels.

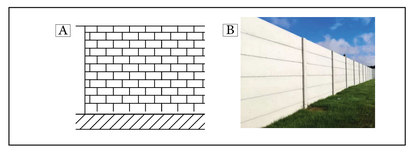

Boundary Treatment 6 :

Proposed retaining / low wall & retaining to seperate perimeter footpath from lower levels to north, east and west of back to back units. To consist of fill height 1.2m railing or low plastered plastered blockwork wall to 600mm above adjacent higher surface level depending on retaining requirement, with 600mm high powder coated steel railing on top, in addition to hedging as shown on landscape plan. .

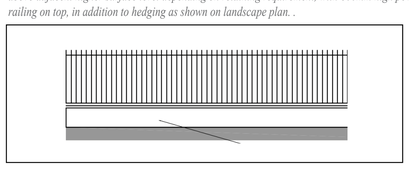

Boundary Treatment 7:

Native mixed hedge to provide uniform frontage to the south of the site along the link road and surrounding existing open space to south east. Supplemented by trees at intervals as per landscape plans.



Boundary Treatment 8 :

Existing timber post and wire fence surrounding existing attenuation area to the south east of the site to be retained, and fronted with a propsoed uniform hedgeline as per boundary treatment no.4



Boundary Treatment 9 :

Existing timber panel fencing along rear garden boundaries of adjoining properties to the south east fo the site




Boundary Treatment 10 :

Low to mid size garden hedging to create soft surrounds to back to back units. Low to mid size evergreen hedging as specified in landscape plans.




Boundary Treatment 11 :

Green powder coated palladine weldmesh fence to be inserted adjacent to existing tree / hedgerow boundary for minimal impact on rootzone areas. Height 2.1metres.

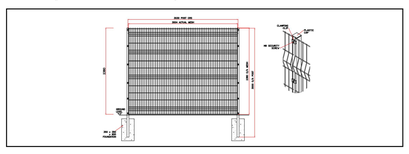

Boundary Treatment 12 :

Low supprt wall faced brick avg 600mm high with 1.2m high decorative steel railing on top, for retaining function-protection and security at selected change of level adjacent house entrances

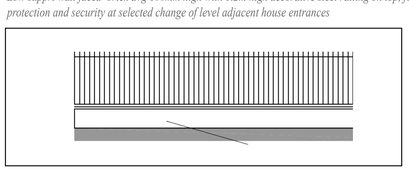


Boundary Treatment Types


1


2



3

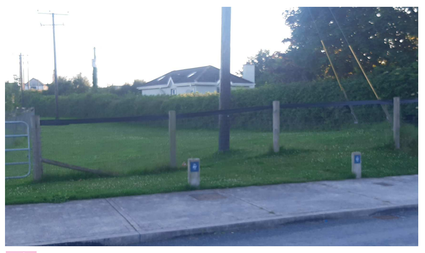
4


5


6


7

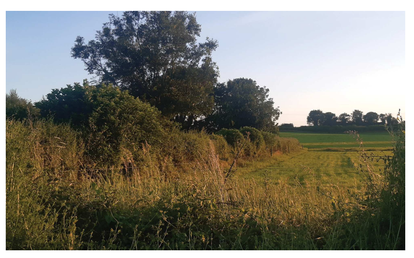
8

Scale 1 : 500 at A0
(1 : 211 @A1) (1 : 300@A2)

Project :	Residential Development (LRD) at Southgreen rd, Kildare.	Client :	Pousterle Ltd.
Drawing No.	(Planning) 26/ PL/ SG2/LRD/ 013 Rev B	Notes :	
Date :	Feb 24th 2026		
Design / Checked:	AR		

Boundary Treatment Proposals

LRD Stage 2 Presentation.
Individual plants to be keyed in to plans for final application.

Hayes Ryan Landscape Architecture
Landscape Architects, Horticulture & Environmental Consultants
www.hayesryan.com
Kilmead, Athy, Co. Kildare.
info@hayesryan.com
Tel 01- 6875095