

Project:

Large-scale Residential Development at Caheranardrish, Limerick, Co. Limerick

Report Title

Surface Water Design Report

Document Reference

24051-OSL-00-RP-C-0011



Civil, Structural & Project Engineering Services
Unit 38 Eastgate Drive, Little Island, Cork T45 YO49

JULY 2026

Document Control

Project	Large-scale Residential Development at Caheranardrish, Limerick, Co. Limerick		
Client	Homeland Projects Ltd.		
Document Title	Surface Water Design Report		
File Ref	24051-OSL-00-RP-C-0011	Rev	P03

Rev.	Status	Date	Description	Prepared	Reviewed	Approved
P01	S2 – For Information	06/03/26	For Stage 1 Surface Water Audit	BJM	DB	DB
P02	S2 – For Information	03/04/26	For Planning	BJM	DB	DB
P03	S2 – For Information	27/07/26	Response to Further Information Request	BJM	DB	DB

Disclaimer

This specification has been prepared for the exclusive use of our Client and unless otherwise agreed in writing by the Designer no other party may use, make use of or rely on the contents of this specification.

The specification has been compiled using the resources agreed with the Client and in accordance with the scope of work agreed with the Client. No liability is accepted by The Designer for any use of this specification, other than the purpose for which it was prepared.

The Designer accepts no responsibility for any documents or information supplied to the Designer by others and no legal liability arising from the use by others of opinions or data contained in this specification. It is expressly stated that no independent verification of any documents or information supplied by others has been made.

The Designer has used reasonable skill, care and diligence in compiling this specification and no warranty is provided as to the report's accuracy.

CONTENTS

Document Control	2
1.0 Introduction.....	4
2.0 Response to Further Information Request	5
3.0 Site Specific Flood Risk Assessment.....	6
4.0 Surface Water Drainage Design	7
4.1 Existing services.....	7
4.2 Proposed Surface Water Drainage Strategy	7
4.3 Infiltration Testing – Methodology and Results	9
4.4 Surface Water Design Criteria	10
4.5 Sustainable Urban Drainage Systems (SuDS)	12
4.6 Long-term Storage and Criterion 4 Compliance	15
4.7 Greenfield Runoff Rates and Criterion 2 Compliance	16
4.8 Surface Water Runoff Coefficients	18
4.9 Surface Water Catchment and Infiltration Management.....	18
4.10 Interception Volume.....	20
4.11 Treatment Volume.....	21
4.12 Internal Surface Water Collection Network	21
5.0 Pollution Hazards Indices Based on the Simple Index Approach.....	22
6.0 Maintenance Plan and Maintenance Schedules.....	26
7.0 Aquifer Vulnerability Assessment and Justification for Infiltration Measures	27
8.0 Summary.....	28
Appendix A – Flood Risk Assessment	
Appendix B – Surface Water Critical Storm by Return Period	
Appendix C – Site Infiltration Tests	
Appendix D – Green Roof Details	
Appendix E – Bypass Interceptor Details	
Appendix F – Attenuation Systems	
Appendix G – Flow Control Device Details	
Appendix H – Greenfield Runoff Rate Calculations	
Appendix I – SuDS Calculations and Summary	
Appendix J – Interception and Treatment Volumes Calculations	

1.0 INTRODUCTION

OSL Butler Consulting Engineers (OSL) has prepared this Surface Water Design Report on behalf of Homeland Projects Ltd., for a proposed Large-Scale Residential Development at Caheranardish, Limerick, County Limerick on a circa 6-hectare site.

The site is located to the southwest of Limerick City, centred at grid reference E: 553437.955, N: 653504.924 (ITM) as highlighted in Figure 1 below.

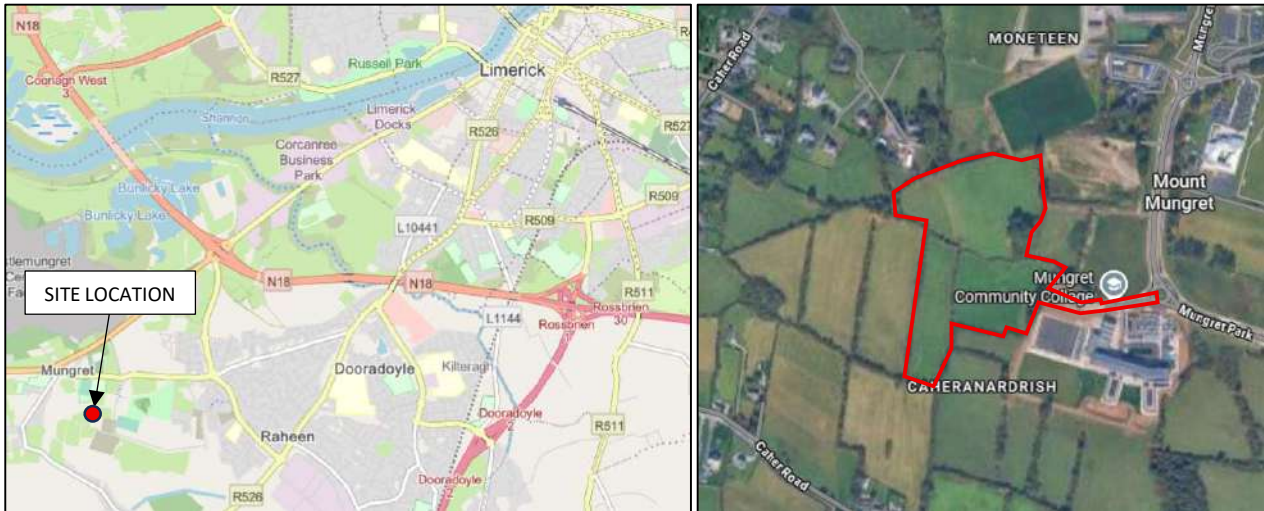


Figure 1: Site Location (Site boundary shown indicatively)

The lands are bound to the north by Mungret St Pauls GAA, to the west, east and south by existing agricultural land and to the southeast by the existing Mungret Community College.

The development will consist of a Large-scale Residential Development (LRD), comprising of 182no. residential dwellings as follows: 141no. houses consisting of 104no. detached/semi-detached dwellings (24no. 4-beds, 78no. 3-beds and 2no. 2-beds), 37no. townhouses (18no. 3-beds and 19no. 2-beds) and 41no. apartment units across 1no. triplex unit (2no. 2-beds and 1no. 1-bed) and a five-storey apartment building (13no. 2-beds and 25no. 1-beds) with a crèche with capacity to accommodate 70no. children at ground floor level.

The proposed development will include the provision for car parking, including EV charging points and bicycle parking. The proposed development will also include the provision of private, communal, and public open spaces; internal roads and pathways; pedestrian and cyclist routes; hard and soft landscaping and boundary treatments; waste storage; plant; signage; a new vehicular and pedestrian access onto the Mungret Park Road; public lighting; substations; all associated site development works; and all drainage and foul sewer infrastructure and network works including connections to the existing networks and nature-based suds measures.

Access to the proposed development will be via a proposed vehicular and pedestrian access to the existing Mungret Link Road.

2.0 RESPONSE TO FURTHER INFORMATION REQUEST

With reference to the Request for Further Information issued by Limerick City and County Council on 29 May 2026 in respect of Planning Reference 26/60396, the following provides the Applicant's response to Items 3 and 5, insofar as they relate to the proposed surface water management and drainage design.

LCCC FI Item 3:

'It is noted that it is proposed to discharge excess stormwater from the site to ground (at an existing discharge point), apparently in the vicinity of the Mungret Link Road. Please clarify that there is sufficient capacity in this outfall to discharge the additional loading without adversely affecting groundwater flow pattern or quality.'

Response to Item 3:

The revised surface water drainage design prepared in response to Item 5 (below) omits the previously proposed surface water pumping station and associated emergency discharge of excess surface water at the existing discharge point (Mungret Link Road). Accordingly, the discharge arrangement referenced in Item 3 no longer forms part of the proposed development, and the capacity and groundwater-related matters raised under this item are therefore no longer applicable.

LCCC FI Item 5:

'The proposed surface water pumping station shall be omitted in its entirety and in lieu of same, an enlarged surface water storage area or separate storage area shall be provided to fully compensate for the removal of same. The storage area shall be designed and constructed to be capable of accommodating emergency over-pumping by Limerick City and County Council through the installation of a temporary pump, thereby ensuring resilience within the surface water drainage system and preventing potential flooding events. This revised arrangement shall be supported by updated surface water drainage calculations and drawings, demonstrating that the proposed storage provision is sufficient to serve the development under all relevant design storm events.'

Response to Item 5:

In response to Item 5, the proposed surface water pumping station has been omitted in its entirety, and the surface water drainage design has been revised accordingly. Additional attenuation and infiltration storage has been provided to accommodate all relevant design storm events without reliance on pumping or discharge to the public surface water network.

A dedicated stand-off manhole incorporating a sump is provided as a closed-ended emergency access point from which surface water may be temporarily over pumped by Limerick City and County Council, should this be required during an exceptional emergency. The stand-off manhole does not provide a permanent connection or routine discharge to the public surface water network and does not form part of the normal operation of the drainage system.

The design rationale, operational intent and details of the revised surface water drainage arrangement are set out under the following sections of this report. These are supported by revised drainage calculations and drawings demonstrating the adequacy and resilience of the proposed storage and drainage system.

3.0 SITE SPECIFIC FLOOD RISK ASSESSMENT

OSL has prepared a Site Specific Flood Risk Assessment, 24051-OSL-00-RP-C-0007, on behalf of Homeland Projects Ltd. for the proposed development.

A copy of the aforementioned Flood Risk Assessment has been included within Appendix A of this report.

The following is the summary of the flood risk assessment:

- The site including all proposed residential dwellings is located in Flood Zone C as defined by the requirements of “The Planning System and Flood Risk Management, Guidelines for Planning Authorities” and its Technical Appendices.
- Following the Flood Risk Assessment Stage 2 (Initial Flood Risk Assessment), it was determined that a Justification Test was not required.
- To prevent an increase in flood risk, the proposed development incorporates SuDS, attenuation and infiltration measures designed to retain and infiltrate surface water within the site, with no routine discharge to the public surface water network or a watercourse. The proposed drainage strategy will therefore not increase flood risk elsewhere.

In conclusion, the proposed development is considered to have the required level of flood protection up to and including the 1% AEP storm event.

4.0 SURFACE WATER DRAINAGE DESIGN

4.1 EXISTING SERVICES

There is an existing 300mm diameter surface water sewer located within the Mungret Park Road to the southeast of the subject site. This surface water sewer was installed as part of the Mungret Park Road works (Mungret LIHAF Road) and services the lands adjacent to the Mungret Park Road (Mungret LIHAF Road).

This surface water sewer drains northwards, continuing within the Mungret Park Road, and was designed, as part of the Mungret LIHAF Extension works, to accommodate future development of the lands adjacent to the Mungret Link Road.

There is no other existing surface water infrastructure within the subject site.

4.2 PROPOSED SURFACE WATER DRAINAGE STRATEGY

The proposed development will be served by a new internal surface water collection, attenuation and infiltration system that is entirely independent of the existing public surface water network.

Interception, treatment, attenuation, infiltration and internal flow control of surface water runoff are described in the sections that follow.

Surface water management for the proposed development is designed to comply with the 'Greater Dublin Strategic Drainage Study (GDSDS) Regional Drainage Policies Technical Document - Volume 2, New Developments, 2005' and the 'Greater Dublin Regional Code of Practice for Drainage Works, V6.0 2005' including the Limerick City and County Council Surface Water/SuDS Specification 2022. CIRIA Design Manuals C753, C697 and C609 have also been consulted to design the surface water drainage system within the site.

The GDSDS guidelines require the following 4 main criteria to be provided by the development's surface water design;

- Criterion 1: River Water Quality Protection - satisfied by providing interception storage and treatment of run-off within the SuDS features e.g. permeable paving, tree pits, swales and detention basins.
- Criterion 2: River Regime Protection – satisfied by providing zero surface water discharge to a public sewer or watercourse.
- Criterion 3: Level of Service (flooding) for the site – satisfied by the site being outside the 1000 year coastal and fluvial flood levels. Pluvial flood risk addressed by development designed to accommodate a 100-year storm as per GDSDS. Planned flood routing for storms greater than 100-year level considered in design and development run-off contained within site.
- Criterion 4: River flood protection – satisfied by providing infiltration storage at least equal to the calculated Long-Term Storage Volume, thereby retaining the additional development runoff volume on site without discharge to the public drainage network or a receiving watercourse.

Surface water run-off from roof areas and hardstanding areas are designed to be collected by gravity pipe network. Surface water will be collected and managed through a combination of conventional drainage infrastructure and Sustainable Drainage Systems before being attenuated and infiltrated to ground within the site.

Due to the site topography and the invert levels of the existing public surface water infrastructure, a gravity connection to the public network is not feasible. The proposed development will therefore be drained entirely by infiltration, with no permanent or routine surface water discharge to the public drainage network or a receiving watercourse. Runoff will pass through the proposed SuDS treatment train, attenuation tanks and, where applicable, Class 1 bypass separators before infiltration to ground.

A dedicated stand-off manhole incorporating a sump is provided as a closed-ended emergency access point from which surface water may be temporarily over pumped by Limerick City and County Council during an exceptional emergency.

This provision does not constitute a permanent outfall and is not relied upon for the hydraulic operation or design capacity of the system.

The minimum diameter of the mainline surface water sewers is 225mm and minimum horizontal and vertical separation distances between proposed drainage and other services are as per the Uisce Éireann Code of Practice and Standard Details.

The surface water drainage network has been analysed for the risk of flooding for the 1 in 5-year, 1 in 30-year and 1 in 100-year rainfall events by means of simulating such events through hydraulic modelling in InfoDrainage. The InfoDrainage Simulation uses the Wallingford Procedure, time/area full hydrograph methodology, including energy and momentum equations for dynamic analysis of surface water networks. The site drainage network is modelled as one system where all flows, capacities, water levels, surcharged manholes etc are determined throughout the network for each critical storm duration.

An increase of 30% in rainfall has been included to account for climate change and 10% for urban creep.

The hydraulic analysis of the proposed surface water network as designed confirmed;

- No surcharging or flooding in the 1 in 5-year rainfall event
- No flooding in the 1 in 30-year rainfall event
- No flooding, and protection of properties in the 1 in 100-year rainfall event

Please refer to drawing 24051-OSL-11-DR-C-1120, Proposed Surface Water Layout, drawings 24051-OSL-11-DR-C-1121 to 1124 for the Proposed Surface Water Longitudinal Sections and Appendix B for the Infodrainage Report for the Critical Storm by Return Period (which includes the 5-year return period results for the design of pipes).

4.3 INFILTRATION TESTING – METHODOLOGY AND RESULTS

To determine the suitability of infiltration techniques as part of the site's surface water drainage strategy, infiltration testing was undertaken in accordance with CIRIA Report 156/BRE Digest 365: Soakaway Design (1991). This method is the standard approach recommended for assessing the infiltration capacity of soils for SuDS systems, including soakaways, infiltration trenches, raingardens, and similar features.

The BRE 365 method requires the excavation of trial pits to the proposed base depth of the infiltration system, typically at least 1m below the invert of the proposed infiltration feature. Each trial pit is then filled with water to simulate real-world conditions and to assess how quickly water infiltrates into the ground. The fall in water level over time is recorded during multiple test repetitions to determine the infiltration rate of the underlying soils. The infiltration rate (expressed as m/s) is then used in the design of infiltration features to ensure sufficient capacity and performance.

In line with BRE 365 requirements:

- The trial pits were excavated to relevant depths based on proposed infiltration system design.
- The tests were conducted over three full test cycles per pit (where possible or allowed) to ensure reliability and consistency.
- Soil conditions, stratigraphy, and groundwater presence were recorded to contextualize infiltration performance.

4.3.1 Test Location and Ground Conditions

4 no. Trial Pits were identified. Their locations were chosen to coincide with SuDS (infiltration) features on site and has been identified in Figure 2 below. Trial pits were dug to 1.0m – 2.0m below ground level and soil characteristics generally found can be described as;

- 0.00 – 0.20m Topsoil – Dark brown, soft, organic
- 0.20 – 1.20m Silty sand – Light brown, soft, occasional gravel
- 1.20 – 2.00m Limestone – Grey, weathered bedrock

No groundwater was evident during testing.

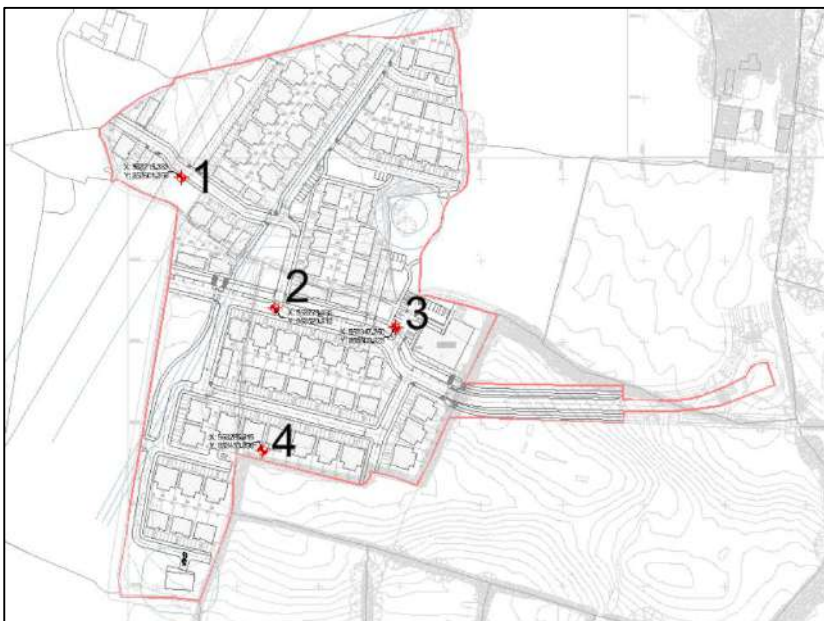


Figure 2: Site Infiltration Test Locations

4.3.2 Summary of Infiltration Test Results

Table 1 below summarises the infiltration test results.

Table 1: Summary of Infiltration Test Results

Trial Pit	Test Depth (m bgl)	Test Cycles Completed	Average Infiltration Rate (m/s)	Average Infiltration Rate (mm/hr)	Comments
1	1.5	1	8.048 x10-6	28.975	Generally suitable for infiltration design (good)
2	1.5	3	7.844 x10-5	282.371	Generally suitable for infiltration design (good)
3	1.5	3	4.727 x10-5	170.171	Generally suitable for infiltration design (good)
4	1.5	2	2.192 x10-5	78.894	Generally suitable for infiltration design (good)

The results indicate that the underlying soils at the site are capable of supporting infiltration-based SuDS features. All infiltration rates fall within typical ranges suitable for soakaway design as per BRE 365 guidance. These findings, combined with the high-vulnerability classification of the aquifer and the inclusion of pollutant removal measures within the drainage design, confirm that infiltration is a feasible and environmentally appropriate drainage solution at this location.

A copy of the Infiltration Tests and Results have been included within Appendix C of this report.

4.4 SURFACE WATER DESIGN CRITERIA

The surface water management system for the proposed development has been designed with reference to all relevant legislation, standards, guidance and best-practice requirements.

The principal documents that informed the basis of the design include, but are not limited to, the following:

- 'Greater Dublin Strategic Drainage Study (GDSDS) Regional Drainage Policies Technical Document - Volume 2, New Developments, 2005'
- 'Greater Dublin Regional Code of Practice for Drainage Works, V6.0 2005'
- Limerick City and County Council Surface Water/SuDS Specification 2022
- Limerick City and County Council Surface – Green and Blue Infrastructure Strategy 2021
- Implementation of Urban Nature-based Solutions – Guidance Document for Planners, Developers and Developer Agents, V1.0 November 2024
- CIRIA Design Manuals C753, C697, C644 and C609 have also been consulted to design the surface water drainage system within the site.
- Department of Environment and Local Government - Recommendations for Site Development Works for Housing Areas (1998), Table 3.1.
- IS EN 752:2008 - Drain and Sewer Systems Outside Buildings, Table 2
- Building Regulations (2005) - Section H - Drainage and Wastewater Disposal, Section 1.5.7

Table 2 below describes the surface water design parameters used.

Table 2: Surface Water Drainage Design Parameters

Description	Value
Return Period Target	Hydraulic Pipe Design 1 in 5 years (no surcharging) Network Design 1 in 30 years (no flooding) Network Design 1 in 100 years (no flooding, property protection)
Climate Change	30%
Urban Creep	10%
Freeboard to FFL	500mm
M5-60	16.9 (as per Met Eireann Records)
Ratio R	0.318
SOIL Type	2
Soil Value	0.3
Rainfall Intensity for initial pipe sizing	50 mm/hr
SAAR	990.1mm
Minimum pipe diameter	225mm (150mm for road gully connections)
Minimum pipe velocities	1.0m/s
Roughness	ks 0.6mm (0.15mm for uPVC)
Minimum Depth	1.2m cover under highways 0.9m elsewhere 0.75m with use of Class Z concrete surround
Site Surface Water Discharge	0 l/s – no permanent or routine discharge to the public surface water network or a watercourse
Internal flow-control method	Flow-control devices within the internal network to maximise attenuation and infiltration and manage transfer between system components
Emergency Provision	Closed-ended stand-off manhole for temporary emergency over pumping by LCCC; not part of normal system operation

4.5 SUSTAINABLE URBAN DRAINAGE SYSTEMS (SUDS)

It is proposed to use a Sustainable Urban Drainage System (SuDS) approach to stormwater management throughout the site where possible. The overall strategy aims to provide an effective system to mitigate the adverse effects of urban stormwater runoff on the environment by reducing runoff rates, volumes and frequency, reducing pollutant concentrations in stormwater, contributing to amenity, aesthetics and biodiversity enhancement and allow for the maximum collection of rainwater for re-use where possible. In addition, SuDS features aim to replicate the natural characteristics of rainfall runoff for any site by providing control of run-off at source and this has been achieved by the current proposals.

Surface water runoff will be treated by means of the SuDS measures discussed below, prior to entering the below ground attenuation and subsequent surface water system. The proposed SuDS features will reduce the runoff volume through evaporation, transpiration, infiltration and depression storage of the water within each system.

SuDS are a requirement under the 'Regional Code of Practice for Drainage Works' and 'The Greater Dublin Strategic Drainage Study'. Additionally, these systems are recommended under the 2009 guidelines, 'The Planning System and Flood Risk Management'.

The maintenance plan and maintenance schedule for the proposed SuDS features are discussed in Section 6 of this report.

The sections that follow describe how the proposed SuDS measures provide runoff interception, treatment, attenuation and infiltration before surface water is discharged to ground within the site.

4.5.1 Green Roofs

It is proposed to provide Green Roofs for the proposed apartment buildings. The Green Roofs have been designed taking guidance from the Ciria Publications quoted previously.

Green Roofs are a roofing system with a vegetated surface and underlying layers designed to support plant growth while providing sustainable drainage benefits.

The Green Roofs will improve water quality, reduce the volume and rate of runoff entering the internal surface water network, can offer an amenity to residents and offers a biodiversity element to the site also. This addresses the four pillars of SuDS design.

Typical details of the Green Roof construction build up have been included in Appendix D of this report.

4.5.2 Bypass Interceptors

A proprietary oil/water separator is proposed to reduce the risk of hydrocarbons and other pollutants entering the downstream infiltration system and underlying groundwater.

Bypass separators fully treat all flows generated by rainfall rates of up to 6.3mm/hr. This covers over 99% of all rainfall events. Flows above this rate are allowed to bypass the separator. These separators are used when it is considered an acceptable risk not to provide full treatment for high flows, for example where the risk of large spillage and heavy rainfall occurring at the same time is small. Class 1 devices are designed to achieve a concentration of less than 5mg/l of oil under the standard test conditions.

The Petrol Interceptors will be fitted with an alarm/messaging system housed within a kiosk, including vent pipes, all suitably located within the development.

Please refer to drawings 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Details that includes details of the bypass interceptors and vent stack/pipes.

Details of the proposed Bypass Interceptors have been included in Appendix E of this report.

4.5.3 Swales

Broad, shallow drainage channels covered in grass which can treat, convey and attenuate runoff, at source, and can infiltrate to the ground where the subgrade is suitable. Swales also can promote biodiversity.

Swales are proposed along the development's landscaped paved areas where possible. Surface water runoff from these paved areas, including adjacent roofs where suitable, will discharge to this SuDS feature for interception and treatment prior to entering the drainage network. A high-level overflow to the drainage network within the build-up will accommodate removal of water.

CIRIA C753 (The SuDS Manual) Table 24.6 notes that pavements drainage by swales can be considered to provide interception.

Please refer to drawings 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Details that includes details of the swales.

4.5.4 Tree Pits

Trees can be planted within a range of infiltration SuDS components to improve their performance, as root growth and decomposition increase soil infiltration capacity. Alternatively, they can be used as standalone within soil-filled tree pits, tree planters or structural soils, collecting and storing runoff and providing treatment via filtration and phytoremediation. Tree pits and planters will be designed to collect and attenuate runoff by providing additional storage within the underlying structure. The soils around trees can also be used to filter out pollutants from runoff directly.

Tree pits are proposed to be in green space areas to treat and control runoff, while at the same time providing amenity value to adjacent pedestrian, and residential zones. It is also proposed, where possible to fit tree pits along the estate road to drain and treat surface water runoff from the road network. This will allow for treatment of first flush and low flows while high flows will discharge into the surface water network during extreme rainfall events. Rainwater gullies will still be provided downstream of any tree pit to drain runoff during an extreme rainfall event.

Please refer to drawings 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Details that includes details of the Tree Pits.

4.5.5 Permeable Pavers

Porous surfacing (paving block or open graded material) which can treat rainwater, at source, and allow infiltration through to an underlying porous subbase where water can be stored within the voids of the subbase before being slowly released to the drainage collection system through natural flow via the porous medium. In this development, partial infiltration systems are proposed for those parking spaces that are located an adequate distance away from structures and includes a permeable geotextile at its base as well as an outlet to the surface water system. Sealed systems are proposed for those parking spaces that are considered as being in close proximity to buildings (e.g. driveways).

These systems will allow some form of storage/attenuation for small rainfall events, allow infiltration for those with permeable geotextile at its base, water evaporation and adsorption in small quantities, therefore there will be less runoff from these areas in small rainfall events thus mimicking the natural response for this catchment. Permeable Pavers are proposed for the public car park areas (e.g. creche, amenity parking) as well as in private driveways.

They will be connected by means of overflow systems (for partial infiltration systems) and throttled outflow systems (in the case of no infiltration systems) to the development surface water network.

Please refer to drawings 24051-OSL-9010 and 9011 for the Proposed Road Details and 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Details that includes details of the permeable pavers, build-up, overflow and connection to surface water network.

4.5.6 Raised Raingarden Planters

A raised rain garden planter acts like a small rain garden and makes the area around a downspout more attractive. The raised planter typically has drainage holes in the bottom and overflow holes near the top. The bottom of the planter is filled with a suitable gravel with voids (typically 30-40%) which provides for a small attenuation facility with controlled discharge when full.

It is proposed to include raised raingarden planters to the front of dwellings where appropriate.

Please refer to drawings 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Construction Details that includes details of the raised raingarden planters.

4.5.7 Rainwater Harvesting

In relation to rainwater harvesting, an option is to provide a rainwater butts at each individual dwelling. This could be located to the rear of each unit. This rainwater butt will only have the ability to catch the rear sloping side of the dwelling and the reuse would be for watering plants.

The intention would be that these are provided retrospectively by the homeowner and does not currently form part of this surface water design.

4.5.8 Cellular Attenuation System:

Proprietary modular block or arch structure with a maintenance/inspection tunnel for providing underground surface water attenuation storage and can infiltrate run off to the ground where subgrade is suitable.

It is proposed to attenuate surface water from the proposed development with five attenuation tanks, located in open spaces throughout the development. The attenuation tanks have been sized to cater for a 1 in 100 year rainfall event with a 30% climate change allowance and 10% urban creep.

It is proposed that the attenuation tanks will be constructed as pluvial cubes, Wavin Aquacell ECO / Core-R (or similar approved). The attenuation tanks will be designed for site specific conditions (including buoyancy), installed, tested and certified by the approved supplier.

A silt trap manhole with a 450mm deep sump will be provided to intercept and trap silt/sediment, located upstream of each of the attenuation tanks.

The five attenuation systems proposed throughout the proposed development are each responsible for managing a sub-catchment within the larger development. The surface water attenuation design has been further elaborated on in Section 4.9 of this report.

Technical information of the proposed attenuation systems has been included in Appendix F of this report.

4.5.9 Basins, wetlands and ponds:

Basins, wetlands and ponds provide safe, contained storage for stormwater and allow it to infiltrate gradually or transfer at a controlled rate to downstream SuDS and infiltration components. This reduces flood risk while also providing treatment, amenity and biodiversity benefits.

It is proposed to incorporate detention basins in green spaces to compliment the SuDs strategy. These are vegetated depressions designed to store runoff on the surface and infiltrate it gradually into the ground. These basins will be dry except in periods of heavy rainfall.

The detention basins proposed will be located in green areas and will cater for some runoff from adjacent roadways and roofs, but primarily the open space areas where they are situated. The surface water design includes for 6 no detention basins as an initial interception measure, prior to entering the main network, for surface water run off management of some of the sub-catchments within the larger development. The detention basins are proposed to be gradually sloped from 0 level to 500mm deep.

CIRIA C753 (The SuDS Manual) Table 24.6 notes that pavements drainage by basins, wetlands and ponds can be considered to provide interception.

We confirm that the design has been undertaken with due regard to safety and risk mitigation, in accordance with the principles and best practices set out in the CIRIA SuDS Manual (C753). The design incorporates features that align with the guidance outlined in Section 36.5 of the manual, which emphasizes the importance of shallow side slopes (not steeper than 1 in 3), appropriate landscaping, controlled access where necessary, and clear visibility to deter unsafe behaviour. These measures ensure the detention basins are safe for all users while still fulfilling their function in surface water management.

4.5.10 Flow Control Device:

Flow-control devices are provided at strategic locations within the internal surface water network to regulate the transfer of runoff between system components and maximise the use of the available attenuation and infiltration storage. These devices do not control a discharge from the development to the public surface water network.

Please refer to drawings 24051-OSL-90-DR-C-9020 to 9026 for the Proposed Surface Water Details that includes details of the flow control device manhole.

Details of the proposed Flow Control Device have been included in Appendix G of this report.

4.6 LONG-TERM STORAGE AND CRITERION 4 COMPLIANCE

In addition to limiting the runoff rate through attenuation, the GDSDS requires that runoff volume from the site is limited in extreme events. The objective is to prevent the additional runoff volume generated by the development from contributing to downstream river flooding. This volume is calculated by comparing the 100-year 6-hour event for 'pre' and 'post' development and is referred to as "Long-Term Storage".

The calculated Long-Term Storage Volume establishes the minimum additional development runoff volume that must be retained on site. For the proposed development, this requirement is satisfied through infiltration storage in accordance with GDSDS Criterion 4.2.

Assuming that all paved and pervious areas continue to drain to the network, the long-term storage equation (GDSDS Section 6.7.3) simplifies to:

$$Vol_{xs} = RD \times A \times 10 \times \frac{PIMP}{100} \times (0.8 - SPR)$$

Where:

Vol_{xs} = Extra runoff volume (m^3) of development runoff over Greenfield runoff

RD = Rainfall depth for the 100 year, 6 hour event (mm)

A = Total Site Area, Hectares

PIMP= Impermeable Area as a percentage of the total area (values from 0 – 100)

SPR = SOIL index from Flood Studies Report

The calculated long-term storage to be provided is 931.108m³.

In accordance with Criterion 4.2 of the Greater Dublin Strategic Drainage Study, infiltration storage is proposed as the means of providing the required long-term volumetric runoff control. The Long-Term Storage Volume has been assessed as the additional runoff volume generated by the proposed development above the equivalent greenfield runoff volume for the 1-in-100-year, six-hour rainfall event.

The combined infiltration storage provided across the site is not less than the calculated Long-Term Storage Volume. The tanks have also been hydraulically assessed for the 1-in-100-year event, including the appropriate allowance for climate change and urban creep, across a range of storm durations. The assessment demonstrates that runoff is retained and infiltrated within the site without discharge to the public drainage system, flooding of buildings or transfer of flood risk to adjoining lands.

The infiltration design is supported by representative site-specific infiltration testing, groundwater-level information and geotechnical and groundwater-quality assessments. Conservative design infiltration rates and appropriate factors of safety have been applied, together with pretreatment, maintenance access and consideration of post-storm drawdown and consecutive rainfall events.

The surface water attenuation design has been further elaborated on in Section 4.9 of this report. Please refer to Appendix H for the Long-Term Storage Calculations.

4.7 GREENFIELD RUNOFF RATES AND CRITERION 2 COMPLIANCE

The proposed development will be drained entirely by infiltration, with no routine surface water discharge to the existing public drainage network or to a receiving watercourse. Accordingly, the permissible site discharge rates calculated in accordance with the GSDS (including LCCC Surface Water/Suds Specification 2022) do not represent proposed discharge rates or flow-control settings for the development. The proposed surface water discharge rate is 0 l/s and is therefore below the applicable greenfield runoff limits established under GSDS Criterion 2.

Notwithstanding the above, the greenfield runoff rates have been calculated and presented below for completeness and to demonstrate the applicable GSDS design benchmarks. These calculations also provide supporting information for the assessment of the proposed drainage strategy against the wider GSDS and LCCC runoff-control criteria.

According to the GSDS, the method used for determining peak flow rates for small greenfield catchments is the UK 'Institute of Hydrology Report 124, Flood Estimation for Small Catchments'. This method calculates $Q_{BAR_{rural}}$ which is the mean annual flood flow from a rural catchment.

Where long-term storage can be provided or is not necessary, surface water can be discharged at a higher value than $Q_{BAR_{rural}}$, this discharge rate ($Q_{BAR_{growth}}$) is dependent on the design return period and the corresponding growth factor from the GSDS Table 6.6. However, if longterm storage cannot be provided, the GSDS requires that the on-site discharge rate from the site should be kept to $Q_{BAR_{rural}}$ or 2 l/s/ha, whichever is greater.

Limerick City and County Council Surface Water/SuDS Specification 2022 requirements differ with the above GDSDS requirement in that the on-site discharge rate should be kept at the greater restriction between the calculated $QBAR_{rural}$ and 2 l/s/ha. This requirement has been used to establish the applicable greenfield runoff benchmark; however, it does not represent a proposed discharge rate because the development has no permanent surface water outfall.

The IH124 method calculates $QBAR_{rural}$ which is the mean annual flood flow from a rural catchment. As the subject site area is less than 50 hectares, the calculated $QBAR$ is to be linearly interpolated from the calculated value to produce a reduced allowable outflow based on the actual site area, as per GDSDS section 6.6.1.

$$QBAR_{rural} = 0.00108 \times (Area)^{0.89} (SAAR)^{1.17} (SOIL)^{2.17}$$

Where:

$QBAR_{rural}$ = Mean Annual Flood (m³/s)

Area = Catchment Area (km²)

SAAR = Standard Average Annual Rainfall (mm)

SOIL = SOIL index from Flood Studies Report

The Area used in the $QBAR_{rural}$ calculation is the Net Area Drained and not the Gross Area (red line boundary) of the site. The soil value can be determined from the Flood Studies Report - Winter Rainfall Acceptance Maps (WRAP). A more accurate approach is to use the 'The Classification of Soils from Winter Rainfall Acceptance Rate, Flood Studies Report Table 4.5' to determine soil type and determine the soil value from Table 6.7 from the GDSDS. The latter method is adopted for this site.

Permissible site discharge for the site has been determined as follows:

- Total Net Drained Area = 0.0558 km² (5.580 Ha)
- SAAR = 990.1mm (Met Éireann Extreme Rainfall\SAAR 1991-2020, Irish Grid Reference X 153316, Y 153488)
- SOIL Value= 0.30 (for soil type 2 from Table 6.7 from the GDSDS)

The $QBAR_{rural}$ for the development was calculated as 15.2 l/s.

As mentioned previously, in accordance with Limerick City and County Council's Surface Water/SuDS Specification 2022, site discharge levels should not exceed 2 l/s/ha or $Qbar$ whichever is the greater restriction.

The applicable greenfield runoff benchmark has been calculated as 11.2 l/s. The proposed site surface water discharge is 0 l/s and is therefore below this benchmark, satisfying the rate-control objective of GDSDS Criterion 2.

Please refer to Appendix H for the Greenfield Runoff Rate Calculations.

4.8 SURFACE WATER RUNOFF COEFFICIENTS

As discussed in this report previously, a large proportion of runoff is routed through SuDS features these will have an attenuating effect which reduce the rate of stormwater runoff for every rainfall event.

In accordance with Limerick City and County Council's Surface Water/SuDS Specification 2022, the Surface Water Runoff coefficients utilised for this site has been applied as follows:

- Hard surfaces inclusive of roofs, roads, footpaths and any other hard standing area = 1.00
- Green areas or park land = 0.20

When applying the run-off coefficients to the contributing areas, the Effective Catchment Runoff Coefficient was calculated as 0.59 (rounded up). This factor was applied to catchments and inflows within the Infodrainage hydraulic model and analysis. Please refer to drawing 24051-OSL-11-DR-C-1126 for the Surface Water Catchment Characteristics Layout.

4.9 SURFACE WATER CATCHMENT AND INFILTRATION MANAGEMENT

The proposed development catchment has been subdivided into 5 sub-catchments. A diagram, Figure 3, has been included below to illustrate the surface water network catchment locations, flow routes, attenuation features and controls.

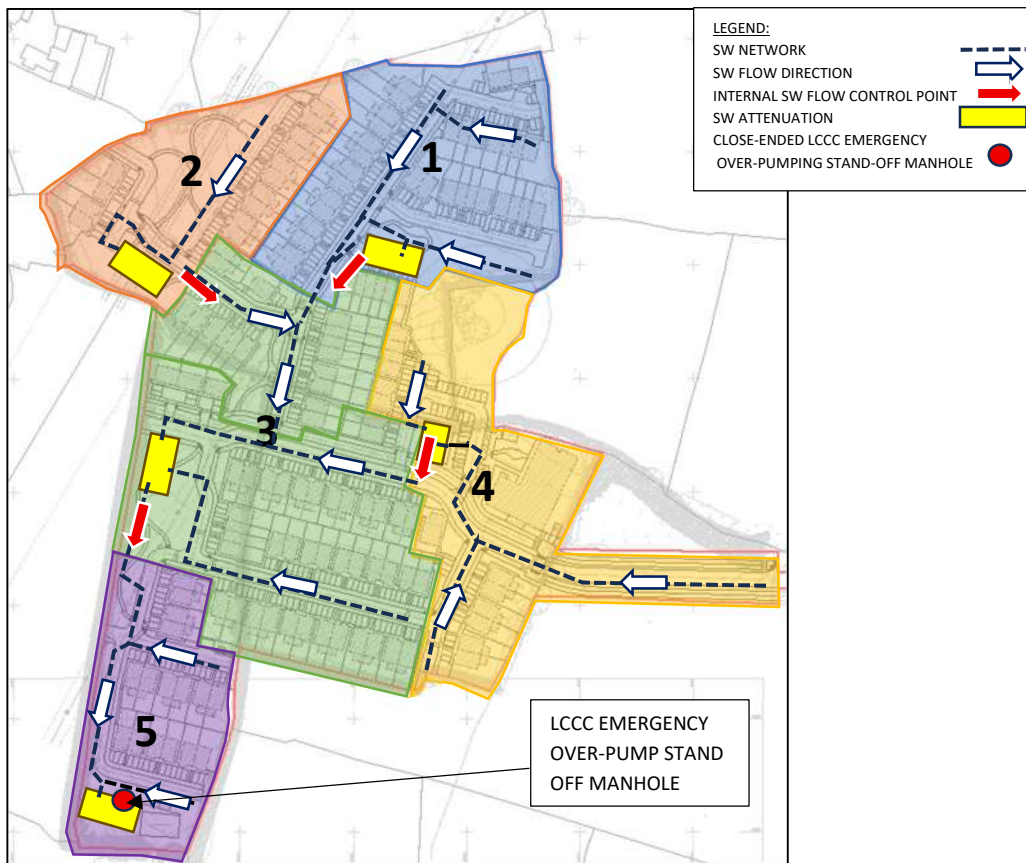


Figure 3: Surface Water Sub-Catchments

Table 3: Surface Water Sub-Catchment Summary

Sub-Catchment	Sub-Catchment Size (Total) m ²	Effective Runoff Coefficient	Sub-Catchment Size (Effective) m ²
1	9253.37	0.59	5476.48
2	7397.83	0.59	4378.3
3	20095.24	0.59	11893.1
4	12133.73	0.59	7181.18
5	6908.93	0.59	4088.95

4.9.1 Surface Water Attenuation and Infiltration

The proposed attenuation tanks have been designed as the principal attenuation and infiltration facilities for their respective sub catchments. Runoff entering each tank will be temporarily stored and infiltrated to ground using the conservative design infiltration rates established from the site-specific testing.

Flow-control devices are provided within the internal network to regulate the transfer of runoff between the attenuation and infiltration components, thereby maximising the use of the available storage. These devices control internal flows only and do not provide a discharge from the development to the public surface water network.

The internal surface water network terminates at a dedicated closed-ended stand-off manhole incorporating a sump. This manhole provides an access point from which Limerick City and County Council may undertake temporary emergency over pumping during an exceptional emergency. It is not a permanent outfall, does not provide a routine connection to the public surface water network and is not relied upon to achieve the design capacity of the drainage system.

The detention basins located above the attenuation tanks provide additional surface storage and a visible indication of abnormal system conditions. Safe exceedance routes have also been identified on Drawing No. 24051-OSL-11-DR-C-1127 to manage runoff should an event exceed the design standard or in the unlikely event of system malfunction.

The complete system has been hydraulically modelled in InfoDrainage for the relevant critical storm durations. The analysis demonstrates that runoff is retained and infiltrated within the development during the design events without discharge to the public surface water network, flooding of buildings or transfer of flood risk to adjoining lands.

The InfoDrainage Simulation uses the Wallingford Procedure, time/area full hydrograph methodology, including energy and momentum equations for dynamic analysis of surface water networks. The site drainage network is modelled as one system where all flows, capacities, water levels, surcharged manholes etc are determined throughout the network for each critical storm duration. Therefore, the final combined discharge rate to the existing sewer from the outlet will be kept at (or below) the total permissible discharge rate defined above.

Maximum rainfall data from Extreme Rainfall Return Period values produced by Met Eireann was used to input into InfoDrainage to determine maximum flood volumes and ensure protection of properties against flooding. Rainfall data for the site was sourced from an Annual Average Rainfall (AAR) Grid (1981-2010) and a Depth Duration Frequency model produced by Met Eireann (Available from: <http://www.met.ie/climate/products03.asp>). The design criteria that have been set out in the sections above, was input into InfoDrainage.

Table 4 below summaries the attenuation facilities provided, max water level results, freeboard provided to finished floor levels and discharge control proposed.

Table 4: Attenuation, Infiltration and Internal Flow Control Summary

Sub-Catchment	Critical Storm Event	Max Water Level During Critical Storm Event (m)	Facility Provided	Freeboard to adjacent/ne arby properties (mm)	Volume of Attenuation Provided (m ³)	Internal Flow Control Settings (l/s)
1	100 years: +30%; 600 mins Winter	18.243	Attenuation Tank 1	1057	277.489	2.0
2	100 years: +30%; 600 mins Winter	16.191	Attenuation Tank 2	1209	256.185	2.0
3	100 years: +30%; 240 mins Winter	13.088	Attenuation Tank 3	3082	472.544	6.0
4	100 years: +30%; 180 mins Winter	13.845	Attenuation Tank 4	1805	259.348	8.0
5	100 years: +30%; 960 mins Winter	13.105	Attenuation Tank 5	2181	324.527	

The flow-control values presented above relate solely to the regulation of flows between components of the internal drainage system. They do not represent a discharge from the development. The proposed site surface water discharge is 0 l/s.

The InfoDrainage design summary reports have been included within Appendix B of this report.

4.10 INTERCEPTION VOLUME

The GDSDS requires that no run-off should directly pass to the receiving watercourse for rainfall depths of up to 5mm, therefore interception should be provided at source where practicable. The volume of interception required is based on 5mm of rainfall depth from 80% of the runoff from impermeable areas as defined in the GDSDS (Appendix E section E2.1.1). As the proposal has no surface water outfall, intercepted runoff will be retained, reused, evapotranspired or infiltrated within the development rather than discharged to a receiving watercourse.

The interception volume attributable to each SuDS feature (swales, permeable paving, tree pits etc.) consists of the volume of water that can infiltrate to the ground, what will evaporate into the atmosphere and what can transpire through plants and vegetation. Additionally, there will some losses of water due to absorption and wetting of stone and soil media.

Not all SuDS features will be able to achieve infiltration, evaporation, transpiration and losses due to absorption/wetting. The limits for each SuDS feature type are considered when calculating interception volumes. The interception storage attributable to the losses in stone and soil media, such as the stone media used in filter drains was not included in the calculations.

The total interception volume required (as calculated) for the site is 132.073 m³. The interception volume provided for the site by means of swales, permeable paving, tree pits etc. equates to 847.7 m³ and exceeds the requirement.

Please refer to Appendix I for the SuDs Calculations and Summary Sheets.

Please refer to Appendix K for the Interception Volume Calculations and Appendix.

4.11 TREATMENT VOLUME

The GDSDS requires that a “treatment volume” (V_t) be provided in order to prevent any pollutants or sediments discharging into river systems, additionally a ‘treatment train’ stormwater runoff management system is required.

According to CIRIA document C697 the following treatment train approach is necessary:

- Roofs – 1 Treatment Stage
- Road Areas – 2 Treatment Stages
- Paved Areas excluding Roads - 1 Treatment Stage

The treatment volume is based on treatment of 15mm of rainfall depth from 80% of the runoff from impermeable areas as defined in the GDSDS (Appendix E section E2.1.2).

Runoff from each surface type will pass through the required SuDs treatment stages before entering the downstream infiltration system and being discharged to ground.

The total treatment volume required (as calculated) for the site is 396.22 m³. The treatment volume provided for the site by means of swales, permeable paving, tree pits etc. equates to 757 m³ and exceeds the requirement.

Please refer to Appendix I for the SuDs Calculations and Summary Sheets

Please refer to Appendix J for the Interception Volume Calculations.

4.12 INTERNAL SURFACE WATER COLLECTION NETWORK

Surface water from the proposed development will be conveyed through the internal gravity collection network to the relevant SuDS, treatment, attenuation and infiltration facilities. There is no permanent or routine surface water connection from the development to the public surface water network or a receiving watercourse.

Surface water sewers are designed in InfoDrainage using the Modified Rational Method with design criteria as established in the section above. Effective runoff coefficients for each pipe catchment have been determined based on the runoff characteristics for each surface contributing to flows within the catchment.

Values for roughness of uPVC pipes were obtained from Wallingford “Tables for the Hydraulic Design of Pipes, Sewers and Channels” and Wavinsewer systems catalogue.

All gullies will be positioned and designed in accordance with ‘The recommendations for site development works for housing areas’ published by the Department of the Environment’.

Please refer to Appendix B for the Infodrainage Report for the Critical Storm by Return Period (which includes the 5 year return period results for the design of pipes).

5.0 POLLUTION HAZARDS INDICES BASED ON THE SIMPLE INDEX APPROACH

The method used is guided by the land use and SuDS performance evidence. The design criteria for the Simple Index Approach are for the Total SuDS mitigation index (for each contaminant type) $\geq$ pollution hazard index (for each contaminant type). As shown below, in all cases the mitigation index is greater than the pollution index for each contaminant.

5.1.1 Step 1: Define Pollution Hazard Indices

Pollution hazard indices are presented in Table 26.2 of the CIRIA SuDS Manual (reproduced in Figure 4 below). These specify the hazard index for each contaminant type for different types of land use.

Land use	Pollution hazard level	Total suspended solids (TSS)	Metals	Hydro-carbons
Residential roofs	Very low	0.2	0.2	0.05
Other roofs (typically commercial/ industrial roofs)	Low	0.3	0.2 (up to 0.8 where there is potential for metals to leach from the roof)	0.05
Individual property driveways, residential car parks, low traffic roads (eg cul de sacs, homezones and general access roads) and non-residential car parking with infrequent change (eg schools, offices) ie < 300 traffic movements/day	Low	0.5	0.4	0.4
Commercial yard and delivery areas, non-residential car parking with frequent change (eg hospitals, retail), all roads except low traffic roads and trunk roads/motorways ¹	Medium	0.7	0.6	0.7
Sites with heavy pollution (eg haulage yards, lorry parks, highly frequented lorry approaches to industrial estates, waste sites), sites where chemicals and fuels (other than domestic fuel oil) are to be delivered, handled, stored, used or manufactured; industrial sites; trunk roads and motorways ¹	High	0.8 ²	0.8 ²	0.9 ²

Notes

¹ Motorways and trunk roads should follow the guidance and risk assessment process set out in Highways Agency (2009).

² These should only be used if considered appropriate as part of a detailed risk assessment – required for all these land use types (Table 4.3). When dealing with high hazard sites, the environmental regulator should first be consulted for pre-permitting advice. This will help determine the most appropriate approach to the development of a design solution.

Where a site land use falls outside the defined categories, the indices should be adapted (and agreed with the drainage approving body) or else the more detailed risk assessment method should be adopted.

Where nutrient or bacteria and pathogen removal is important for a particular receiving water, equivalent indices should be developed for these pollutants (if acceptable to the drainage approving body) or the risk assessment method adopted.

Figure 4: CIRIA SuDS Manual - Pollution hazard indices for different land use classifications

The proposed site consists of the following land uses;

- Residential Roads
- Individual property driveways, residential car parks and low traffic roads and non-residential car parking with infrequent change

5.1.2 Step 2: Determine SuDS Pollution Mitigation Indices

Indicative SuDS mitigation indices are presented in Table 26.3 of the CIRIA SuDS Manual (reproduced in Figure 5 below). These specify the mitigation index for each contaminant type for different types of SuDS measures.

TABLE 26.3 Indicative SuDS mitigation indices for discharges to surface waters

Type of SuDS component	Mitigation indices ¹		
	TSS	Metals	Hydrocarbons
Filter strip	0.4	0.4	0.5
Filter drain	0.4 ²	0.4	0.4
Swale	0.5	0.6	0.6
Bioretention system	0.8	0.8	0.8
Permeable pavement	0.7	0.6	0.7
Detention basin	0.5	0.5	0.6
Pond ⁴	0.7 ³	0.7	0.5
Wetland	0.8 ³	0.8	0.8
Proprietary treatment systems ^{5,6}	These must demonstrate that they can address each of the contaminant types to acceptable levels for frequent events up to approximately the 1 in 1 year return period event, for inflow concentrations relevant to the contributing drainage area.		

Notes

- 1 SuDS components only deliver these indices if they follow design guidance with respect to hydraulics and treatment set out in the relevant technical component chapters.
- 2 Filter drains can remove coarse sediments, but their use for this purpose will have significant implications with respect to maintenance requirements, and this should be taken into account in the design and Maintenance Plan.
- 3 Ponds and wetlands can remove coarse sediments, but their use for this purpose will have significant implications with respect to the maintenance requirements and amenity value of the system. Sediment should normally be removed upstream, unless they are specifically designed to retain sediment in a separate part of the component, where it cannot easily migrate to the main body of water.
- 4 Where a wetland is not specifically designed to provide significantly enhanced treatment, it should be considered as having the same mitigation indices as a pond.
- 5 See **Chapter 14** for approaches to demonstrate product performance. A British Water/Environment Agency assessment code of practice is currently under development that will allow manufacturers to complete an agreed test protocol for systems intended to treat contaminated surface water runoff. Full details can be found at: <http://tinyurl.com/qf7yuj7>
- 6 SEPA only considers proprietary treatment systems as appropriate in exceptional circumstances where other types of SuDS component are not practicable. Proprietary treatment systems may also be considered appropriate for existing sites that are causing pollution where there is a requirement to retrofit treatment. SEPA (2014) also provides a flowchart with a summary of checks on suitability of a proprietary system.

Figure 5 - Indicative SuDS mitigation indices for discharges to surface water

The proposed SuDS measures consist of swales, raised garden planters, tree pits, permeable pavement and detention basins. The raised raingarden planters, tree pits, detention basins and green roofs are considered as bioretention systems. Table 5 below summarises the risk indices for the development and Table 6 summarises the mitigation indices provided by the proposed SuDS measures.

Table 5 - Summary of Hazard indices for subject site

		Total Suspended Solids (TSS)	Metals	Hydrocarbons
Hazard Indices	Residential Roofs	0.2	0.2	0.05
	Individual property driveways, residential car parks and low traffic roads and non-residential car parking with infrequent change	0.5	0.4	0.4

Table 6 - Summary of Mitigation indices for subject site

		Total Suspended Solids (TSS)	Metals	Hydrocarbons
Mitigation Indices	Swales	0.5	0.6	0.6
	Permeable Pavement	0.7	0.6	0.7
	Bioretention Systems	0.8	0.8	0.08
	Detention Basins	0.5	0.5	0.6

The sections that follow summarises the specific SuDS measures proposed for each land use type.

5.1.3 Residential Roofs

The proposed development is a residential development and therefore the majority of roofs within the development will be classified as residential roofs. Run-off generated from the house/dwelling roofs within the development will be drained via raised raingarden planters (where feasible) and permeable paving.

Apartment roofs will be drained via green roofs, which is considered a bioretention system.

As shown in Table 7 below, these SuDS measures provide greater mitigation indices than the hazard indices and as such the proposed SuDS are deemed appropriate.

Table 7 – Comparison of Hazard and Mitigation indices for Residential Roofs

		TSS	Metals	Hydrocarbons
Hazard Indices	Residential Roofs	0.2	0.2	0.05
Mitigation Indices	Bioretention Systems	0.8	0.8	0.08
	Permeable Pavement	0.7	0.6	0.7

5.1.4 Driveways, car parks and low traffic roads

As mentioned previously, the proposed development is a residential development. The development includes parking areas and private driveways for the individual properties. The roads within the development can be classified as being low traffic roads.

These areas within the development will be drained via permeable paving and swales (where feasible). As shown in Table 8 below, these SuDS measures provide greater mitigation indices than the hazard indices and as such the proposed SuDS are deemed appropriate.

Table 8 – Comparison of Hazard and Mitigation indices for Other Roofs

		TSS	Metals	Hydrocarbons
Hazard Indices	Individual property driveways, residential car parks and low traffic roads and non-residential car parking with infrequent change	0.5	0.4	0.4
Mitigation Indices	Permeable Pavement	0.8	0.8	0.08
	Swales	0.5	0.6	0.6

5.1.5 Simple Index Approach Conclusion

The design criteria for the Simple Index approach are for the Total SuDS Mitigation Index (for each contaminant type) $\geq$ pollution hazard index (for each contaminant).

As shown above in all cases, the mitigation index is greater than the pollution index for each contaminant type. Therefore, the range of SuDS measures proposed satisfies the Simple Index Approach and provides adequate mitigation for the site.

6.0 MAINTENANCE PLAN AND MAINTENANCE SCHEDULES

Table 9 below sets out the proposed maintenance plan and maintenance schedules associated with the proposed surface water infrastructure.

Table 9: Proposed Maintenance Plan and Maintenance Schedule Summary

Item	Inspection Frequency	Inspection Type	Cleaning Mechanism	Cleaning Frequency
Road Gullies	Quarterly or after major storm event	Visual	Remove silt and solids by hand	Minimum every 2 years
Surface Water Manholes	Quarterly or after major storm event	Visual	Open manhole cover. Remove any debris.	Minimum every 2 years
Bypass Interceptor	Every 6 months or in the event of a spill	Visual	Petrol Interceptor to be emptied.	Yearly
Flow Control Device (Hydrobrake)	The aperture is to be checked for obstructions quarterly or after major storm events.	Visual	Remove silt and solids by hand.	Yearly
Green Roofs	Every 6 months	Visual	Inspect all components including soil substrate, vegetation, drains, irrigation systems (if applicable), membranes and roof structure for proper operation, integrity of waterproofing and structural stability.	Yearly
Permeable Pavement	Every 3 months	Visual	Brushing and vacuuming	Yearly
Swales	Every 6 months	Visual	Grass cutting.	Monthly during growing season
Attenuation Tanks	To be checked for debris or silt quarterly or after major storm event	Visual	Open inlet and outlet manhole cover. Remove any debris.	Yearly

7.0 AQUIFER VULNERABILITY ASSESSMENT AND JUSTIFICATION FOR INFILTRATION MEASURES

The Geological Survey Ireland (GSI) classifies the aquifer vulnerability in the area of the proposed development varies from "high" to "extreme" with some areas noted as having "rock at or near Surface or Karst".

According to GSI's national methodology for assessing groundwater vulnerability, a high or extreme rating suggests that contaminants can reach the water table relatively easily due to moderate subsoil thickness or permeability. However, this does not preclude the use of infiltration-based drainage solutions—it instead necessitates the integration of appropriate source control and pollutant attenuation measures to ensure protection of the groundwater resource.

Our surface water management strategy has been designed in alignment with best practice guidelines and incorporates a robust SuDS (Sustainable Drainage Systems) train, including (but not limited to) swales, detention basins and underground storage tanks with infiltration capabilities. The SuDS treatment train provides sedimentation, filtration and biological treatment upstream of the infiltration tanks. Class 1 bypass separators are also provided where required to reduce the risk of hydrocarbons and other gross pollutants entering the infiltration system.

GSI guidance recognises that when appropriate treatment systems are in place—especially those that offer multiple stages of attenuation and pollutant removal—infiltration can be suitable even in areas of high aquifer vulnerability. Our proposed system ensures that only sufficiently treated surface water is discharged to ground, offering both environmental protection and compliance with groundwater protection principles under the Water Framework Directive.

Given the high level of treatment incorporated and the nature of the surface water runoff (predominantly from low-risk areas such as roofs and landscaped surfaces), we are confident that infiltration to the underlying aquifer is an appropriate and sustainable approach in this context.

In addition to the aforementioned, a Hydrological & Hydrogeological Assessment (by IE Consulting) was commissioned by the applicant. This Assessment is included as part of this application under separate cover. The assessment investigated the risks that activities associated with the proposed development, during construction and operation might impact the nearby proposed Natural Heritage Area (pNHA) of Loughmore Turlough. This Assessment concludes that there will be no significant effect on water recharge to the Turlough from the proposed development.

8.0 SUMMARY

This report has outlined the Surface Water Design for the proposed Large-Scale Residential Development at Caheranardrish, Limerick, County Limerick on a circa 6-hectare site.

The findings are summarised as follows:

- In relation to Flooding, under the OPW Planning System and Flood Risk Management Guidelines published in November 2009, the proposed development is considered appropriate and located within Flood Zone C.
- The Infiltration Test Results indicate that the underlying soils at the site are capable of supporting infiltration-based SuDS features. All infiltration rates fall within typical ranges suitable for soakaway design as per BRE 365 guidance.
- Surface water runoff will be managed through a treatment train comprising green roofs, swales, tree pits, permeable paving, raingarden planters, detention basins, attenuation tanks and Class 1 bypass separators, as applicable to the respective catchments.
- The development will have no permanent or routine surface water discharge to the existing public surface water network or to a receiving watercourse. The proposed site surface water discharge rate is therefore 0 l/s.
- The calculated greenfield runoff rate of 11.2 l/s is retained in the report as a design benchmark only and does not represent a proposed discharge rate.
- The drainage system has been hydraulically assessed for the relevant design storm events, including 30% climate-change and 10% urban-creep allowances. The assessment demonstrates that runoff can be retained and infiltrated within the site without flooding of buildings or transfer of flood risk to adjoining lands.
- A closed-ended stand-off manhole incorporating a sump is provided solely as an access point for temporary emergency over pumping by Limerick City and County Council during an exceptional emergency. It is not a permanent outfall, does not provide a routine connection to the public surface water network and is not relied upon for the normal operation or design capacity of the system.
- As part of the development, a number of different SuDS measures will be provided to minimise the impact on water quality and water quantity of the runoff and maximise the amenity and biodiversity opportunities within the site.
- The Simple Index Approach demonstrates that the proposed SuDS treatment train provides appropriate mitigation before discharge to ground. The groundwater vulnerability and hydrogeological assessments support infiltration as an appropriate drainage solution, subject to implementation and maintenance of the specified treatment measures.
- The Geological Survey Ireland (GSI) classifies the aquifer vulnerability in the area of the proposed development as "high" to "extreme". Given the high level of treatment incorporated and the nature of the surface water runoff (predominantly from low-risk areas such as roofs and landscaped surfaces), we are confident that infiltration to the underlying aquifer is an appropriate and sustainable approach in this context

Appendix A – Flood Risk Assessment

Project:

Large-scale Residential Development at Caheranardrish, Limerick, Co. Limerick

Report Title

Site Specific Flood Risk Assessment

Document Reference

24051-OSL-00-RP-C-0007



Civil, Structural & Project Engineering Services
Unit 38 Eastgate Drive, Little Island, Cork T45 YO49

MARCH 2026

Document Control

Project	Large-scale Residential Development at Caheranardrish, Limerick, Co. Limerick		
Client	Homeland Projects Ltd.		
Document Title	Site Specific Flood Risk Assessment		
File Ref	24051-OSL-00-RP-C-0007	Rev	P03

Rev.	Status	Date	Description	Prepared	Reviewed	Approved
P01	S2 – For Information	29/09/25	For Information	BJM	DB	DB
P02	S2 – For Information	13/10/25	For Information	BJM	DB	DB
P03	S2 – For Information	04/03/26	For Review	BJM	DB	DB

Disclaimer

This specification has been prepared for the exclusive use of our Client and unless otherwise agreed in writing by the Designer no other party may use, make use of or rely on the contents of this specification.

The specification has been compiled using the resources agreed with the Client and in accordance with the scope of work agreed with the Client. No liability is accepted by The Designer for any use of this specification, other than the purpose for which it was prepared.

The Designer accepts no responsibility for any documents or information supplied to the Designer by others and no legal liability arising from the use by others of opinions or data contained in this specification. It is expressly stated that no independent verification of any documents or information supplied by others has been made.

The Designer has used reasonable skill, care and diligence in compiling this specification and no warranty is provided as to the report's accuracy.

CONTENTS

Document Control	2
1.0 Introduction.....	4
1.1 Objectives	4
1.2 Existing Site.....	4
1.3 Site Topography.....	5
1.4 Proposed Development.....	5
2.0 Flood Risk Assessment Methodology	7
2.1 Methodology	7
2.2 Data Collection	10
3.0 Existing Hydrological Environment.....	11
3.1 Relevant Hydrological Features.....	11
3.2 Existing Geology and Hydrogeology of the Area	11
4.0 Existing Flood Studies	13
4.1 Historic Flooding.....	13
4.2 CFRAM Study	13
5.0 Flood Risk Assessment.....	14
5.1 Stage 1 - Flood Risk Identification	14
5.2 Stage 2 - Initial Flood Risk Assessment.....	14
5.3 Stage 3 - Detailed Flood Risk Assessment	16
6.0 Mitigation Measures.....	18
6.1 Effectiveness of Mitigation Measure.....	18
7.0 Conclusion	19

Appendix A – Historic Flood Reports

Appendix B – Flood Maps

1.0 INTRODUCTION

OSL Butler Consulting Engineers (OSL) has prepared this Site Specific Flood Risk Assessment on behalf of Homeland Projects Ltd., for a proposed residential development at Caheranardish, Limerick, County Limerick on a circa 6-hectare site.

1.1 OBJECTIVES

The aim of the FRA is to identify, quantify and communicate to decision makers and other stakeholders the risk of flooding associated with the proposed development and its impact on the receiving waters.

The FRA has been carried out in accordance with 'The Planning System and Flood Risk Management Guidelines' (hereafter referred to as the FRM Guidelines) published in November 2009 jointly by the then Department of the Environment, Heritage and Local Government, DEHLG, (now the Department of the Environment, Community and Local Government, DECLG) and the Office of Public Works (OPW) and the report assesses the site in accordance with the requirements of "The Planning System and Flood Risk Management Guidelines for Planning Authorities".

1.2 EXISTING SITE

The site is located to the southwest of Limerick City, centred at grid reference E: 553437.955, N: 653504.924 (ITM) as highlighted in Figure 1 below.

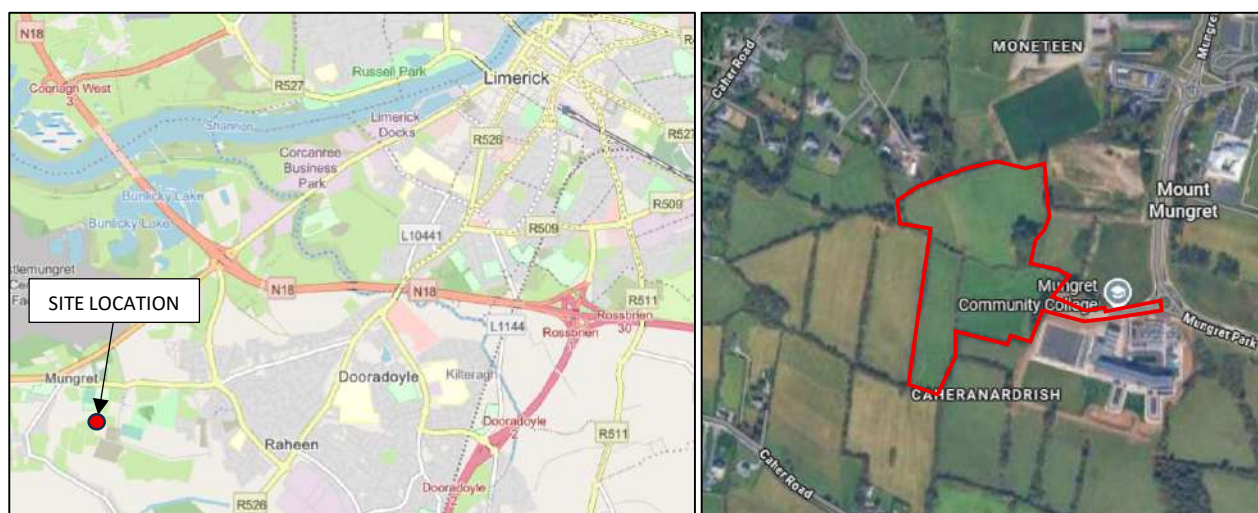


Figure 1: Site Location (Site boundary shown indicatively)

The lands are bound to the north by Mungret St Pauls GAA, to the west, east and south by existing agricultural land and to the southeast by the existing Mungret Community College.

1.3 SITE TOPOGRAPHY

Within the subject lands, ground levels predominantly fall in a southerly direction but undulates with crests and valleys in between. The site falls across the site from circa 19.86m OD from the north to the southern boundary at an elevation of approximately 13.60m OD.



Figure 2: Site Topography

1.4 PROPOSED DEVELOPMENT

The development will consist of a Largescale Residential Development (LRD), comprising of 182no. residential dwellings as follows: 141no. houses consisting of 104no. detached/semi-detached dwellings (24no. 4-beds, 78no. 3-beds and 2no. 2-beds), 37no. townhouses (18no. 3-beds and 19no. 2-beds) and 41no. apartment units across 1no. triplex unit (2no. 2-beds and 1no. 1-bed) and a five-storey apartment building (13no. 2-beds and 25no. 1-beds) with a crèche with capacity to accommodate 70no. children at ground floor level.

The proposed development will include the provision for car parking, including EV charging points and bicycle parking. The proposed development will also include the provision of private, communal, and public open spaces; internal roads and pathways; pedestrian and cyclist routes; hard and soft landscaping and boundary treatments; waste storage; plant; signage; a new vehicular and pedestrian access onto the Mungret Park Road; public lighting; substations; all associated site development works; and all drainage and foul sewer infrastructure and network works including a pumping station and connections to the existing networks and nature-based suds measures.

Access to the proposed development will be via a proposed vehicular and pedestrian access to the existing Mungret Link Road.



Figure 3: Proposed Site Layout

2.0 FLOOD RISK ASSESSMENT METHODOLOGY

2.1 METHODOLOGY

The methodology used for the flood risk assessment for the proposed development is based on 'The Planning System and Flood Risk Management, Guidelines for Planning Authorities' (2009). The FRM Guidelines require the planning system at national, regional and local levels to:

- Avoid development in areas at risk of flooding, particularly floodplains, unless there are proven wider sustainability grounds that justify appropriate development.
- Adopt a sequential approach to flood risk management when assessing the location for new development based on avoidance, reduction and then mitigation of flood risk; and
- Incorporate flood risk assessment into the process of making decisions on planning applications and planning appeals.

The sequential approach (see Figure 4 below) in flood risk management requires the following three steps to identify the necessity for the justification test for a development:

- Step 1: Identification of the Flood Zone at the proposed development site (Section 2.23 of the FRM Guidelines);
- Step 2: Identification of the vulnerability of the type of the proposed development (Table 3.1 of the FRM Guidelines); and
- Step 3: Using the matrix of vulnerability versus Flood Zone (Table 3.2 of the FRM Guidelines), identify the necessity for the justification test for the proposed development.



Figure 4: Sequential Approach Principles in Flood Risk Management (Extract of Figure 3.1 of the FRM Guidelines)

While Figure 3.1 of The FRM Guidelines (Figure 4 above) sets out the broad philosophy underpinning the sequential approach in the flood risk management, Figure 3.2 of the Guidelines (Figure 5 below) describes the mechanism of the sequential approach for use in the planning process.

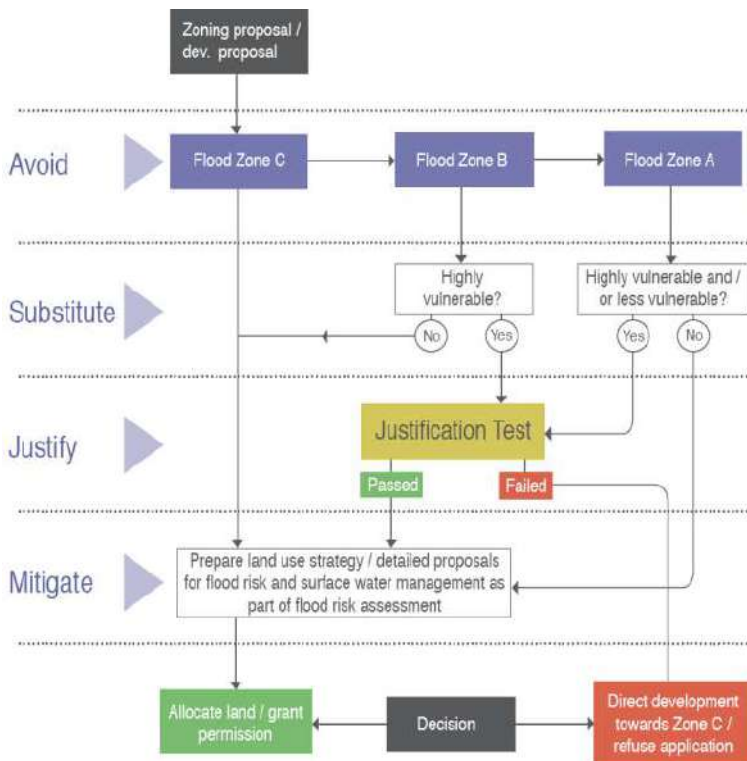


Figure 5: Sequential Approach Mechanism in the Planning Process (Extract of Figure 3.2 of the FRM Guidelines)

According to the FRM Guidelines, Flood Zones are graphical areas within which the likelihood of flooding is in a particular range. They are a key tool in flood risk management within the planning process as well as in flood warning and emergency planning. There are three Flood Zones, namely,

- Flood Zone A – where the probability of flooding from rivers and the sea is highest (greater than 1% AEP or 1 in 100 year for river flooding or 0.5% or 1 in 200 for coastal flooding);
- Flood Zone B – where the probability of flooding from rivers and the sea is moderate (between 0.1% AEP or 1 in 1000 year and 1% AEP or 1 in 100 year for river flooding and between 0.1% AEP or 1 in 1000 year and 0.5% AEP or 1 in 200 year for coastal flooding); and
- Flood Zone C – where the probability of flooding from rivers and the sea is low (less than 0.1% AEP or 1 in 1000 for both river and coastal flooding).

Flood Zones A, B and C are based on the current assessment of the 1% AEP and the 0.1% AEP fluvial events and the 0.5% AEP and 0.1% AEP tidal events, without the inclusion of climate change factors. Table 3.1 of the FRM Guidelines (Figure 6 below) shows the classification of the vulnerability to flooding of different types of development.

Vulnerability class	Land uses and types of development which include*:
Highly vulnerable development (including essential infrastructure)	Garda, ambulance and fire stations and command centres required to be operational during flooding; Hospitals; Emergency access and egress points; Schools; Dwelling houses, student halls of residence and hostels; Residential institutions such as residential care homes, children's homes and social services homes; Caravans and mobile home parks; Dwelling houses designed, constructed or adapted for the elderly or, other people with impaired mobility; and Essential infrastructure, such as primary transport and utilities distribution, including electricity generating power stations and sub-stations, water and sewage treatment, and potential significant sources of pollution (SEVESO sites, IPPC sites, etc.) in the event of flooding.
Less vulnerable development	Buildings used for: retail, leisure, warehousing, commercial, industrial and non-residential institutions; Land and buildings used for holiday or short-let caravans and camping, subject to specific warning and evacuation plans; Land and buildings used for agriculture and forestry; Waste treatment (except landfill and hazardous waste); Mineral working and processing; and Local transport infrastructure.
Water-compatible development	Flood control infrastructure; Docks, marinas and wharves; Navigation facilities; Ship building, repairing and dismantling, dockside fish processing and refrigeration and compatible activities requiring a waterside location; Water-based recreation and tourism (excluding sleeping accommodation); Lifeguard and coastguard stations; Amenity open space, outdoor sports and recreation and essential facilities such as changing rooms; and Essential ancillary sleeping or residential accommodation for staff required by uses in this category (subject to a specific warning and evacuation plan).
*Uses not listed here should be considered on their own merits	

Figure 6: Classification of Vulnerability of Different Types of Development (Extract of Table 3.1 of FRM Guidelines)

Table 3.2 of the FRM Guidelines (Figure 7 below) identifies the types of development that would be appropriate for each Flood Zone and those that would be required to meet the Justification Test. Since dwelling houses are classified as 'Highly vulnerable development' the section highlighted below presents the required actions for each flood zone.

	Flood Zone A	Flood Zone B	Flood Zone C
Highly vulnerable development (including essential infrastructure)	Justification Test	Justification Test	Appropriate
Less vulnerable development	Justification Test	Appropriate	Appropriate
Water-compatible development	Appropriate	Appropriate	Appropriate

Figure 7: Matrix of Vulnerability versus Flood Zone (Extract of Table 3.2 of FRM Guidelines)

The FRM Guidelines (Chapter 2) outlines the following three stages of flood risk assessment:

- Stage 1: Flood risk identification – to identify whether there may be any flooding or surface water management issues relating to the proposed development site that may warrant further investigations.
- Stage 2: Initial flood risk assessment – to confirm sources of flooding that may affect the proposed development site, to appraise the adequacy of existing information and to determine what surveys and modelling approach is appropriate to match the spatial resolution required and complexity of the flood risk issues. This stage involves the review of existing studies and hydraulic modelling to assess flood risk and to assist with the development of FRM measures.
- Stage 3: Detailed flood risk assessment – to assess flood risk issues in sufficient detail and to provide a quantitative appraisal of potential flood risk to a proposed or existing development, of its potential impacts on flood risk elsewhere and of the effectiveness of any proposed mitigation measures. This will typically involve use of an existing or construction of a hydraulic model across a wide enough area to appreciate the catchment wide impacts and hydrological process involved.

2.2 DATA COLLECTION

Data required for the flood risk assessment was obtained from various sources, as described below.

- The historic flood data was obtained from the National Flood Hazard Mapping website www.floodmaps.ie;
- The Subsoil and Aquifer vulnerability data was obtained from the Geological Survey of Ireland website www.gsi.ie;
- National CFRAM Study;
- Greater Dublin Strategic Drainage Study

3.0 EXISTING HYDROLOGICAL ENVIRONMENT

3.1 RELEVANT HYDROLOGICAL FEATURES

A review of Historical Ordnance Survey Ireland information (www.osi.ie) as well as the Environmental Protection Agency (EPA) Maps, was conducted to determine if the OSI 6- inch Maps indicated historic water courses / surface water features within the site.

The subject site is located within the Ballynaclogh_10 WFD River Sub Basin. The maps indicate existing watercourses to the south and west (Barnakyle, EPA Code 24B05) and to the east (Ballynaclogh, EPA Code 24B04) of the subject site. The River Shannon is located approximately 2.5km to the north and the River Maigue approximately 5.2km to the west of the subject site. These waterbodies are the main hydrological features in close proximity to the site.

There is no formal surface water network within the subject lands.

Figure 8 below illustrates the main hydrological features associated with the area in the vicinity of the site.

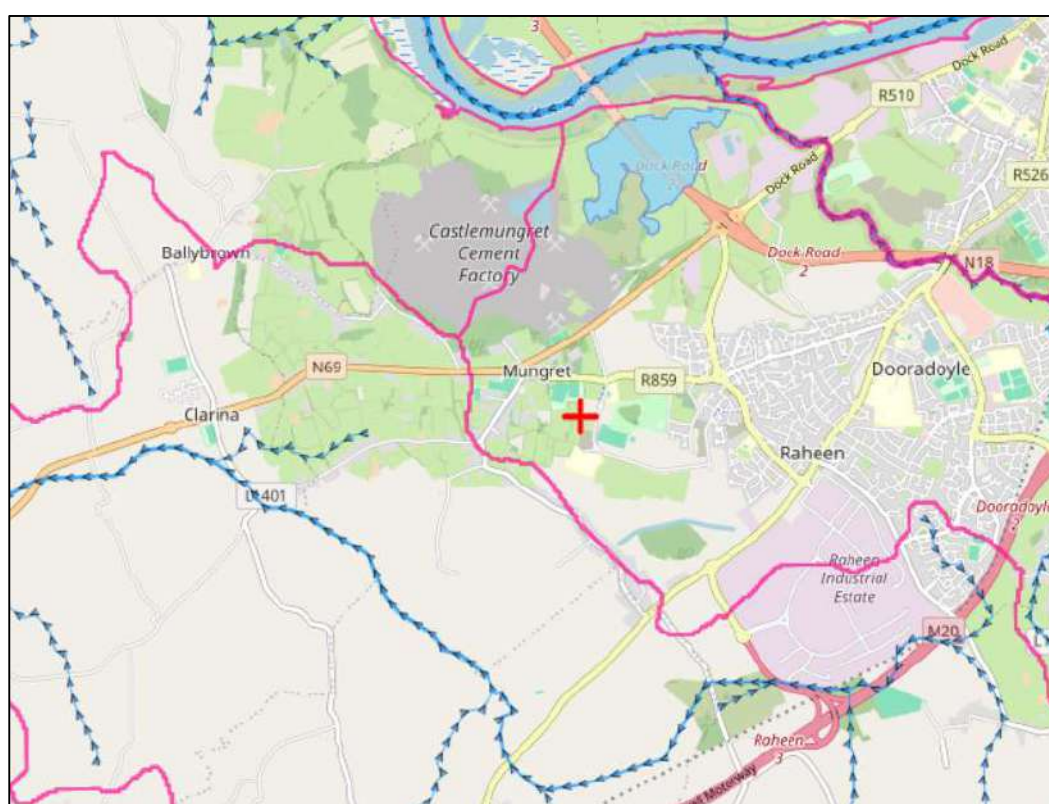


Figure 8: Hydrological Features, Geological Survey of Ireland (GSI)

3.2 EXISTING GEOLOGY AND HYDROGEOLOGY OF THE AREA

The Geological Survey of Ireland (GSI) website provides information on their public online mapping service at www.gsi.ie on aquifer vulnerability. The map presented in Figure 9 depicts the aquifer vulnerability for the proposed development site.

The interactive web-mapping site classifies the aquifer vulnerability in the area of the proposed development varies from "high" to "extreme" with some areas noted as having "rock at or near Surface or Karst". The GSI state that "Vulnerability is a term used to represent the intrinsic geological and hydrogeological characteristics that determine the ease with which groundwater may be contaminated by human activities". The GSI further describes that the vulnerability of groundwater depends on:

- The time of travel of infiltrating water (and contaminants);
- The relative quantity of contaminants that can reach the groundwater; and
- The contaminant attenuation capacity of the geological materials through which the water and contaminants infiltrate.



Figure 9: Extract from Geological Survey of Ireland (GSI)

4.0 EXISTING FLOOD STUDIES

4.1 HISTORIC FLOODING

The National Flood Hazard Mapping Website www.floodmaps.ie does not show any records of historic flooding occurring at the proposed development site. The nearest recoded flooding event is to the north, in Mungret Village which is approximately 0.6km the subject site.

The Historic Flood Record Reports have been included in Appendix A of this report

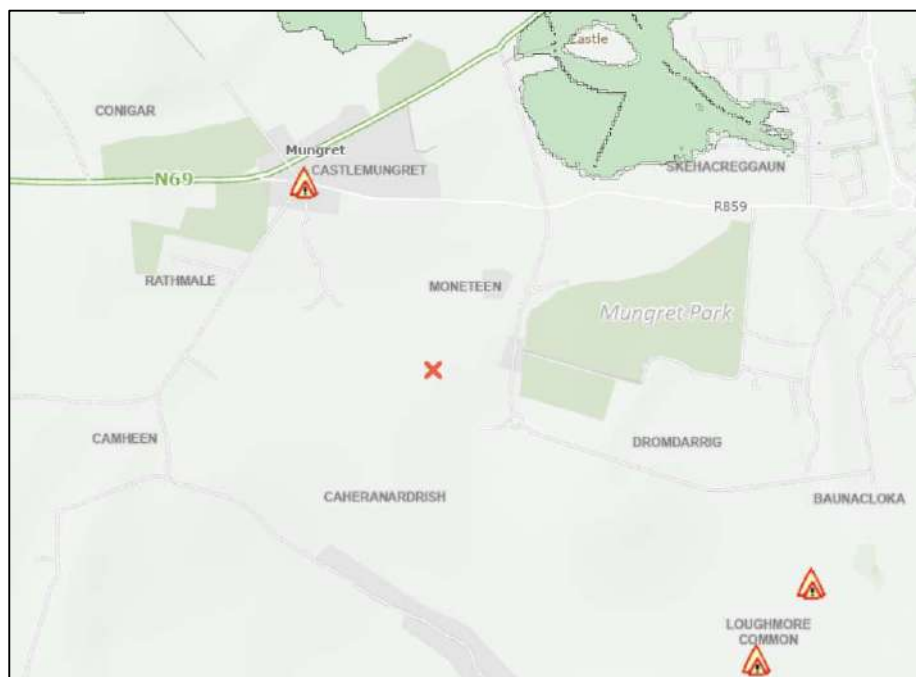


Figure 10: Extract from floodmaps.ie

4.2 CFRAM STUDY

The OPW, as lead agency for flood risk management in Ireland, is producing Flood Risk Management Plans (FRMP), in line with National Flood Policy and the requirements of the EU Floods Directive. Draft FRMP's are currently being produced by the OPW under the CFRAM Study. The Draft FRMP's make use of the information provided through the flood maps that have previously been produced under the CFRAMS Programme and previous parallel projects. The Draft FRMP's set out a range of proposed measures and actions to manage and reduce flood risk within the catchments and coastal reaches covered by each Draft Plan, focusing on the 300 areas of potentially significant flood risk around Ireland that were identified under the PFRA.

Having review the maps from the CFRAMS Flood extent maps there is no history of flooding on the site and in the vicinity of the site. The maps show that the flood extent does not extend to the proposed development site and demonstrates that the site lies outside of the 0.1% Fluvial AEP event and is therefore located within Flood Zone C.

The Flood Maps associated with the FRMP's have been included in Appendix B of this report.

5.0 FLOOD RISK ASSESSMENT

As outlined in Section 2 of this report the FRM guidelines identifies three stages of Flood Risk Assessment namely;

- Stage 1: Flood Risk Identification
- Stage 2: Initial Flood Risk Assessment
- Stage 3: Detailed Flood Risk Assessment

5.1 STAGE 1 - FLOOD RISK IDENTIFICATION

According to the FRM Guidelines, flood risk identification is the process for deciding whether a plan or project requires further investigation. This is a desk-based exercise based on existing information. All the existing information is described in Section 3 and the identification of flood risk from each of the five sources of flooding (coastal, fluvial (river), groundwater, pluvial (rainfall) and from artificial drainage systems) is considered.

5.1.1 Tidal Flood Risk

The CFRAMS Maps indicates that the proposed development site lies outside of the 0.1% AEP coastal flood event and hence is located within Flood Zone C for tidal flood risk, where the risk of flooding is low.

5.1.2 Fluvial Flood Risk

The CFRAMS Maps indicates that the proposed development site lies outside of the 0.1% AEP fluvial flood event and hence is located within Flood Zone C for fluvial flood risk, where the risk of flooding is low.

5.1.3 Groundwater Flood Risk

The aquifer vulnerability map (refer to Figure 9) classifies the site as having varied vulnerability ranging from "high" to "extreme" with some areas noted as having "rock at or near Surface or Karst". There is historical evidence of groundwater flooding approximately 0.5km north of the subject site at Mungret Village. There is no indication on the maps of any springs or wells on this site. Groundwater risk is therefore not considered to be significant.

5.1.4 Pluvial Flood Risk

The Flood Maps data shows no indication of previous pluvial related flooding at the site. During extreme rainfall events the application of SuDS principles will ensure surface water is managed sufficiently and sustainably discharged to the drainage network in accordance with the GDSDS. With these mitigation measures in place pluvial flood risk is not considered to be significant.

5.2 STAGE 2 - INITIAL FLOOD RISK ASSESSMENT

The Flood Risk Assessment has identified that there is a low flood risk to the site. Under the sequential approach identified in the FRM Guidelines a three-step approach is required to confirm the appropriateness of the development in terms of flood risk.

Step 1: Identification of the Flood Zone at the proposed development site

Using the Flood Zone criteria from the FRM Guidelines and as defined in Section 2 previously, the flood zones for each of the sites were determined.

- Flood Zone A – where the probability of flooding from rivers and the sea is highest (greater than 1% or 1 in 100 year for river flooding or 0.5% or 1 in 200 for coastal flooding);
- Flood Zone B – where the probability of flooding from rivers and the sea is moderate (between 0.1% or 1 in 1000 year and 1% or 1 in 100 year for river flooding and between 0.1% or 1 in 1000 year and 0.5% or 1 in 200 year for coastal flooding); and
- Flood Zone C – where the probability of flooding from rivers and the sea is low (less than 0.1% or 1 in 1000 for both river and coastal flooding).

As discussed above, the proposed development site lies within Flood Zone C – where risk of flooding is lowest.

Modelling hasn't been carried out but in this case is deemed unnecessary. Therefore, in this instance a freeboard well in excess of the GDSDS requirements is provided. No proposed dwellings are located in Flood Zone A or B. The extent of the predicted 1% and 0.1% AEP Flood Events are shown across adjacent lands on the north-western section of the site.

A Justification Test is not required as it falls outside the Flood Zones A and B.

Step 2: Identification of the vulnerability of the type of the proposed development (Table 3.1 of the FRM Guidelines)

The different types of proposed infrastructure are then assigned a vulnerability classification according to the definitions in 'Table 3.1 – Classification of vulnerability of different types of development' of the FRM Guidelines. As described in Section 1.2 above, the proposed development is dwelling houses. This is classified as 'highly vulnerable development'.

Step 3: Using the matrix of vulnerability versus Flood Zone (Table 3.2 of the FRM Guidelines), identify the necessity for the justification test for the proposed development

The proposed development site is located in Flood Zone C and is categorised as Highly Vulnerable Development. Table 3.2 of the FRM guidelines and Figure 3.2 – Sequential approach mechanism in the planning process (FRM guidelines) stipulate that a justification test is not required for such a development and is deemed appropriate development for the flood zone categories. Figure 11 below highlights the matrix of vulnerability versus flood zone.

	Flood Zone A	Flood Zone B	Flood Zone C
Highly vulnerable development (including essential infrastructure)	Justification Test	Justification Test	Appropriate
Less vulnerable development	Justification Test	Appropriate	Appropriate
Water-compatible development	Appropriate	Appropriate	Appropriate

Figure 11: Matrix of Vulnerability versus Flood Zone (Extract of Table 3.2 of FRM Guidelines)

5.3 STAGE 3 - DETAILED FLOOD RISK ASSESSMENT

Surface water runoff from the development will be attenuated to greenfield runoff rates (Q-bar) before discharging to the watercourse to the north of the site.

The proposed surface water drainage network has been designed in accordance with the Greater Dublin Strategic Drainage Study (GDSDS). Surface water discharge rates from the proposed surface water drainage network will be controlled by a Hydrobrake type flow control device (or similar) and associated underground attenuation storage (attenuation tank and oversized pipe). Surface water will also pass through a specified separator (Class 1 Bypass separator or equivalent approved), placed before attenuation systems.

5.3.1 SuDS Methodologies

The following methodologies are being implemented as part of a SuDS treatment train approach:

- Attenuation of the 30 and 100-year return period storms within the attenuation tanks.
- Installation of a vortex flow control device (Hydrobrake or equivalent), limiting surface water discharge from the site to predevelopment runoff.
- Strategically designed and located swales in green areas
- Surface water discharge will also pass via a Class 1 full retention fuel / oil separator (sized in accordance with permitted discharge from the site and in accordance with IS EN 858).

5.3.2 Surface Water Attenuation Storage

Surface water runoff from the overall development lands will be attenuated to allowable greenfield runoff rate (Qbar). The rate of surface water runoff from the site will be restricted to greenfield runoff rates and the attenuation system sized accordingly.

5.3.3 Flood Exceedance

For storms greater than the 1% AEP, the development's drainage network design will be exceeded and areas with low ground levels may begin to flood. Generally, proposed road levels fall towards the site's southern boundary and overland flow is therefore directed towards the existing agricultural lands and ditches.

5.3.4 Impact on Adjacent Areas

The proposed development layout was designed to minimize the impact on adjacent areas. The development's storm-water drainage design attenuates discharges to green-field run-off rates in accordance with the GDSDS accepted design guidelines. Storms greater than the 1% AEP (exceeding the design capacity of the site's drainage system) may result in overland flow being directed toward the adjoining lands to the south.

5.3.5 Climate Change

The potential impact of climate change has been allowed for as follows:

- Pluvial flood risk - drainage system and attenuation storage design allow for increase in rainfall intensities, 30% allowance for climate change and 10% for urban creep.

5.3.6 Access and Egress for Emergency Services During Flood Events

Access and egress to the site is provided primarily by way of the proposed connection to Mungret Link Road located to the southeast of the site.

All of the estate roads will be located in Flood Zone C. It is expected that the proposed dwellings can be safely accessed during storm events up to 0.1% AEP event from the development road network.

5.3.7 Residual Risk

Remaining residual flood risks, following the detailed assessment include the following:

1. Pluvial flooding from the private drainage system related to a pipe blockage, flood exceedance or mechanical failure;
2. Pluvial flooding from the development's drainage system for storms in excess of the 1% AEP storm event

6.0 MITIGATION MEASURES

The proposed mitigation measures to address residual flood risks are summaries below.

Table 1: Proposed Flood Risk Mitigation Measures

M1	Proposed drainage system to be maintained on a regular basis to reduce the risk of a blockage.
M2	In the event of storms exceeding the 1% AEP design capacity of the attenuation system, possible overland flow routing towards open space areas should not be blocked. At these locations the site's boundaries should be permeable to facilitate flood routing onto adjacent public spaces
M3	Proposed residential development shall be set above the Flood Zone B (0.1% AEP) including an appropriate freeboard

6.1 EFFECTIVENESS OF MITIGATION MEASURE

It is considered that the flood risk mitigation measures if implemented are sufficient to provide a suitable level of protection to the proposed development. A regularly maintained drainage system will ensure that it remains effective and in good working order should a large pluvial storm occur.

Should extreme pluvial flooding occur that is in excess of the development's attenuation capacity (i.e., greater than 1% AEP), then overland flow routes directed towards open space areas are provided in order to protect the proposed development.

7.0 CONCLUSION

A flood risk assessment for the proposed residential development at Caheranardrish, Limerick, Co. Limerick has been undertaken in accordance with the methodology recommended in the FRM Guidelines.

The following is the summary of the flood risk assessment:

- The site including all proposed residential dwellings is located in Flood Zone C as defined by the requirements of “The Planning System and Flood Risk Management, Guidelines for Planning Authorities” and its Technical Appendices.
- Following the Flood Risk Assessment Stage 2 (Initial Flood Risk Assessment), it was determined that a Justification Test was not required.
- To prevent any potential of flooding within the vicinity from the proposed development, it is proposed to implement SuDS measures as discussed in the Infrastructure Report and Drainage Impact Assessment in order to limit the discharge from the site to that of the current greenfield discharge rates. The implementation of these SuDS measures will not increase the risk of flooding elsewhere. It is considered that the proposed development will have a negligible impact on the potential flood regime of the area.

In conclusion, the proposed development is considered to have the required level of flood protection up to and including the 1% AEP storm event.

Appendix A – Historical Flood Reports

Recurring Flooding at Mungret Village, Mungret, Co. Limerick

The information contained in this report has been extracted from a report submitted to The Office Of Public Works (OPW) by Limerick County Council.

- **Location and date of flood event:**

Location: Main Street, Mungret, Co Limerick
National Grid Reference:
Irish Grid Co-ordinates – 153,096 – 154,019

This flooding event is a recurring event.

- **Source and cause:**

The source of the floodwaters was ground and surface water (and the cause was prolonged rainfall).

- **Flood data:**

The following flood information was provided:

Flood Parameter	Max Value	Typical Value	Comments
Flood Level (metres OD Malin)			
Flood Depth (metres)			
Flood Flow (m ³ /s)			
Flood Velocity (m/s)			

Flooding has occurred at this location before – occasionally

- **Impacts of flooding event:**

It was recorded that this flooding event had the following impacts.

Impacts to property:

Residential – *Several Units at Risk*
Commercial – *Few units a risk*


Impacts to transport infrastructure:

Road – local access road flooded








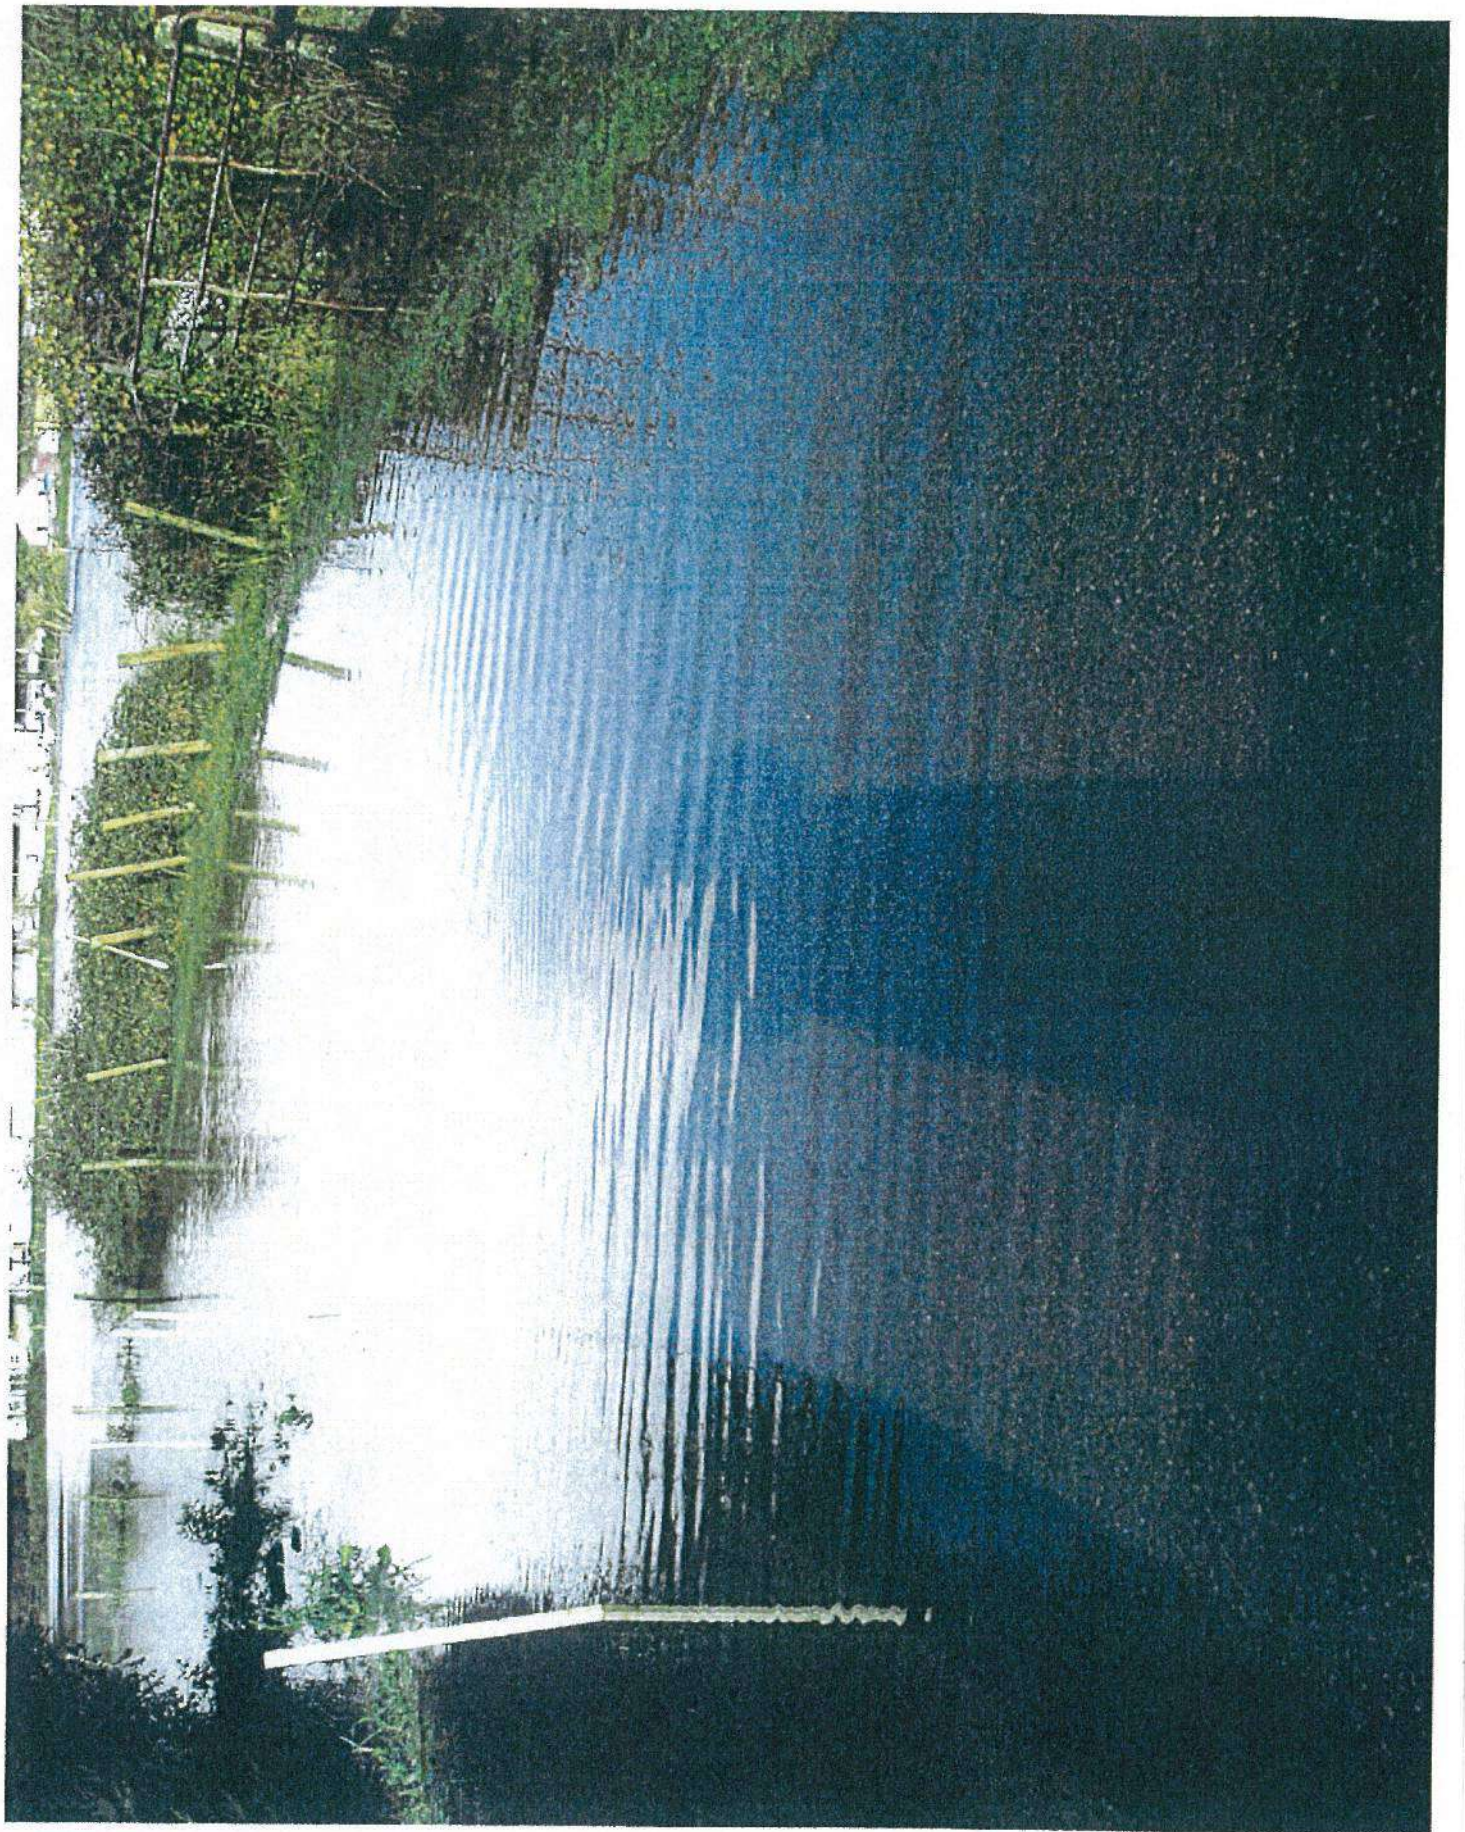







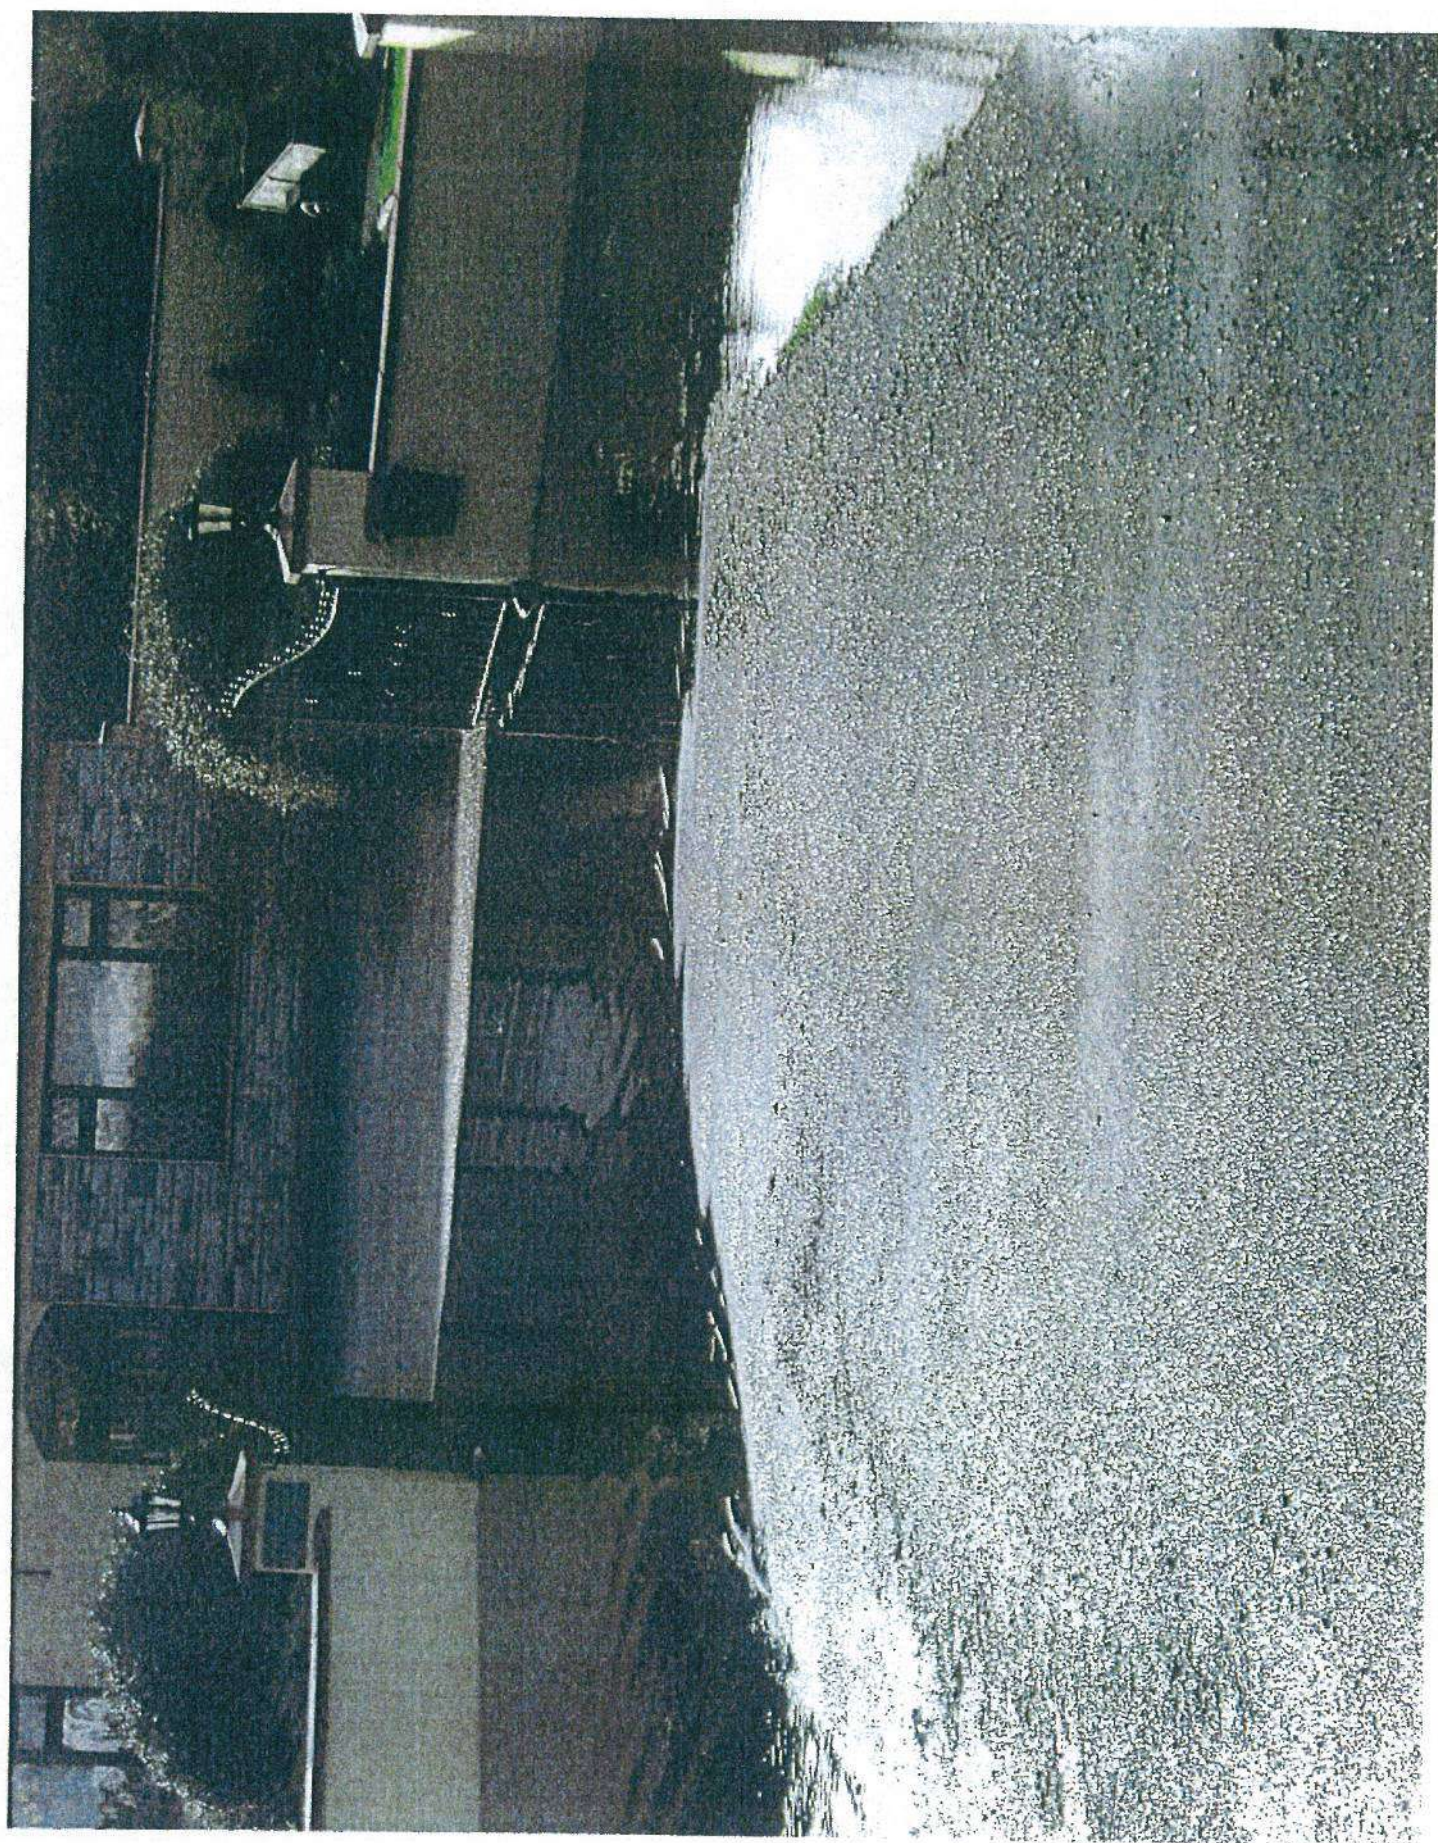






Report Produced: 27/9/2025 22:37

This Past Flood Event Summary Report summarises all past flood events within 2.5 kilometres of the map centre.

This report has been downloaded from www.floodinfo.ie (the "Website"). The users should take account of the restrictions and limitations relating to the content and use of the Website that are explained in the Terms and Conditions. It is a condition of use of the Website that you agree to be bound by the disclaimer and other terms and conditions set out on the Website and to the privacy policy on the Website.

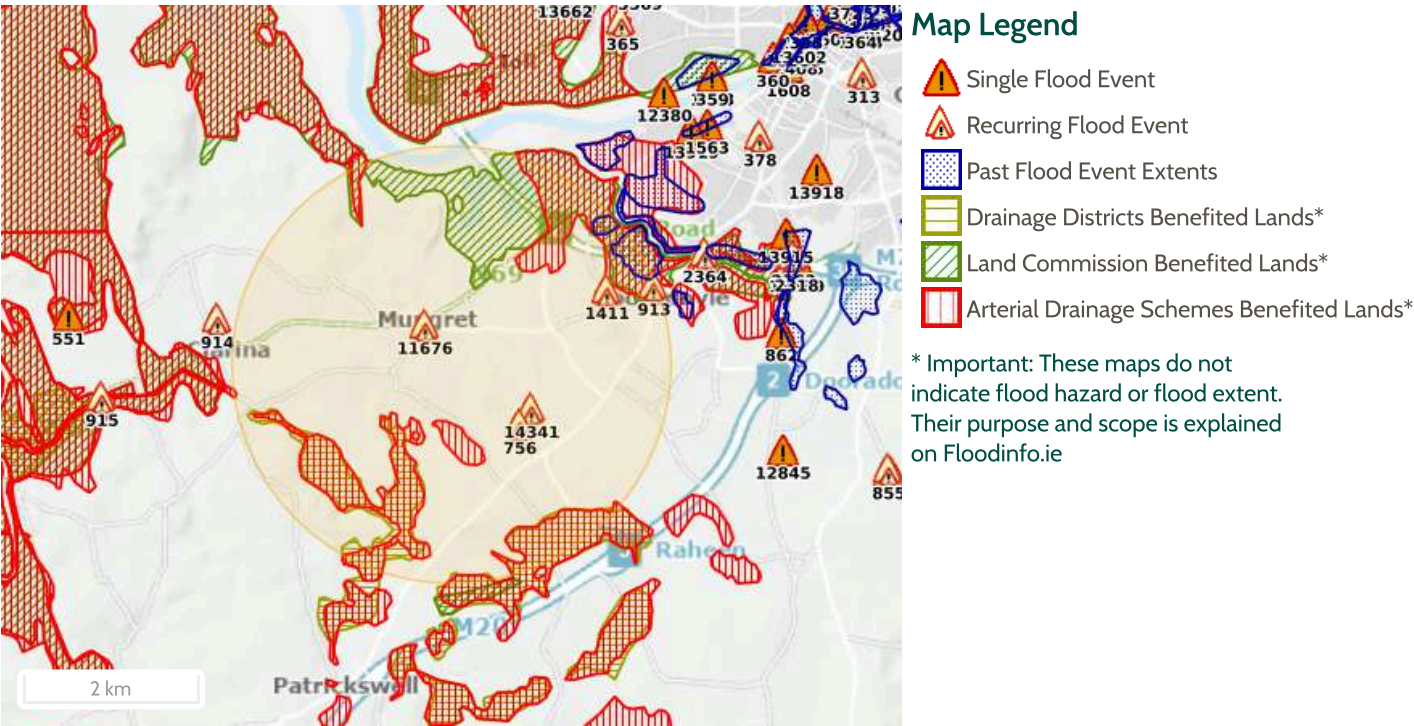

5 Results

Name (Flood_ID)		Start Date	Event Location
1.	Baunacloka-Loughmore Recurring (ID-14341) Additional Information: Reports (6) Press Archive (Q)	29/09/2023	Approximate Point
2.	Mungret Village, Co. Limerick (ID-11676) Additional Information: Reports (1) Press Archive (Q)	n/a	Approximate Point
3.	Raheen Dooradoyle, Limerick Feb 1990 (ID-541) Additional Information: Reports (1) Press Archive (Q)	01/02/1990	Area
4.	Turlough - Loughmore Common Limerick (ID-756) Additional Information: Reports (3) Press Archive (Q)	n/a	Approximate Point
5.	Dooradoyle Limerick recurring (ID-1411) Additional Information: Reports (1) Press Archive (Q)	n/a	Approximate Point

Appendix B – Flood Maps



Location Plan:

Legend:

- Nodes
- Model Reach
- AFA Boundary
- Flood Defence: Wall
- Flood Defence: Embankment
- Defended Area

10% AEP Coastal Flood Extent
 (1 in 10 chance in any given year)

0.5% AEP Coastal Flood Extent
 (1 in 200 chance in any given year)

0.1% AEP Coastal Flood Extent
 (1 in 1000 chance in any given year)


IMPORTANT USER NOTE:
THE VIEWER OF THIS MAP SHOULD REFER TO THE DISCLAIMER, GUIDANCE NOTES AND CONDITIONS OF USE THAT ACCOMPANY THIS MAP.

The Office of Public Works
Jonathan Swift Street
Trim
Co. Meath
C15 NX36

Merrion House
Merrion Road
Dublin 4
D04 R2C5

Project:	SHANNON CFRAM STUDY		
Map Type:	EXTENT		
Source:	COASTAL - TIDAL		
Area:	LIMERICK		
Scenario:	EXISTING		
Drawn by:	EH	Date:	June 2016
Checked by:	KM	Date:	June 2016
Reviewed by:	MC	Date:	June 2016
Approved by:	PS	Date:	June 2016

Map No.:	S2526LIK_EXCCD_F1_63
Sheet: 63 of 65	Revision: 0
Map Scale: 1: 5000	Plot Scale: 1:1 @ A3

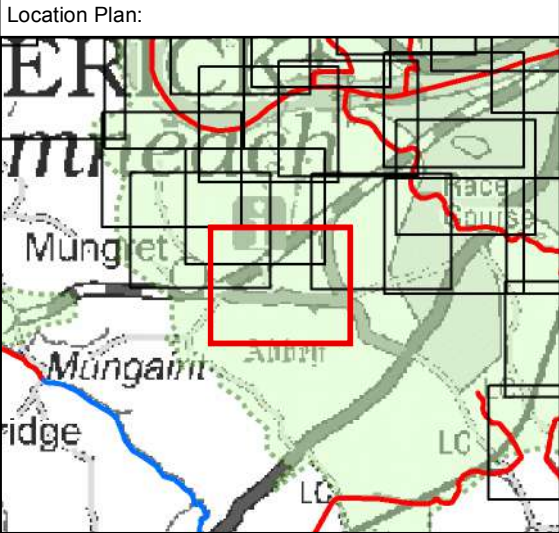

Legend:

- Nodes
- Model Reach
- AFA Boundary
- Flood Defence: Wall
- Flood Defence: Embankment
- Defended Area

10% AEP Fluvial Flood Extent
(1 in 10 chance in any given year)

1% AEP Fluvial Flood Extent
(1 in 100 chance in any given year)

0.1% AEP Fluvial Flood Extent
(1 in 1000 chance in any given year)

IMPORTANT USER NOTE:
THE VIEWER OF THIS MAP SHOULD REFER TO THE DISCLAIMER, GUIDANCE NOTES AND CONDITIONS OF USE THAT ACCOMPANY THIS MAP.



The Office of Public Works
Jonathan Swift Street
Trim
Co. Meath
C15 NX36



Merrion House
Merrion Road
Dublin 4
D04 R2C5

Project:	SHANNON CFRAM STUDY	
Map Type:	EXTENT	
Source:	FLUVIAL	
Area:	LIMERICK	
Scenario:	EXISTING	
Drawn by:	EH	Date: June 2016
Checked by:	KM	Date: June 2016
Reviewed by:	MC	Date: June 2016
Approved by:	PS	Date: June 2016
Map No.:	S2526LIK_EXFCD_F1_63	
Sheet:	63 of 65	Revision: 0
Map Scale:	1: 5000	Plot Scale: 1:1 @ A3

Appendix B –Surface Water Critical Storm by Return Period

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C2-1

Type : Catchment Area

Area (km²)	0.00041
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C2-2

Type : Catchment Area

Area (km²)	0.00041
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C2-3

Type : Catchment Area

Area (km²)	0.00094
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C2-4

Type : Catchment Area

Area (km²)	0.00087
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C2-5

Type : Catchment Area

Area (km²)	0.00197
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C2-6

Type : Catchment Area

Area (km²)	0.00069
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C2-7

Type : Catchment Area

Area (km²)	0.00225
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C1-1

Type : Catchment Area

Area (km²)	0.00173
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C1-2

Type : Catchment Area

Area (km²)	0.00079
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C1-3

Type : Catchment Area

Area (km²)	0.00164
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C1-4

Type : Catchment Area

Area (km²)	0.00029
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C1-5

Type : Catchment Area

Area (km²)	0.00173
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C1-6

Type : Catchment Area

Area (km²)	0.00144
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C1-7

Type : Catchment Area

Area (km²)	0.00098
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-1

Type : Catchment Area

Area (km²)	0.00114
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-2

Type : Catchment Area

Area (km²)	0.00088
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C3-3

Type : Catchment Area

Area (km²)	0.00077
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-4

Type : Catchment Area

Area (km²)	0.00138
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-5

Type : Catchment Area

Area (km²)	0.00103
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-6

Type : Catchment Area

Area (km²)	0.00241
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C3-7

Type : Catchment Area

Area (km²)	0.00105
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-8

Type : Catchment Area

Area (km²)	0.0006
------------	--------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-9

Type : Catchment Area

Area (km²)	0.00034
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-10

Type : Catchment Area

Area (km²)	0.00168
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C3-11

Type : Catchment Area

Area (km²)	0.00025
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C3-12

Type : Catchment Area

Area (km²)	0.00063
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-1

Type : Catchment Area

Area (km²)	0.00292
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-2

Type : Catchment Area

Area (km²)	0.00183
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C4-3

Type : Catchment Area

Area (km²)	0.00165
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-4

Type : Catchment Area

Area (km²)	0.00146
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-5

Type : Catchment Area

Area (km²)	0.00093
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-6

Type : Catchment Area

Area (km²)	0.00046
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C4-7

Type : Catchment Area

Area (km²)	0.00108
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-8

Type : Catchment Area

Area (km²)	0.00011
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-9

Type : Catchment Area

Area (km²)	0.00134
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-10

Type : Catchment Area

Area (km²)	0.00076
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C4-11

Type : Catchment Area

Area (km²)	0.00031
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-12

Type : Catchment Area

Area (km²)	0.00065
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-13

Type : Catchment Area

Area (km²)	0.00152
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-14

Type : Catchment Area

Area (km²)	0.00086
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C4-15

Type : Catchment Area

Area (km²)	0.00042
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-16

Type : Catchment Area

Area (km²)	0.00077
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-17

Type : Catchment Area

Area (km²)	0.00157
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C4-18

Type : Catchment Area

Area (km²)	0.00081
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C5-1

Type : Catchment Area

Area (km²)	0.0012
------------	--------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C5-2

Type : Catchment Area

Area (km²)	0.0011
------------	--------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C5-3

Type : Catchment Area

Area (km²)	0.0017
------------	--------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C5-4

Type : Catchment Area

Area (km²)	0.00033
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C5-5

Type : Catchment Area

Area (km²)	0.00224
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59



C5-6

Type : Catchment Area

Area (km²)	0.00119
------------	---------

Dynamic Sizing

Runoff Method	Time of Concentration
Summer Volumetric Runoff	0.750
Winter Volumetric Runoff	0.840
Time of Concentration (mins)	5
Percentage Impervious (%)	59

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

Name	Junction Type	Easting (m)	Northing (m)	Cover Elevation (m)	Depth (m)	Invert Elevation (m)	Chamber Shape	Diameter (m)
S2-6.2	Manhole	553211.508	653637.814	17.016	1.551	15.465	Circular	1.200
S2-6	Manhole	553201.627	653621.579	17.115	1.712	15.403	Circular	1.200
S2-7	Manhole	553194.226	653609.232	17.055	1.700	15.355	Circular	1.200
S3-6.1 Hydrobrake	Manhole	553222.998	653592.014	16.987	1.785	15.202	Circular	1.200
S3-6.2	Manhole	553228.496	653599.907	17.082	1.912	15.170	Circular	1.200
S3-6.3	Manhole	553255.202	653581.107	17.330	2.269	15.061	Circular	1.200
S3-6	Manhole	553275.331	653575.674	17.883	3.009	14.874	Circular	1.200
S4-2	Manhole	553434.005	653463.489	16.155	1.537	14.618	Circular	1.200
S4-7	Manhole	553352.319	653514.680	15.236	2.297	12.939	Circular	1.200
S3-11	Manhole	553217.859	653527.155	14.976	2.768	12.208	Circular	1.200
S5-1 Hydrobrake	Manhole	553210.914	653500.828	15.450	3.366	12.084	Circular	1.200
S5-2	Manhole	553200.605	653459.572	15.424	3.461	11.963	Circular	1.200
S5-3	Manhole	553206.769	653456.014	15.737	3.798	11.939	Circular	1.200
S5-4	Manhole	553201.841	653437.059	15.547	3.673	11.874	Circular	1.200
S5-5	Manhole	553196.494	653436.124	15.487	3.635	11.852	Circular	1.200
S5-6	Manhole	553191.508	653416.830	15.298	3.512	11.786	Circular	1.200
S5-7	Manhole	553184.977	653376.925	14.878	3.227	11.651	Circular	1.200
S2-5	Manhole	553207.200	653618.174	17.080	1.655	15.425	Circular	1.200
S2-4	Manhole	553214.156	653609.734	17.027	1.566	15.461	Circular	1.200
S2-3	Manhole	553221.467	653604.654	17.017	1.525	15.492	Circular	1.200
S2-2	Manhole	553248.367	653643.178	18.500	1.678	16.822	Circular	1.200
S2-1	Manhole	553268.622	653672.312	18.678	1.500	17.178	Circular	1.200
S1-3.1	Manhole	553313.335	653638.286	19.600	1.425	18.175	Circular	1.200
S1-3.2	Manhole	553339.650	653676.027	19.289	1.421	17.868	Circular	1.200
S1-2	Manhole	553347.275	653676.211	19.215	1.620	17.595	Circular	1.200
S1-1	Manhole	553378.004	653668.252	19.044	1.344	17.700	Circular	1.200
S1-4	Manhole	553314.485	653629.420	19.611	2.206	17.405	Circular	1.200
S1-5	Manhole	553329.204	653619.187	19.398	2.053	17.345	Circular	1.200
S1-5.1	Manhole	553382.877	653605.354	18.848	1.319	17.529	Circular	1.200
S3-1 Hydrobrake	Manhole	553325.087	653603.153	19.245	2.097	17.148	Circular	1.200
S3-2	Manhole	553300.434	653609.463	19.427	2.777	16.650	Circular	1.200
S3-3	Manhole	553287.279	653590.233	19.130	2.868	16.262	Circular	1.200
S3-3.2	Manhole	553282.349	653593.915	18.980	1.127	17.853	Circular	1.200
S3-3.1	Manhole	553303.153	653623.727	19.644	1.610	18.034	Circular	1.200
S1-3	Manhole	553344.679	653672.484	19.199	1.619	17.580	Circular	1.200
S5-7.1	Manhole	553227.778	653366.025	14.501	1.505	12.996	Circular	1.200
S5-4.1	Manhole	553243.215	653426.442	15.855	1.425	14.430	Circular	1.200
S3-12	Manhole	553329.151	653445.302	15.962	1.500	14.462	Circular	1.200
S3-13	Manhole	553282.870	653457.341	16.200	1.976	14.224	Circular	1.200
S3-14	Manhole	553227.489	653471.495	15.909	2.047	13.862	Circular	1.200
S3-15	Manhole	553234.624	653499.565	15.714	3.488	12.226	Circular	1.200
S3-7.3	Manhole	553296.375	653513.910	15.102	2.540	12.562	Circular	1.200
S3-7.2	Manhole	553330.958	653505.096	15.152	2.412	12.740	Circular	1.200
S3-7.1 Hydrobrake	Manhole	553333.244	653513.639	15.171	2.386	12.785	Circular	1.200
S4-9	Manhole	553323.369	653522.050	15.228	2.054	13.174	Circular	1.200
S4-8	Manhole	553331.210	653552.206	16.065	1.321	14.744	Circular	1.200
S4-7.1	Manhole	553341.601	653539.062	15.574	1.425	14.149	Circular	1.200
S4-5	Manhole	553345.045	653493.153	15.270	2.255	13.015	Circular	1.200
S4-6	Manhole	553350.945	653508.360	15.170	2.209	12.961	Circular	1.200
S4-4	Manhole	553354.733	653481.809	15.327	1.886	13.441	Circular	1.200
S4-3.2	Manhole	553337.086	653444.766	16.021	1.412	14.609	Circular	1.200
S4-4.1	Manhole	553331.992	653424.702	16.545	1.514	15.031	Circular	1.200
S4-3	Manhole	553391.283	653464.594	15.730	1.614	14.116	Circular	1.200
S4-1	Manhole	553476.943	653462.379	17.143	2.310	14.833	Circular	1.200
S2-6.1	Manhole	553209.931	653645.358	16.983	1.492	15.491	Circular	1.200
S3-4	Manhole	553282.444	653583.578	18.532	2.407	16.125	Circular	1.200

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



S3-5	Manhole	553280.144	653574.605	17.883	2.221	15.662	Circular	1.200
S3-7	Manhole	553271.955	653562.585	16.660	1.854	14.806	Circular	1.200
S4-7.2	Manhole	553356.684	653535.226	15.426	1.434	13.992	Circular	1.200
S3-8	Manhole	553261.802	653522.933	15.548	3.165	12.383	Circular	1.200
S3-9	Manhole	553250.583	653525.983	15.689	3.344	12.345	Circular	1.200
S3-10	Manhole	553232.956	653523.636	15.886	3.601	12.285	Circular	1.200
BP1	Manhole	553328.742	653617.215	19.346	2.108	17.238	Circular	1.200
BP2	Manhole	553196.518	653607.869	17.036	1.790	15.246	Circular	1.200
BP 4.2	Manhole	553325.234	653521.532	15.189	2.203	12.986	Circular	1.200
BP 4.1	Manhole	553345.134	653516.728	15.181	2.366	12.815	Circular	1.200
BP 3.2	Manhole	553226.048	653501.411	15.450	3.353	12.097	Circular	1.200
BP 3.1	Manhole	553218.403	653523.347	15.095	3.000	12.095	Circular	1.200
BP 5	Manhole	553185.297	653374.233	14.829	3.285	11.544	Circular	1.200

Name	Lock	Bend Loss
S2-6.2	All	0.00
S2-6	All	0.00
S2-7	All	0.00
S3-6.1 Hydrobrake	All	0.00
S3-6.2	All	0.00
S3-6.3	All	0.00
S3-6	All	0.00
S4-2	All	0.00
S4-7	All	0.00
S3-11	All	0.00
S5-1 Hydrobrake	All	0.00
S5-2	All	0.00
S5-3	All	0.00
S5-4	All	0.00
S5-5	All	0.00
S5-6	All	0.00
S5-7	All	0.00
S2-5	All	0.00
S2-4	All	0.00
S2-3	All	0.00
S2-2	All	0.00
S2-1	All	0.00
S1-3.1	All	0.00
S1-3.2	All	0.00
S1-2	All	0.00
S1-1	All	0.00
S1-4	All	0.00
S1-5	All	0.00
S1-5.1	All	0.00
S3-1 Hydrobrake	All	0.00
S3-2	All	0.00
S3-3	All	0.00
S3-3.2	All	0.00
S3-3.1	All	0.00
S1-3	All	0.00
S5-7.1	All	0.00
S5-4.1	All	0.00
S3-12	All	0.00
S3-13	All	0.00
S3-14	All	0.00
S3-15	All	0.00
S3-7.3	All	0.00
S3-7.2	All	0.00
S3-7.1 Hydrobrake	All	0.00
S4-9	All	0.00

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



S4-8	All	0.00
S4-7.1	All	0.00
S4-5	All	0.00
S4-6	All	0.00
S4-4	All	0.00
S4-3.2	All	0.00
S4-4.1	All	0.00
S4-3	All	0.00
S4-1	All	0.00
S2-6.1	All	0.00
S3-4	All	0.00
S3-5	All	0.00
S3-7	All	0.00
S4-7.2	All	0.00
S3-8	All	0.00
S3-9	All	0.00
S3-10	All	0.00
BP1	None	0.00
BP2	None	0.00
BP 4.2	None	0.00
BP 4.1	None	0.00
BP 3.2	None	0.00
BP 3.1	All	0.00
BP 5	All	0.00

Inlets

Junction	Inlet Name	Incoming Item(s)	Bypass Destination	Capacity Type
S2-6.2	Inlet	C2-4	(None)	No Restriction
	Inlet (1)	S2-2.000	(None)	No Restriction
S2-6	Inlet	S2-2.001	(None)	No Restriction
	Inlet (1)	S2-1.004	(None)	No Restriction
	Inlet (2)	C2-3	(None)	No Restriction
S2-7	Inlet	S2-1.005	(None)	No Restriction
S3-6.1 Hydrobrake	Inlet	S3-3.000	(None)	No Restriction
S3-6.2	Inlet	S3-3.001	(None)	No Restriction
		C4-9		
S3-6.3	Inlet	S3-3.002	(None)	No Restriction
	Inlet (1)	C4-10	(None)	No Restriction
S3-6	Inlet	S3-3.003	(None)	No Restriction
	Inlet (1)	S3-1.005	(None)	No Restriction
	Inlet (2)	C4-11	(None)	No Restriction
S4-2	Inlet	S4-1.000	(None)	No Restriction
	Inlet (1)	C3-2	(None)	No Restriction
S4-7	Inlet	S4-1.005	(None)	No Restriction
	Inlet (1)	S4-3.001	(None)	No Restriction
	Inlet (2)	C3-10	(None)	No Restriction
S3-11	Inlet	S3-1.010	(None)	No Restriction
	Inlet (1)	C4-16	(None)	No Restriction
S5-1 Hydrobrake	Inlet	S6-1.000A	(None)	No Restriction
S5-2	Inlet	S5-1.001	(None)	No Restriction
		C5-1		
S5-3	Inlet	S5-1.002	(None)	No Restriction
	Inlet (1)	C5-2	(None)	No Restriction
S5-4	Inlet	S5-1.003	(None)	No Restriction
		S6-2.000		
S5-5	Inlet	S5-1.004	(None)	No Restriction
	Inlet (1)	C5-4	(None)	No Restriction

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Junction	Inlet Name	Incoming Item(s)	Bypass Destination	Capacity Type
S5-6	Inlet	S5-1.005 C5-6	(None)	No Restriction
S5-7	Inlet	S5-1.006 S5-3.000	(None)	No Restriction
S2-5	Inlet	C2-2	(None)	No Restriction
	Inlet (1)	S2-1.003	(None)	No Restriction
S2-4	Inlet	C2-1	(None)	No Restriction
	Inlet (1)	S2-1.002	(None)	No Restriction
S2-3	Inlet (1)	S2-1.001	(None)	No Restriction
S2-2	Inlet	S2-1.000	(None)	No Restriction
	Inlet (1)	C2-5	(None)	No Restriction
S2-1	Inlet	C2-7	(None)	No Restriction
S1-3.1	Inlet (1)	C1-1	(None)	No Restriction
S1-3.2	Inlet	S1-2.000	(None)	No Restriction
	Inlet (1)	C1-4	(None)	No Restriction
S1-2	Inlet	C1-2	(None)	No Restriction
	Inlet (1)	S1-1.000	(None)	No Restriction
S1-1	Inlet (1)	C1-3	(None)	No Restriction
S1-4	Inlet	S1-1.002 C1-7	(None)	No Restriction
S1-5	Inlet	S1-1.003 S1-3.000	(None)	No Restriction
	Inlet (1)	C1-6	(None)	No Restriction
S1-5.1	Inlet	C1-5	(None)	No Restriction
S3-1 Hydrobrake	Inlet	S3-1.000	(None)	No Restriction
S3-2	Inlet	S3-1.001	(None)	No Restriction
	Inlet (1)	C4-7	(None)	No Restriction
S3-3	Inlet	S3-2.001	(None)	No Restriction
	Inlet (1)	S3-1.002	(None)	No Restriction
	Inlet (2)	C4-8	(None)	No Restriction
S3-3.2	Inlet	C4-6	(None)	No Restriction
	Inlet (1)	S3-2.000	(None)	No Restriction
S3-3.1	Inlet	C4-5	(None)	No Restriction
S1-3	Inlet	S1-1.001	(None)	No Restriction
	Inlet (1)	S1-2.001	(None)	No Restriction
S5-7.1	Inlet	C5-5	(None)	No Restriction
S5-4.1	Inlet	C5-3	(None)	No Restriction
S3-12	Inlet	C4-1	(None)	No Restriction
S3-13	Inlet	S3-5.000	(None)	No Restriction
	Inlet (1)	C4-2	(None)	No Restriction
S3-14	Inlet	S3-5.001	(None)	No Restriction
	Inlet (1)	C4-17	(None)	No Restriction
S3-15	Inlet	S5-5.002	(None)	No Restriction
	Inlet (1)	C4-18	(None)	No Restriction
S3-7.3	Inlet	S3-4.002	(None)	No Restriction
	Inlet (1)	C4-4	(None)	No Restriction
S3-7.2	Inlet	S3-4.001	(None)	No Restriction
	Inlet (1)	C4-3	(None)	No Restriction
S3-7.1 Hydrobrake	Inlet (1)	S5-1.000A	(None)	No Restriction
S4-9	Inlet	S4-4.000	(None)	No Restriction
	Inlet (1)	C3-7	(None)	No Restriction
S4-8	Inlet	C3-6	(None)	No Restriction
S4-7.1	Inlet	C3-8	(None)	No Restriction
S4-5	Inlet (2)	S4-1.003	(None)	No Restriction
S4-6	Inlet	C3-12	(None)	No Restriction
	Inlet (1)	S4-1.004	(None)	No Restriction

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Junction	Inlet Name	Incoming Item(s)	Bypass Destination	Capacity Type
S4-4	Inlet	S4-2.001 S4.1.002	(None)	No Restriction
	Inlet (1)	C3-11	(None)	No Restriction
S4-3.2	Inlet	S4-2.000	(None)	No Restriction
	Inlet (1)	C3-4	(None)	No Restriction
S4-4.1	Inlet	C3-3	(None)	No Restriction
S4-3	Inlet	S4-1.001	(None)	No Restriction
	Inlet (1)	C3-5	(None)	No Restriction
S4-1	Inlet	C3-1	(None)	No Restriction
S2-6.1	Inlet	C2-6	(None)	No Restriction
S3-4	Inlet	S3-1.003	(None)	No Restriction
S3-5	Inlet	S3-1.004 C4-12	(None)	No Restriction
	Inlet	S3-1.006	(None)	No Restriction
S3-7	Inlet	C4-13	(None)	No Restriction
	Inlet (1)	C4-13	(None)	No Restriction
S4-7.2	Inlet	S4-3.000 C3-9	(None)	No Restriction
	Inlet	S3-4.003 C4-14	(None)	No Restriction
S3-8	Inlet	S3-1.007	(None)	No Restriction
	Inlet (1)	S3-1.007	(None)	No Restriction
S3-9	Inlet	S3-1.008	(None)	No Restriction
S3-10	Inlet	S3-1.009	(None)	No Restriction
	Inlet (1)	C4-15	(None)	No Restriction
BP1	Inlet	S1-1.004	(None)	No Restriction
BP2	Inlet	S2-1.006	(None)	No Restriction
BP 4.2	Inlet	S4-4.001	(None)	No Restriction
BP 4.1	Inlet	S4-1.006	(None)	No Restriction
BP 3.2	Inlet	S3-5.003	(None)	No Restriction
BP 3.1	Inlet	S3-1.011	(None)	No Restriction
BP 5	Inlet	S5-1.007	(None)	No Restriction

Outlets

Junction	Outlet Name	Outgoing Connection	Outlet Type
S2-6.2	Outlet	S2-2.001	Free Discharge
S2-6	Outlet	S2-1.005	Free Discharge
S2-7	Outlet	S2-1.006	Free Discharge
	Outlet	S3-3.001	Hydro-Brake®

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Junction	Outlet Name	Outgoing Connection	Outlet Type
S3-6.1 Hydrobrake	Invert Elevation (m)	15.202	
	Design Depth (m)	1.000	
	Design Flow (L/s)	2.0	
	Objective	Minimize Upstream Storage Requirements	
	Application	Surface Water Only	
	Sump Available	☐	
	Unit Reference	CHE-0064-2000-1000-2000	
S3-6.2	Outlet	S3-3.002	Free Discharge
S3-6.3	Outlet	S3-3.003	Free Discharge
S3-6	Outlet	S3-1.006	Free Discharge
S4-2	Outlet	S4-1.001	Free Discharge
S4-7	Outlet	S4-1.006	Free Discharge
S3-11	Outlet	S3-1.011	Free Discharge
S5-1 Hydrobrake	Outlet	S5-1.001	Hydro-Brake®
	Invert Elevation (m)	12.084	
	Design Depth (m)	1.000	
	Design Flow (L/s)	6.0	
	Objective	Minimize Upstream Storage Requirements	
	Application	Surface Water Only	
	Sump Available	☐	
	Unit Reference	CHE-0110-6000-1000-6000	
S5-2	Outlet	S5-1.002	Free Discharge
S5-3	Outlet	S5-1.003	Free Discharge
S5-4	Outlet	S5-1.004	Free Discharge
S5-5	Outlet	S5-1.005	Free Discharge
S5-6	Outlet	S5-1.006	Free Discharge
S5-7	Outlet	S5-1.007	Free Discharge
S2-5	Outlet	S2-1.004	Free Discharge
S2-4	Outlet	S2-1.003	Free Discharge
S2-3	Outlet	S2-1.002	Free Discharge

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Junction	Outlet Name	Outgoing Connection	Outlet Type
S2-2	Outlet	S2-1.001	Free Discharge
S2-1	Outlet	S2-1.000	Free Discharge
S1-3.1	Outlet	S1-2.000	Free Discharge
S1-3.2	Outlet	S1-2.001	Free Discharge
S1-2	Outlet	S1-1.001	Free Discharge
S1-1	Outlet	S1-1.000	Free Discharge
S1-4	Outlet	S1-1.003	Free Discharge
S1-5	Outlet	S1-1.004	Free Discharge
S1-5.1	Outlet	S1-3.000	Free Discharge
S3-1 Hydrobrake	Outlet	S3-1.001	Hydro-Brake®
	Invert Elevation (m)	17.148	
	Design Depth (m)	1.000	
	Design Flow (L/s)	2.0	
	Objective	Minimize Upstream Storage Requirements	
	Application	Surface Water Only	
	Sump Available	☐	
	Unit Reference	CHE-0064-2000-1000-2000	
S3-2	Outlet	S3-1.002	Free Discharge
S3-3	Outlet	S3-1.003	Free Discharge
S3-3.2	Outlet	S3-2.001	Free Discharge
S3-3.1	Outlet	S3-2.000	Free Discharge
S1-3	Outlet	S1-1.002	Free Discharge
S5-7.1	Outlet	S5-3.000	Free Discharge
S5-4.1	Outlet	S6-2.000	Free Discharge
S3-12	Outlet	S3-5.000	Free Discharge
S3-13	Outlet	S3-5.001	Free Discharge
S3-14	Outlet	S5-5.002	Free Discharge
S3-15	Outlet	S3-5.003	Free Discharge
S3-7.3	Outlet	S3-4.003	Free Discharge
S3-7.2	Outlet	S3-4.002	Free Discharge
	Outlet	S3-4.001	Hydro-Brake®

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Junction	Outlet Name	Outgoing Connection	Outlet Type
S3-7.1 Hydrobrake	Invert Elevation (m)	12.785	
	Design Depth (m)	1.000	
	Design Flow (L/s)	8.0	
	Objective	Minimize Upstream Storage Requirements	
	Application	Surface Water Only	
	Sump Available	☐	
	Unit Reference	CHE-0125-8000-1000-8000	
S4-9	Outlet	S4-4.001	Free Discharge
S4-8	Outlet	S4-4.000	Free Discharge
S4-7.1	Outlet	S4-3.000	Free Discharge
S4-5	Outlet	S4-1.004	Free Discharge
S4-6	Outlet	S4-1.005	Free Discharge
S4-4	Outlet	S4-1.003	Free Discharge
S4-3.2	Outlet	S4-2.001	Free Discharge
S4-4.1	Outlet	S4-2.000	Free Discharge
S4-3	Outlet	S4-1.002	Free Discharge
S4-1	Outlet	S4-1.000	Free Discharge
S2-6.1	Outlet	S2-2.000	Free Discharge
S3-4	Outlet	S3-1.004	Free Discharge
S3-5	Outlet	S3-1.005	Free Discharge
S3-7	Outlet	S3-1.007	Free Discharge
S4-7.2	Outlet	S4-3.001	Free Discharge
S3-8	Outlet	S3-1.008	Free Discharge
S3-9	Outlet	S3-1.009	Free Discharge
S3-10	Outlet	S3-1.010	Free Discharge
BP1	Outlet	S1-1.00	Free Discharge
BP2	Outlet	S2-1.007	Free Discharge
BP 4.2	Outlet	S4-4.002	Free Discharge
BP 4.1	Outlet	S4-1.007	Free Discharge
BP 3.2	Outlet	S3-5.004	Free Discharge
BP 3.1	Outlet	Pipe	Free Discharge
BP 5	Outlet	S5-1.008	Free Discharge

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C2 - Attenuation Tank

Type : Cellular Storage

Dimensions

Exceedance Elevation (m)	16.987
Depth (m)	1.050
Base Elevation (m)	15.223
Number of Crates Long	22
Number of Crates Wide	18
Number of Crates High	3
Porosity (%)	96
Crate Length (m)	0.8
Crate Width (m)	0.8
Crate Height (m)	0.35
Total Volume (m³)	256.182

Inlets

Inlet (1)

Inlet Type	Point Inflow
Incoming Item(s)	S2-1.007
Bypass Destination	(None)
Capacity Type	No Restriction

Outlets

Outlet

Outgoing Connection	S3-3.000
Outlet Type	Free Discharge

Advanced

Base Infiltration Rate (m/hr)	0.0289
Side Infiltration Rate (m/hr)	0.0289
Safety Factor	2.0

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C1 - Attenuation Tank

Type : Cellular Storage

Dimensions

Exceedance Elevation (m)	19.281
Depth (m)	1.050
Base Elevation (m)	17.230
Number of Crates Long	30
Number of Crates Wide	14
Number of Crates High	3
Porosity (%)	98
Crate Length (m)	0.8
Crate Width (m)	0.8
Crate Height (m)	0.35
Total Volume (m³)	277.596

Inlets

Inlet (1)

Inlet Type	Point Inflow
Incoming Item(s)	S1-1.00
Bypass Destination	(None)
Capacity Type	No Restriction

Outlets

Outlet

Outgoing Connection	S3-1.000
Outlet Type	Free Discharge

Advanced

Base Infiltration Rate (m/hr)	0.029
Side Infiltration Rate (m/hr)	0.029
Safety Factor	2.0

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C3 - Attenuation Tank

Type : Cellular Storage

Dimensions

Exceedance Elevation (m)	15.412
Depth (m)	1.050
Base Elevation (m)	12.090
Number of Crates Long	27
Number of Crates Wide	27
Number of Crates High	3
Porosity (%)	96
Crate Length (m)	0.8
Crate Width (m)	0.8
Crate Height (m)	0.35
Total Volume (m³)	472.564

Inlets

Inlet (1)

Inlet Type	Point Inflow
Incoming Item(s)	S3-5.004
Bypass Destination	(None)
Capacity Type	No Restriction

Inlet (3)

Inlet Type	Point Inflow
Incoming Item(s)	Pipe
Bypass Destination	(None)
Capacity Type	No Restriction

Outlets

Outlet

Outgoing Connection	S6-1.000A
Outlet Type	Free Discharge

Advanced

Base Infiltration Rate (m/hr)	0.282
Side Infiltration Rate (m/hr)	0.282
Safety Factor	2.0

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C4 - Attenuation Tank

Type : Cellular Storage

Dimensions

Exceedance Elevation (m)	15.150
Depth (m)	1.050
Base Elevation (m)	12.800
Number of Crates Long	20
Number of Crates Wide	20
Number of Crates High	3
Porosity (%)	96
Crate Length (m)	0.8
Crate Width (m)	0.8
Crate Height (m)	0.35
Total Volume (m³)	259.348

Inlets

Inlet (2)

Inlet Type	Point Inflow
Incoming Item(s)	S4-4.002
Bypass Destination	(None)
Capacity Type	No Restriction

Inlet

Inlet Type	Point Inflow
Incoming Item(s)	S4-1.007
Bypass Destination	(None)
Capacity Type	No Restriction

Outlets

Outlet

Outgoing Connection	S5-1.000A
Outlet Type	Free Discharge

Advanced

Base Infiltration Rate (m/hr)	0.17
Side Infiltration Rate (m/hr)	0.17
Safety Factor	2.0

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



C5 - Attenuation Tank

Type : Cellular Storage

Dimensions

Exceedance Elevation (m)	14.550
Depth (m)	1.050
Base Elevation (m)	11.533
Number of Crates Long	25
Number of Crates Wide	20
Number of Crates High	3
Porosity (%)	96
Crate Length (m)	0.8
Crate Width (m)	0.8
Crate Height (m)	0.35
Total Volume (m³)	324.527

Inlets

Inlet (1)

Inlet Type	Point Inflow
Incoming Item(s)	S5-1.008
Bypass Destination	(None)
Capacity Type	No Restriction

Outlets

Advanced

Base Infiltration Rate (m/hr)	0.078
Side Infiltration Rate (m/hr)	0.078
Safety Factor	2.0

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Network Design Criteria Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Flow Options

Peak Flow Calculation	Rational Method
Min. Time of Entry (mins)	5
Max. Travel Time (mins)	30

Pipe Options

Lock Slope Options	None
Design Options	Minimize Excavation
Design Level	Level Crowns
Min. Cover Depth (m)	1.200
Min. Slope (1:x)	1000.00
Max. Slope (1:x)	40.00
Min. Velocity (m/s)	1.0
Max. Velocity (m/s)	3.0
Use Flow Restriction	☒
Reduce Channel Depths	☒

Pipe Size Library

Default

Add. Increment (mm)	75
Max. Diameter (mm)	0

Diameter (mm)	Min. Slope (1:x)	Max. Slope (1:x)
100	0.00	0.00
150	0.00	0.00

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Network Design Criteria Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Manhole Options

Apply Offset	☐
--------------	--------------------------

Manhole Size Library

Default

Diameter / Width

Connection (mm)	Diameter / Length (m)	Width (m)
0	1.200	0.000
375	1.350	0.000
500	1.500	0.000
750	1.800	0.000

Additional Sizing

Connection (mm)	900
Diameter / Length (m)	0.900
Width (m)	0.000

Depth

Depth (m)	Diameter / Length (m)	Width (m)
0.000	1.050	0.000
1.500	1.200	0.000

Access

Depth (m)	Ladder Protrusion (mm)
0.000	130
3.000	230

Benching Requirements

Landing Width (mm)	500
Benching Width (mm)	225

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Title: Rainfall Analysis Criteria	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



Runoff Type	Dynamic
Output Interval (mins)	5
Time Step	Default
Urban Creep	Apply Global Value
Urban Creep Global Value (%)	10
Junction Flood Risk Margin (mm)	300
Perform First Flush Analysis	☐

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



5 Yr: 5 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Inflow

Inflow	Storm Event	Inflow Area (km²)	Max. Inflow (L/s)	Total Inflow Volume (m³)
C2-1	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	6.4	2.960
C2-2	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	6.4	2.942
C2-3	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	14.7	6.768
C2-4	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	13.5	6.216
C2-5	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	30.6	14.121
C2-6	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	10.7	4.957
C2-7	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	35.0	16.160
C1-1	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	26.8	12.390
C1-2	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	12.3	5.658
C1-3	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	25.4	11.737
C1-4	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	4.5	2.087
C1-5	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	26.9	12.402
C1-6	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	22.4	10.354
C1-7	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	15.2	7.011
C3-1	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	17.7	8.153
C3-2	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	13.6	6.300
C3-3	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	12.0	5.538
C3-4	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	21.4	9.883
C3-5	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	15.9	7.365

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C3-6	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	37.4	17.284
C3-7	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	16.3	7.506
C3-8	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	9.3	4.297
C3-9	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	5.3	2.468
C3-10	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	26.1	12.027
C3-11	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	3.8	1.763
C3-12	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	9.7	4.489
C4-1	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	45.4	20.969
C4-2	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	28.5	13.164
C4-3	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	25.7	11.869
C4-4	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	22.6	10.438
C4-5	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	14.4	6.645
C4-6	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	7.2	3.322
C4-7	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	16.7	7.724
C4-8	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	1.8	0.819
C4-9	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	20.9	9.644
C4-10	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	11.8	5.434
C4-11	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	4.9	2.258
C4-12	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	10.1	4.663
C4-13	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	23.6	10.894
C4-14	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	13.4	6.165
C4-15	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	6.5	3.005
C4-16	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	12.0	5.547

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C4-17	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	24.4	11.242
C4-18	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	12.5	5.775
C5-1	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	18.7	8.615
C5-2	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	17.1	7.880
C5-3	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	26.4	12.186
C5-4	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	5.2	2.399
C5-5	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	34.9	16.091
C5-6	5 Yr: 5 years: +30 %: 15 mins: Winter	0.00	18.5	8.534

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



30 Yr: 30 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Inflow

Inflow	Storm Event	Inflow Area (km²)	Max. Inflow (L/s)	Total Inflow Volume (m³)
C2-1	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	9.5	4.367
C2-2	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	9.4	4.340
C2-3	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	21.6	9.993
C2-4	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	19.9	9.181
C2-5	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	45.1	20.854
C2-6	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	15.9	7.321
C2-7	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	51.7	23.859
C1-1	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	39.6	18.301
C1-2	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	18.1	8.359
C1-3	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	37.5	17.327
C1-4	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	6.7	3.074
C1-5	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	39.6	18.307
C1-6	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	33.1	15.290
C1-7	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	22.4	10.353

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C3-1	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	26.1	12.036
C3-2	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	20.1	9.304
C3-3	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	17.7	8.179
C3-4	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	31.6	14.588
C3-5	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	23.5	10.869
C3-6	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	55.2	25.517
C3-7	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	24.0	11.085
C3-8	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	13.7	6.340
C3-9	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	7.9	3.650
C3-10	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	38.5	17.758
C3-11	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	5.6	2.600
C3-12	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	14.4	6.631
C4-1	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	67.0	30.964
C4-2	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	42.1	19.438
C4-3	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	37.9	17.518
C4-4	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	33.4	15.419
C4-5	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	21.2	9.804

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C4-6	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	10.6	4.904
C4-7	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	24.7	11.403
C4-8	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	2.6	1.203
C4-9	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	30.8	14.240
C4-10	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	17.4	8.023
C4-11	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	7.2	3.338
C4-12	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	14.9	6.886
C4-13	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	34.8	16.079
C4-14	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	19.7	9.100
C4-15	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	9.6	4.439
C4-16	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	17.7	8.191
C4-17	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	35.9	16.601
C4-18	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	18.5	8.530
C5-1	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	27.5	12.717
C5-2	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	25.2	11.637
C5-3	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	39.0	17.998
C5-4	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	7.7	3.542

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C5-5	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	51.4	23.757
C5-6	30 Yr: 30 years: +30 %: 15 mins: Winter	0.00	27.3	12.603

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



100 Yr: 100 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Inflow

Inflow	Storm Event	Inflow Area (km²)	Max. Inflow (L/s)	Total Inflow Volume (m³)
C2-1	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	12.3	5.673
C2-2	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	12.2	5.643
C2-3	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	28.1	12.989
C2-4	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	25.8	11.927
C2-5	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	58.7	27.088
C2-6	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	20.6	9.512
C2-7	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	67.1	31.005
C1-1	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	51.5	23.776
C1-2	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	23.5	10.856
C1-3	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	48.7	22.510
C1-4	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	8.7	3.996
C1-5	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	51.5	23.791
C1-6	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	43.0	19.867
C1-7	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	29.1	13.454

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026		
		Designed by:	Checked by:	
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		RP	BJM	
		Approved By: OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		

C3-1	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	33.9	15.644
C3-2	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	26.2	12.086
C3-3	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	23.0	10.628
C3-4	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	41.1	18.958
C3-5	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	30.6	14.123
C3-6	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	71.8	33.156
C3-7	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	31.2	14.402
C3-8	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	17.8	8.240
C3-9	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	10.3	4.737
C3-10	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	50.0	23.077
C3-11	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	7.3	3.378
C3-12	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	18.6	8.609
C4-1	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	87.1	40.232
C4-2	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	54.7	25.261
C4-3	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	49.3	22.765
C4-4	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	43.4	20.035
C4-5	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	27.6	12.740

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C4-6	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	13.8	6.374
C4-7	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	32.1	14.816
C4-8	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	3.4	1.566
C4-9	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	40.1	18.499
C4-10	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	22.6	10.424
C4-11	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	9.4	4.335
C4-12	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	19.4	8.945
C4-13	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	45.2	20.893
C4-14	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	25.6	11.825
C4-15	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	12.5	5.765
C4-16	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	23.0	10.643
C4-17	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	46.7	21.568
C4-18	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	24.0	11.084
C5-1	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	35.8	16.523
C5-2	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	32.7	15.122
C5-3	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	50.6	23.386
C5-4	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	10.0	4.599

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM		Approved By: DB
Report Details: Type: Inflows Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

C5-5	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	66.8	30.870
C5-6	100 Yr: 100 years: +30 %: 15 mins: Winter	0.00	35.5	16.376

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



5 Yr: 5 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Depth

Junction	Storm Event	Cover Elevat ion (m)	Invert Elevat ion (m)	Max. Elevati on (m)	Max. Depth (m)	Max. Inflow (L/s)	Max. Resident Volume (m³)	Max. Flooded Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Status
S2-6.2	5 Yr: 5 years: +30 %: 15 mins: Winter	17.01 6	15.46 5	15.766	0.301	20.4	0.340	0.000	16.2	11.171	Surcharged
S2-6	5 Yr: 5 years: +30 %: 15 mins: Winter	17.11 5	15.40 3	15.759	0.356	90.8	0.403	0.000	88.1	53.969	Surcharged
S2-7	5 Yr: 5 years: +30 %: 480 mins: Winter	17.05 5	15.35 5	15.689	0.334	15.5	0.378	0.000	15.4	178.496	Surcharged
S3-6.1 Hydrobrake	5 Yr: 5 years: +30 %: 480 mins: Winter	16.98 7	15.20 2	15.689	0.487	1.8	0.551	0.000	1.7	61.390	Surcharged
S3-6.2	5 Yr: 5 years: +30 %: 15 mins: Winter	17.08 2	15.17 0	15.279	0.109	20.9	0.124	0.000	18.7	11.035	OK
S3-6.3	5 Yr: 5 years: +30 %: 15 mins: Winter	17.33 0	15.06 1	15.162	0.101	30.5	0.114	0.000	29.9	16.256	OK
S3-6	5 Yr: 5 years: +30 %: 15 mins: Winter	17.88 3	14.87 4	15.093	0.219	83.2	0.248	0.000	79.9	42.976	OK
S4-2	5 Yr: 5 years: +30 %: 15 mins: Winter	16.15 5	14.61 8	14.727	0.109	30.4	0.123	0.000	28.5	14.436	OK
S4-7	5 Yr: 5 years: +30 %: 15 mins: Winter	15.23 6	12.93 9	13.343	0.403	120.4	0.456	0.000	118.7	60.850	Surcharged
S3-11	5 Yr: 5 years: +30 %: 15 mins: Winter	14.97 6	12.20 8	12.585	0.377	148.9	0.427	0.000	145.9	95.495	OK
S5-1 Hydrobrake	5 Yr: 5 years: +30 %: 120 mins: Winter	15.45 0	12.08 4	12.504	0.420	6.1	0.475	0.000	6.0	50.669	Surcharged
S5-2	5 Yr: 5 years: +30 %: 15 mins: Winter	15.42 4	11.96 3	12.136	0.173	18.7	0.195	0.000	13.9	14.204	OK
S5-3	5 Yr: 5 years: +30 %: 15 mins: Winter	15.73 7	11.93 9	12.132	0.193	29.0	0.219	0.000	26.3	21.632	OK
S5-4	5 Yr: 5 years: +30 %: 15 mins: Winter	15.54 7	11.87 4	12.113	0.239	51.4	0.270	0.000	49.1	33.626	OK
S5-5	5 Yr: 5 years: +30 %: 15 mins: Winter	15.48 7	11.85 2	12.086	0.234	54.3	0.265	0.000	51.8	35.840	OK
S5-6	5 Yr: 5 years: +30 %: 600 mins: Winter	15.29 8	11.78 6	12.068	0.282	14.1	0.319	0.000	14.1	234.253	OK
S5-7	5 Yr: 5 years: +30 %: 600 mins: Winter	14.87 8	11.65 1	12.068	0.417	17.8	0.471	0.000	17.8	291.060	Surcharged
S2-5	5 Yr: 5 years: +30 %: 15 mins: Winter	17.08 0	15.42 5	15.793	0.368	62.3	0.416	0.000	60.0	36.117	Surcharged
S2-4	5 Yr: 5 years: +30 %: 15 mins: Winter	17.02 7	15.46 1	15.832	0.371	58.9	0.420	0.000	56.0	33.195	Surcharged
S2-3	5 Yr: 5 years: +30 %: 15 mins: Winter	17.01 7	15.49 2	15.863	0.371	63.0	0.420	0.000	52.5	30.250	Surcharged
S2-2	5 Yr: 5 years: +30 %: 15 mins: Winter	18.50 0	16.82 2	16.931	0.109	64.6	0.123	0.000	63.0	30.278	OK
S2-1	5 Yr: 5 years: +30 %: 15 mins: Winter	18.67 8	17.17 8	17.289	0.111	35.0	0.125	0.000	34.0	16.161	OK
S1-3.1	5 Yr: 5 years: +30 %: 15 mins: Winter	19.60 0	18.17 5	18.299	0.124	26.8	0.141	0.000	25.6	12.389	OK
S1-3.2	5 Yr: 5 years: +30 %: 15 mins: Winter	19.28 9	17.86 8	17.951	0.083	30.1	0.094	0.000	30.1	14.467	OK
S1-2	5 Yr: 5 years: +30 %: 15 mins: Winter	19.21 5	17.59 5	17.806	0.211	33.9	0.238	0.000	29.7	17.379	OK
S1-1	5 Yr: 5 years: +30 %: 15 mins: Winter	19.04 4	17.70 0	17.837	0.137	25.4	0.155	0.000	21.6	11.748	OK
S1-4	5 Yr: 5 years: +30 %: 15 mins: Winter	19.61 1	17.40 5	17.738	0.333	66.8	0.377	0.000	64.2	38.605	Surcharged
S1-5	5 Yr: 5 years: +30 %: 480 mins: Winter	19.39 8	17.34 5	17.714	0.369	17.5	0.417	0.000	17.0	202.269	Surcharged
S1-5.1	5 Yr: 5 years: +30 %: 480 mins: Winter	18.84 8	17.52 9	17.714	0.185	3.6	0.209	0.000	3.6	41.056	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026							
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:					
				RP	BJM	DB					
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49							

S3-1 Hydrobrake	5 Yr: 5 years: +30 %: 480 mins: Winter	19.24 5	17.14 8	17.713	0.565	1.7	0.640	0.000	1.7	72.139	Surcharged
S3-2	5 Yr: 5 years: +30 %: 15 mins: Winter	19.42 7	16.65 0	16.716	0.066	18.2	0.074	0.000	17.7	9.234	OK
S3-3	5 Yr: 5 years: +30 %: 15 mins: Winter	19.13 0	16.26 2	16.375	0.113	40.2	0.128	0.000	39.1	19.960	OK
S3-3.2	5 Yr: 5 years: +30 %: 15 mins: Winter	18.98 0	17.85 3	17.891	0.038	20.9	0.043	0.000	20.7	9.961	OK
S3-3.1	5 Yr: 5 years: +30 %: 15 mins: Winter	19.64 4	18.03 4	18.130	0.096	14.4	0.108	0.000	13.7	6.639	OK
S1-3	5 Yr: 5 years: +30 %: 15 mins: Winter	19.19 9	17.58 0	17.798	0.218	59.8	0.247	0.000	51.6	31.861	OK
S5-7.1	5 Yr: 5 years: +30 %: 15 mins: Winter	14.50 1	12.99 6	13.121	0.125	34.9	0.141	0.000	32.6	16.083	OK
S5-4.1	5 Yr: 5 years: +30 %: 15 mins: Winter	15.85 5	14.43 0	14.516	0.086	26.4	0.098	0.000	25.1	12.182	OK
S3-12	5 Yr: 5 years: +30 %: 15 mins: Winter	15.96 2	14.46 2	14.617	0.155	45.4	0.175	0.000	43.4	20.984	OK
S3-13	5 Yr: 5 years: +30 %: 15 mins: Winter	16.20 0	14.22 4	14.417	0.193	72.0	0.218	0.000	66.4	34.092	OK
S3-14	5 Yr: 5 years: +30 %: 15 mins: Winter	15.90 9	13.86 2	13.972	0.110	90.7	0.124	0.000	88.5	45.341	OK
S3-15	5 Yr: 5 years: +30 %: 15 mins: Winter	15.71 4	12.22 6	12.558	0.332	101.0	0.376	0.000	96.9	50.429	Surcharged
S3-7.3	5 Yr: 5 years: +30 %: 15 mins: Winter	15.10 2	12.56 2	12.927	0.365	37.9	0.412	0.000	33.6	28.836	Surcharged
S3-7.2	5 Yr: 5 years: +30 %: 15 mins: Winter	15.15 2	12.74 0	12.957	0.217	25.7	0.245	0.000	17.5	19.453	OK
S3-7.1 Hydrobrake	5 Yr: 5 years: +30 %: 120 mins: Winter	15.17 1	12.78 5	13.260	0.475	8.1	0.537	0.000	8.0	66.386	Surcharged
S4-9	5 Yr: 5 years: +30 %: 15 mins: Winter	15.22 8	13.17 4	13.381	0.207	53.2	0.234	0.000	51.3	24.778	OK
S4-8	5 Yr: 5 years: +30 %: 15 mins: Winter	16.06 5	14.74 4	14.816	0.072	37.4	0.081	0.000	36.9	17.293	OK
S4-7.1	5 Yr: 5 years: +30 %: 15 mins: Winter	15.57 4	14.14 9	14.212	0.063	9.3	0.071	0.000	9.1	4.296	OK
S4-5	5 Yr: 5 years: +30 %: 15 mins: Winter	15.27 0	13.01 5	13.481	0.466	75.4	0.527	0.000	72.3	38.751	Surcharged
S4-6	5 Yr: 5 years: +30 %: 15 mins: Winter	15.17 0	12.96 1	13.400	0.439	82.0	0.497	0.000	80.2	42.851	Surcharged
S4-4	5 Yr: 5 years: +30 %: 15 mins: Winter	15.32 7	13.44 1	13.561	0.120	78.6	0.136	0.000	75.4	38.950	OK
S4-3.2	5 Yr: 5 years: +30 %: 15 mins: Winter	16.02 1	14.60 9	14.686	0.077	33.2	0.087	0.000	32.3	15.432	OK
S4-4.1	5 Yr: 5 years: +30 %: 15 mins: Winter	16.54 5	15.03 1	15.087	0.056	12.0	0.063	0.000	11.8	5.538	OK
S4-3	5 Yr: 5 years: +30 %: 15 mins: Winter	15.73 0	14.11 6	14.222	0.106	44.4	0.120	0.000	42.5	21.785	OK
S4-1	5 Yr: 5 years: +30 %: 15 mins: Winter	17.14 3	14.83 3	14.936	0.103	17.7	0.117	0.000	16.7	8.154	OK
S2-6.1	5 Yr: 5 years: +30 %: 15 mins: Winter	16.98 3	15.49 1	15.765	0.274	10.7	0.310	0.000	6.9	4.955	OK
S3-4	5 Yr: 5 years: +30 %: 15 mins: Winter	18.53 2	16.12 5	16.208	0.083	39.1	0.094	0.000	38.7	19.932	OK
S3-5	5 Yr: 5 years: +30 %: 15 mins: Winter	17.88 3	15.66 2	15.729	0.067	48.8	0.076	0.000	48.4	24.580	OK
S3-7	5 Yr: 5 years: +30 %: 15 mins: Winter	16.66 0	14.80 6	14.923	0.117	103.5	0.132	0.000	102.3	53.798	OK
S4-7.2	5 Yr: 5 years: +30 %: 15 mins: Winter	15.42 6	13.99 2	14.040	0.048	14.4	0.054	0.000	14.1	6.763	OK
S3-8	5 Yr: 5 years: +30 %: 15 mins: Winter	15.54 8	12.38 3	12.787	0.404	149.2	0.457	0.000	142.4	88.154	Surcharged
S3-9	5 Yr: 5 years: +30 %: 15 mins: Winter	15.68 9	12.34 5	12.722	0.377	142.4	0.426	0.000	136.9	87.858	OK
S3-10	5 Yr: 5 years: +30 %: 15 mins: Winter	15.88 6	12.28 5	12.649	0.364	143.4	0.412	0.000	136.9	90.558	OK
BP1	5 Yr: 5 years: +30 %: 480 mins: Winter	19.34 6	17.23 8	17.714	0.476	17.0	0.538	0.000	16.9	201.926	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM	Approved By: DB	
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

BP2	5 Yr: 5 years: +30 %: 480 mins: Winter	17.03 6	15.24 6	15.689	0.443	15.4	0.501	0.000	15.2	178.094	Surcharged
BP 4.2	5 Yr: 5 years: +30 %: 120 mins: Winter	15.18 9	12.98 6	13.260	0.274	18.2	0.310	0.000	18.2	53.256	OK
BP 4.1	5 Yr: 5 years: +30 %: 120 mins: Winter	15.18 1	12.81 5	13.261	0.446	44.6	0.504	0.000	44.1	133.559	Surcharged
BP 3.2	5 Yr: 5 years: +30 %: 120 mins: Winter	15.45 0	12.09 7	12.504	0.407	37.5	0.460	0.000	37.3	109.443	Surcharged
BP 3.1	5 Yr: 5 years: +30 %: 15 mins: Winter	15.09 5	12.09 5	12.524	0.429	145.9	0.485	0.000	144.4	95.163	Surcharged
BP 5	5 Yr: 5 years: +30 %: 600 mins: Winter	14.82 9	11.54 4	12.068	0.524	17.8	0.592	0.000	17.7	290.897	Surcharged

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



30 Yr: 30 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Depth

Junction	Storm Event	Cover Elevat ion (m)	Invert Elevat ion (m)	Max. Elevati on (m)	Max. Depth (m)	Max. Inflow (L/s)	Max. Resident Volume (m³)	Max. Flooded Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Status
S2-6.2	30 Yr: 30 years: +30 %: 15 mins: Winter	17.01 6	15.46 5	16.093	0.628	32.3	0.711	0.000	28.8	16.339	Surcharged
S2-6	30 Yr: 30 years: +30 %: 15 mins: Winter	17.11 5	15.40 3	16.076	0.673	148.9	0.762	0.000	145.6	78.686	Surcharged
S2-7	30 Yr: 30 years: +30 %: 600 mins: Winter	17.05 5	15.35 5	15.947	0.592	17.3	0.670	0.000	17.1	265.541	Surcharged
S3-6.1 Hydrobrake	30 Yr: 30 years: +30 %: 600 mins: Winter	16.98 7	15.20 2	15.947	0.745	1.8	0.842	0.000	1.7	94.883	Surcharged
S3-6.2	30 Yr: 30 years: +30 %: 15 mins: Winter	17.08 2	15.17 0	15.310	0.140	30.8	0.158	0.000	28.6	15.662	OK
S3-6.3	30 Yr: 30 years: +30 %: 15 mins: Winter	17.33 0	15.06 1	15.189	0.128	46.0	0.145	0.000	43.1	23.419	OK
S3-6	30 Yr: 30 years: +30 %: 15 mins: Winter	17.88 3	14.87 4	15.157	0.283	121.6	0.320	0.000	117.7	62.411	OK
S4-2	30 Yr: 30 years: +30 %: 15 mins: Winter	16.15 5	14.61 8	14.759	0.141	44.9	0.159	0.000	42.1	21.320	OK
S4-7	30 Yr: 30 years: +30 %: 180 mins: Winter	15.23 6	12.93 9	13.555	0.615	49.8	0.696	0.000	49.3	219.630	Surcharged
S3-11	30 Yr: 30 years: +30 %: 15 mins: Winter	14.97 6	12.20 8	12.804	0.596	225.8	0.674	0.000	222.6	131.565	Surcharged
S5-1 Hydrobrake	30 Yr: 30 years: +30 %: 180 mins: Winter	15.45 0	12.08 4	12.797	0.713	6.0	0.807	0.000	5.7	76.359	Surcharged
S5-2	30 Yr: 30 years: +30 %: 960 mins: Winter	15.42 4	11.96 3	12.308	0.345	8.1	0.390	0.000	8.1	180.006	Surcharged
S5-3	30 Yr: 30 years: +30 %: 960 mins: Winter	15.73 7	11.93 9	12.307	0.368	10.0	0.417	0.000	10.0	223.091	Surcharged
S5-4	30 Yr: 30 years: +30 %: 960 mins: Winter	15.54 7	11.87 4	12.307	0.433	13.0	0.490	0.000	13.0	291.437	Surcharged
S5-5	30 Yr: 30 years: +30 %: 960 mins: Winter	15.48 7	11.85 2	12.307	0.455	13.6	0.515	0.000	13.6	304.516	Surcharged
S5-6	30 Yr: 30 years: +30 %: 960 mins: Winter	15.29 8	11.78 6	12.307	0.521	15.7	0.589	0.000	15.5	352.555	Surcharged
S5-7	30 Yr: 30 years: +30 %: 960 mins: Winter	14.87 8	11.65 1	12.307	0.656	19.5	0.741	0.000	19.2	443.384	Surcharged
S2-5	30 Yr: 30 years: +30 %: 15 mins: Winter	17.08 0	15.42 5	16.165	0.740	102.4	0.837	0.000	98.5	52.978	Surcharged
S2-4	30 Yr: 30 years: +30 %: 15 mins: Winter	17.02 7	15.46 1	16.267	0.806	97.5	0.912	0.000	93.0	48.892	Surcharged
S2-3	30 Yr: 30 years: +30 %: 15 mins: Winter	17.01 7	15.49 2	16.349	0.857	93.4	0.969	0.000	88.0	44.611	Surcharged
S2-2	30 Yr: 30 years: +30 %: 15 mins: Winter	18.50 0	16.82 2	16.960	0.138	95.5	0.156	0.000	93.4	44.660	OK
S2-1	30 Yr: 30 years: +30 %: 15 mins: Winter	18.67 8	17.17 8	17.317	0.139	51.7	0.158	0.000	50.3	23.860	OK
S1-3.1	30 Yr: 30 years: +30 %: 15 mins: Winter	19.60 0	18.17 5	18.331	0.156	39.6	0.177	0.000	40.1	18.235	OK
S1-3.2	30 Yr: 30 years: +30 %: 15 mins: Winter	19.28 9	17.86 8	18.131	0.263	46.7	0.297	0.000	28.2	21.367	Surcharged
S1-2	30 Yr: 30 years: +30 %: 15 mins: Winter	19.21 5	17.59 5	18.093	0.498	49.5	0.564	0.000	43.6	25.674	Surcharged
S1-1	30 Yr: 30 years: +30 %: 15 mins: Winter	19.04 4	17.70 0	18.101	0.401	37.5	0.453	0.000	31.4	17.354	Surcharged
S1-4	30 Yr: 30 years: +30 %: 600 mins: Winter	19.61 1	17.40 5	17.984	0.579	13.6	0.655	0.000	12.9	191.092	Surcharged
S1-5	30 Yr: 30 years: +30 %: 600 mins: Winter	19.39 8	17.34 5	17.984	0.639	20.3	0.723	0.000	19.7	300.740	Surcharged
S1-5.1	30 Yr: 30 years: +30 %: 600 mins: Winter	18.84 8	17.52 9	17.984	0.455	4.3	0.515	0.000	4.1	61.025	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026							
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:					
				RP	BJM	DB					
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49							

S3-1 Hydrobrake	30 Yr: 30 years: +30 %: 600 mins: Winter	19.24 5	17.14 8	17.984	0.836	1.8	0.945	0.000	1.8	107.505	Surcharged
S3-2	30 Yr: 30 years: +30 %: 15 mins: Winter	19.42 7	16.65 0	16.730	0.080	26.4	0.090	0.000	25.6	13.095	OK
S3-3	30 Yr: 30 years: +30 %: 15 mins: Winter	19.13 0	16.26 2	16.404	0.142	58.9	0.161	0.000	57.5	28.939	OK
S3-3.2	30 Yr: 30 years: +30 %: 15 mins: Winter	18.98 0	17.85 3	17.900	0.047	31.0	0.053	0.000	30.7	14.700	OK
S3-3.1	30 Yr: 30 years: +30 %: 15 mins: Winter	19.64 4	18.03 4	18.153	0.119	21.2	0.134	0.000	20.4	9.798	OK
S1-3	30 Yr: 30 years: +30 %: 15 mins: Winter	19.19 9	17.58 0	18.084	0.504	71.9	0.570	0.000	65.3	47.129	Surcharged
S5-7.1	30 Yr: 30 years: +30 %: 15 mins: Winter	14.50 1	12.99 6	13.161	0.165	51.4	0.186	0.000	48.0	23.747	OK
S5-4.1	30 Yr: 30 years: +30 %: 15 mins: Winter	15.85 5	14.43 0	14.539	0.109	39.0	0.123	0.000	37.2	17.993	OK
S3-12	30 Yr: 30 years: +30 %: 15 mins: Winter	15.96 2	14.46 2	14.663	0.201	67.0	0.228	0.000	64.2	30.974	OK
S3-13	30 Yr: 30 years: +30 %: 15 mins: Winter	16.20 0	14.22 4	14.483	0.259	106.3	0.292	0.000	97.5	50.354	OK
S3-14	30 Yr: 30 years: +30 %: 15 mins: Winter	15.90 9	13.86 2	13.998	0.136	133.5	0.154	0.000	131.0	66.972	OK
S3-15	30 Yr: 30 years: +30 %: 180 mins: Winter	15.71 4	12.22 6	12.798	0.572	41.8	0.647	0.000	40.7	179.422	Surcharged
S3-7.3	30 Yr: 30 years: +30 %: 15 mins: Winter	15.10 2	12.56 2	13.494	0.932	50.8	1.054	0.000	43.5	35.425	Surcharged
S3-7.2	30 Yr: 30 years: +30 %: 15 mins: Winter	15.15 2	12.74 0	13.532	0.792	37.9	0.896	0.000	25.5	22.860	Surcharged
S3-7.1 Hydrobrake	30 Yr: 30 years: +30 %: 180 mins: Winter	15.17 1	12.78 5	13.552	0.767	8.2	0.868	0.000	8.0	112.169	Surcharged
S4-9	30 Yr: 30 years: +30 %: 180 mins: Winter	15.22 8	13.17 4	13.553	0.379	20.2	0.428	0.000	20.2	87.663	Surcharged
S4-8	30 Yr: 30 years: +30 %: 15 mins: Winter	16.06 5	14.74 4	14.832	0.088	55.2	0.099	0.000	54.6	25.536	OK
S4-7.1	30 Yr: 30 years: +30 %: 15 mins: Winter	15.57 4	14.14 9	14.226	0.077	13.7	0.087	0.000	13.4	6.339	OK
S4-5	30 Yr: 30 years: +30 %: 15 mins: Winter	15.27 0	13.01 5	13.650	0.635	83.4	0.719	0.000	80.0	56.385	Surcharged
S4-6	30 Yr: 30 years: +30 %: 180 mins: Winter	15.17 0	12.96 1	13.555	0.594	34.9	0.672	0.000	34.5	153.633	Surcharged
S4-4	30 Yr: 30 years: +30 %: 15 mins: Winter	15.32 7	13.44 1	13.755	0.314	117.8	0.356	0.000	83.4	57.522	Surcharged
S4-3.2	30 Yr: 30 years: +30 %: 15 mins: Winter	16.02 1	14.60 9	14.703	0.094	49.0	0.107	0.000	48.3	22.744	OK
S4-4.1	30 Yr: 30 years: +30 %: 15 mins: Winter	16.54 5	15.03 1	15.100	0.069	17.7	0.078	0.000	17.4	8.178	OK
S4-3	30 Yr: 30 years: +30 %: 15 mins: Winter	15.73 0	14.11 6	14.244	0.128	65.7	0.145	0.000	63.8	32.123	OK
S4-1	30 Yr: 30 years: +30 %: 15 mins: Winter	17.14 3	14.83 3	14.965	0.132	26.1	0.149	0.000	24.8	12.036	OK
S2-6.1	30 Yr: 30 years: +30 %: 15 mins: Winter	16.98 3	15.49 1	16.096	0.605	15.9	0.684	0.000	12.4	7.290	Surcharged
S3-4	30 Yr: 30 years: +30 %: 15 mins: Winter	18.53 2	16.12 5	16.228	0.103	57.5	0.117	0.000	56.9	28.908	OK
S3-5	30 Yr: 30 years: +30 %: 15 mins: Winter	17.88 3	15.66 2	15.750	0.088	71.8	0.100	0.000	71.3	35.778	OK
S3-7	30 Yr: 30 years: +30 %: 15 mins: Winter	16.66 0	14.80 6	14.953	0.146	152.6	0.166	0.000	151.3	78.386	OK
S4-7.2	30 Yr: 30 years: +30 %: 15 mins: Winter	15.42 6	13.99 2	14.051	0.059	21.3	0.066	0.000	21.0	9.970	OK
S3-8	30 Yr: 30 years: +30 %: 15 mins: Winter	15.54 8	12.38 3	13.276	0.893	214.5	1.010	0.000	208.1	122.025	Surcharged
S3-9	30 Yr: 30 years: +30 %: 15 mins: Winter	15.68 9	12.34 5	13.137	0.792	208.1	0.895	0.000	202.9	121.377	Surcharged
S3-10	30 Yr: 30 years: +30 %: 15 mins: Winter	15.88 6	12.28 5	12.967	0.682	212.5	0.771	0.000	208.1	124.665	Surcharged
BP1	30 Yr: 30 years: +30 %: 600 mins: Winter	19.34 6	17.23 8	17.984	0.746	19.7	0.844	0.000	19.6	300.152	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM	Approved By: DB	
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

BP2	30 Yr: 30 years: +30 %: 600 mins: Winter	17.03 6	15.24 6	15.947	0.701	17.1	0.793	0.000	17.1	264.850	Surcharged
BP 4.2	30 Yr: 30 years: +30 %: 180 mins: Winter	15.18 9	12.98 6	13.553	0.566	20.2	0.641	0.000	19.9	87.627	Surcharged
BP 4.1	30 Yr: 30 years: +30 %: 180 mins: Winter	15.18 1	12.81 5	13.553	0.738	49.3	0.835	0.000	49.0	219.309	Surcharged
BP 3.2	30 Yr: 30 years: +30 %: 180 mins: Winter	15.45 0	12.09 7	12.798	0.701	40.7	0.792	0.000	40.3	178.808	Surcharged
BP 3.1	30 Yr: 30 years: +30 %: 180 mins: Winter	15.09 5	12.09 5	12.800	0.705	78.6	0.797	0.000	78.2	479.281	Surcharged
BP 5	30 Yr: 30 years: +30 %: 960 mins: Winter	14.82 9	11.54 4	12.306	0.762	19.2	0.862	0.000	19.1	443.011	Surcharged

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



100 Yr: 100 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Depth

Junction	Storm Event	Cover Elevat ion (m)	Invert Elevat ion (m)	Max. Elevati on (m)	Max. Depth (m)	Max. Inflow (L/s)	Max. Resident Volume (m³)	Max. Flooded Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Status
S2-6.2	100 Yr: 100 years: +30 %: 15 mins: Winter	17.01 6	15.46 5	16.377	0.912	43.1	1.031	0.000	39.7	20.821	Surcharged
S2-6	100 Yr: 100 years: +30 %: 15 mins: Winter	17.11 5	15.40 3	16.344	0.941	190.4	1.064	0.000	187.2	101.238	Surcharged
S2-7	100 Yr: 100 years: +30 %: 600 mins: Winter	17.05 5	15.35 5	16.191	0.836	22.5	0.945	0.000	22.4	330.142	Surcharged
S3-6.1 Hydrobrake	100 Yr: 100 years: +30 %: 600 mins: Winter	16.98 7	15.20 2	16.191	0.989	2.0	1.118	0.000	2.0	110.704	Surcharged
S3-6.2	100 Yr: 100 years: +30 %: 15 mins: Winter	17.08 2	15.17 0	15.333	0.163	40.1	0.185	0.000	38.4	20.008	OK
S3-6.3	100 Yr: 100 years: +30 %: 15 mins: Winter	17.33 0	15.06 1	15.290	0.229	60.9	0.259	0.000	45.5	30.070	OK
S3-6	100 Yr: 100 years: +30 %: 15 mins: Winter	17.88 3	14.87 4	15.258	0.384	147.8	0.434	0.000	146.8	80.412	Surcharged
S4-2	100 Yr: 100 years: +30 %: 15 mins: Winter	16.15 5	14.61 8	14.790	0.172	58.4	0.194	0.000	57.3	27.655	OK
S4-7	100 Yr: 100 years: +30 %: 180 mins: Winter	15.23 6	12.93 9	13.846	0.907	63.5	1.025	0.000	63.0	278.146	Surcharged
S3-11	100 Yr: 100 years: +30 %: 240 mins: Winter	14.97 6	12.20 8	13.092	0.884	79.8	1.000	0.000	79.3	671.399	Surcharged
S5-1 Hydrobrake	100 Yr: 100 years: +30 %: 240 mins: Winter	15.45 0	12.08 4	13.088	1.004	6.2	1.136	0.000	6.0	110.461	Surcharged
S5-2	100 Yr: 100 years: +30 %: 15 mins: Winter	15.42 4	11.96 3	12.705	0.742	35.8	0.839	0.000	32.2	21.888	Surcharged
S5-3	100 Yr: 100 years: +30 %: 15 mins: Winter	15.73 7	11.93 9	12.702	0.763	48.0	0.863	0.000	44.0	34.145	Surcharged
S5-4	100 Yr: 100 years: +30 %: 15 mins: Winter	15.54 7	11.87 4	12.667	0.793	88.8	0.897	0.000	82.7	57.177	Surcharged
S5-5	100 Yr: 100 years: +30 %: 15 mins: Winter	15.48 7	11.85 2	12.609	0.757	92.7	0.857	0.000	87.3	61.641	Surcharged
S5-6	100 Yr: 100 years: +30 %: 960 mins: Winter	15.29 8	11.78 6	12.570	0.784	17.8	0.887	0.000	17.4	461.910	Surcharged
S5-7	100 Yr: 100 years: +30 %: 960 mins: Winter	14.87 8	11.65 1	12.569	0.918	22.3	1.039	0.000	21.8	574.342	Surcharged
S2-5	100 Yr: 100 years: +30 %: 15 mins: Winter	17.08 0	15.42 5	16.471	1.046	125.4	1.183	0.000	122.7	68.411	Surcharged
S2-4	100 Yr: 100 years: +30 %: 15 mins: Winter	17.02 7	15.46 1	16.610	1.149	115.5	1.299	0.000	113.2	63.164	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026							
				Designed by:	Checked by:	Approved By:					
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)				RP	BJM	DB					
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49							

S2-3	100 Yr: 100 years: +30 %: 15 mins: Winter	17.01 7	15.49 2	16.712	1.220	105.2	1.380	0.000	103.2	57.586	Surcharged
S2-2	100 Yr: 100 years: +30 %: 15 mins: Winter	18.50 0	16.82 2	17.008	0.186	124.0	0.210	0.000	105.2	58.028	OK
S2-1	100 Yr: 100 years: +30 %: 15 mins: Winter	18.67 8	17.17 8	17.343	0.165	67.1	0.186	0.000	65.4	30.993	OK
S1-3.1	100 Yr: 100 years: +30 %: 15 mins: Winter	19.60 0	18.17 5	18.848	0.673	51.5	0.762	0.000	43.6	23.690	Surcharged
S1-3.2	100 Yr: 100 years: +30 %: 15 mins: Winter	19.28 9	17.86 8	18.562	0.694	52.3	0.785	0.000	45.2	27.767	Surcharged
S1-2	100 Yr: 100 years: +30 %: 15 mins: Winter	19.21 5	17.59 5	18.522	0.927	64.7	1.049	0.000	57.5	33.328	Surcharged
S1-1	100 Yr: 100 years: +30 %: 15 mins: Winter	19.04 4	17.70 0	18.579	0.879	48.7	0.994	0.000	41.2	22.549	Surcharged
S1-4	100 Yr: 100 years: +30 %: 600 mins: Winter	19.61 1	17.40 5	18.244	0.839	15.6	0.948	0.000	15.3	236.465	Surcharged
S1-5	100 Yr: 100 years: +30 %: 600 mins: Winter	19.39 8	17.34 5	18.244	0.899	24.9	1.016	0.000	24.8	373.480	Surcharged
S1-5.1	100 Yr: 100 years: +30 %: 600 mins: Winter	18.84 8	17.52 9	18.244	0.715	5.5	0.808	0.000	5.1	75.803	Surcharged
S3-1 Hydrobrake	100 Yr: 100 years: +30 %: 600 mins: Winter	19.24 5	17.14 8	18.243	1.095	2.1	1.239	0.000	2.1	122.494	Surcharged
S3-2	100 Yr: 100 years: +30 %: 15 mins: Winter	19.42 7	16.65 0	16.742	0.092	33.4	0.104	0.000	32.6	16.666	OK
S3-3	100 Yr: 100 years: +30 %: 15 mins: Winter	19.13 0	16.26 2	16.429	0.167	75.9	0.188	0.000	74.3	37.275	OK
S3-3.2	100 Yr: 100 years: +30 %: 15 mins: Winter	18.98 0	17.85 3	17.906	0.053	40.3	0.060	0.000	39.9	19.105	OK
S3-3.1	100 Yr: 100 years: +30 %: 15 mins: Winter	19.64 4	18.03 4	18.173	0.139	27.6	0.157	0.000	26.5	12.733	OK
S1-3	100 Yr: 100 years: +30 %: 15 mins: Winter	19.19 9	17.58 0	18.496	0.916	102.6	1.035	0.000	95.6	61.104	Surcharged
S5-7.1	100 Yr: 100 years: +30 %: 15 mins: Winter	14.50 1	12.99 6	13.213	0.217	66.8	0.245	0.000	60.5	30.856	OK
S5-4.1	100 Yr: 100 years: +30 %: 15 mins: Winter	15.85 5	14.43 0	14.559	0.129	50.6	0.145	0.000	48.4	23.380	OK
S3-12	100 Yr: 100 years: +30 %: 15 mins: Winter	15.96 2	14.46 2	14.823	0.361	87.1	0.408	0.000	72.2	40.230	Surcharged
S3-13	100 Yr: 100 years: +30 %: 15 mins: Winter	16.20 0	14.22 4	14.612	0.388	126.9	0.439	0.000	119.5	65.470	Surcharged
S3-14	100 Yr: 100 years: +30 %: 15 mins: Winter	15.90 9	13.86 2	14.018	0.156	166.2	0.177	0.000	164.1	86.986	OK
S3-15	100 Yr: 100 years: +30 %: 240 mins: Winter	15.71 4	12.22 6	13.089	0.863	43.8	0.976	0.000	43.1	249.051	Surcharged
S3-7.3	100 Yr: 100 years: +30 %: 15 mins: Winter	15.10 2	12.56 2	14.083	1.521	64.6	1.720	0.000	54.5	44.165	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026							
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:					
				RP	BJM	DB					
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49							

S3-7.2	100 Yr: 100 years: +30 %: 15 mins: Winter	15.15 2	12.74 0	14.136	1.396	49.3	1.578	0.000	28.6	28.670	Surcharged
S3-7.1 Hydrobrake	100 Yr: 100 years: +30 %: 180 mins: Winter	15.17 1	12.78 5	13.844	1.059	7.9	1.197	0.000	7.6	118.299	Surcharged
S4-9	100 Yr: 100 years: +30 %: 180 mins: Winter	15.22 8	13.17 4	13.845	0.671	26.0	0.759	0.000	24.6	112.034	Surcharged
S4-8	100 Yr: 100 years: +30 %: 15 mins: Winter	16.06 5	14.74 4	14.845	0.101	71.8	0.114	0.000	71.1	33.194	OK
S4-7.1	100 Yr: 100 years: +30 %: 15 mins: Winter	15.57 4	14.14 9	14.238	0.089	17.8	0.101	0.000	17.5	8.239	OK
S4-5	100 Yr: 100 years: +30 %: 15 mins: Winter	15.27 0	13.01 5	14.111	1.096	115.7	1.240	0.000	112.2	73.120	Surcharged
S4-6	100 Yr: 100 years: +30 %: 15 mins: Winter	15.17 0	12.96 1	13.932	0.971	130.9	1.098	0.000	128.5	80.379	Surcharged
S4-4	100 Yr: 100 years: +30 %: 15 mins: Winter	15.32 7	13.44 1	14.292	0.851	120.9	0.963	0.000	115.7	74.744	Surcharged
S4-3.2	100 Yr: 100 years: +30 %: 15 mins: Winter	16.02 1	14.60 9	14.718	0.109	63.7	0.124	0.000	62.7	29.501	OK
S4-4.1	100 Yr: 100 years: +30 %: 15 mins: Winter	16.54 5	15.03 1	15.111	0.080	23.0	0.091	0.000	22.6	10.626	OK
S4-3	100 Yr: 100 years: +30 %: 15 mins: Winter	15.73 0	14.11 6	14.378	0.262	87.9	0.296	0.000	50.9	41.729	OK
S4-1	100 Yr: 100 years: +30 %: 15 mins: Winter	17.14 3	14.83 3	14.991	0.158	33.9	0.179	0.000	32.2	15.642	OK
S2-6.1	100 Yr: 100 years: +30 %: 15 mins: Winter	16.98 3	15.49 1	16.381	0.890	20.6	1.007	0.000	17.2	9.333	Surcharged
S3-4	100 Yr: 100 years: +30 %: 15 mins: Winter	18.53 2	16.12 5	16.246	0.121	74.3	0.136	0.000	73.5	37.241	OK
S3-5	100 Yr: 100 years: +30 %: 15 mins: Summer	17.88 3	15.66 2	15.766	0.104	88.3	0.118	0.000	87.8	41.325	OK
S3-7	100 Yr: 100 years: +30 %: 15 mins: Winter	16.66 0	14.80 6	14.976	0.169	192.0	0.191	0.000	190.7	101.155	OK
S4-7.2	100 Yr: 100 years: +30 %: 15 mins: Winter	15.42 6	13.99 2	14.059	0.067	27.8	0.076	0.000	27.4	12.929	OK
S3-8	100 Yr: 100 years: +30 %: 15 mins: Winter	15.54 8	12.38 3	13.774	1.391	270.8	1.573	0.000	262.1	154.839	Surcharged
S3-9	100 Yr: 100 years: +30 %: 15 mins: Winter	15.68 9	12.34 5	13.562	1.217	262.1	1.377	0.000	254.8	153.332	Surcharged
S3-10	100 Yr: 100 years: +30 %: 15 mins: Winter	15.88 6	12.28 5	13.305	1.020	267.2	1.154	0.000	261.4	157.029	Surcharged
BP1	100 Yr: 100 years: +30 %: 600 mins: Winter	19.34 6	17.23 8	18.243	1.005	24.8	1.137	0.000	24.7	372.683	Surcharged
BP2	100 Yr: 100 years: +30 %: 600 mins: Winter	17.03 6	15.24 6	16.191	0.945	22.4	1.068	0.000	22.3	329.347	Surcharged
BP 4.2	100 Yr: 100 years: +30 %: 180 mins: Winter	15.18 9	12.98 6	13.844	0.858	24.6	0.970	0.000	24.2	111.423	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM	Approved By: DB	
Report Details: Type: Junctions Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

BP 4.1	100 Yr: 100 years: +30 %: 180 mins: Winter	15.18 1	12.81 5	13.845	1.030	63.0	1.165	0.000	62.6	277.267	Surcharged
BP 3.2	100 Yr: 100 years: +30 %: 240 mins: Winter	15.45 0	12.09 7	13.089	0.992	43.1	1.122	0.000	42.8	247.996	Surcharged
BP 3.1	100 Yr: 100 years: +30 %: 240 mins: Winter	15.09 5	12.09 5	13.091	0.996	79.3	1.127	0.000	79.0	670.613	Surcharged
BP 5	100 Yr: 100 years: +30 %: 960 mins: Winter	14.82 9	11.54 4	12.569	1.025	21.8	1.159	0.000	21.7	573.089	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49	



**5 Yr: 5 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max.
Avg. Depth**

Stormwater Control	Storm Event	Max. US Elevation (m)	Max. DS Elevation (m)	Max. US Depth (m)	Max. DS Depth (m)	Max. Inflow (L/s)	Max. Residual Volume (m³)	Max. Flooded Volume (m³)	Total Lost Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Percentage Available (%)	Status
C2 - Attenuation Tank	5 Yr: 5 years: +30 %: 480 mins: Winter	15.689	15.689	0.466	0.466	15.2	113.324	0.000	62.067	1.8	61.859	55.764	OK
C1 - Attenuation Tank	5 Yr: 5 years: +30 %: 480 mins: Winter	17.714	17.714	0.484	0.484	16.9	127.366	0.000	66.426	1.7	72.600	54.118	OK
C3 - Attenuation Tank	5 Yr: 5 years: +30 %: 120 mins: Winter	12.504	12.504	0.414	0.414	111.6	185.343	0.000	264.348	6.1	50.929	60.779	OK
C4 - Attenuation Tank	5 Yr: 5 years: +30 %: 120 mins: Winter	13.260	13.260	0.460	0.460	62.3	113.096	0.000	90.317	8.1	66.626	56.392	OK
C5 - Attenuation Tank	5 Yr: 5 years: +30 %: 600 mins: Winter	12.068	12.068	0.535	0.535	17.7	164.287	0.000	252.581	0.0	0.000	49.377	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49	



**30 Yr: 30 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max.
Avg. Depth**

Stormwater Control	Storm Event	Max. US Elevation (m)	Max. DS Elevation (m)	Max. US Depth (m)	Max. DS Depth (m)	Max. Inflow (L/s)	Max. Residual Volume (m³)	Max. Flooded Volume (m³)	Total Lost Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Percentage Available (%)	Status
C2 - Attenuation Tank	30 Yr: 30 years: +30 %: 600 mins: Winter	15.947	15.947	0.724	0.724	17.1	176.114	0.000	80.791	1.8	95.555	31.254	OK
C1 - Attenuation Tank	30 Yr: 30 years: +30 %: 600 mins: Winter	17.984	17.984	0.754	0.754	19.6	198.591	0.000	86.807	1.8	108.155	28.461	OK
C3 - Attenuation Tank	30 Yr: 30 years: +30 %: 180 mins: Winter	12.797	12.797	0.707	0.707	118.1	316.851	0.000	414.700	6.0	76.886	32.951	OK
C4 - Attenuation Tank	30 Yr: 30 years: +30 %: 180 mins: Winter	13.553	13.553	0.753	0.753	68.9	184.945	0.000	141.970	8.2	112.588	28.689	OK
C5 - Attenuation Tank	30 Yr: 30 years: +30 %: 960 mins: Winter	12.306	12.306	0.773	0.773	19.1	237.597	0.000	412.823	0.0	6.994	26.787	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Stormwater Controls Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



**100 Yr: 100 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By:
Max. Avg. Depth**

Stormwater Control	Storm Event	Max. US Elevation (m)	Max. DS Elevation (m)	Max. US Depth (m)	Max. DS Depth (m)	Max. Inflow (L/s)	Max. Residual Volume (m³)	Max. Flooded Volume (m³)	Total Lost Volume (m³)	Max. Outflow (L/s)	Total Discharge Volume (m³)	Percentage Available (%)	Status
C2 - Attenuation Tank	100 Yr: 100 years: +30 %: 600 mins: Winter	16.191	16.191	0.968	0.968	22.3	235.412	0.000	84.025	2.0	111.594	8.107	OK
C1 - Attenuation Tank	100 Yr: 100 years: +30 %: 600 mins: Winter	18.243	18.243	1.013	1.013	24.7	266.948	0.000	90.594	2.1	123.431	3.836	OK
C3 - Attenuation Tank	100 Yr: 100 years: +30 %: 240 mins: Winter	13.088	13.088	0.998	0.998	121.9	447.112	0.000	573.516	6.2	111.141	5.386	OK
C4 - Attenuation Tank	100 Yr: 100 years: +30 %: 180 mins: Winter	13.844	13.844	1.044	1.044	86.8	256.561	0.000	149.274	7.9	119.263	1.075	OK
C5 - Attenuation Tank	100 Yr: 100 years: +30 %: 960 mins: Winter	12.569	12.569	1.036	1.036	21.7	318.306	0.000	434.675	0.0	34.192	1.917	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



5 Yr: 5 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Flow

Connection	Storm Event	Connection Type	From	To	Upstream Cover Elevation (m)	Max. US Water Elevation (m)	Max. Flow Depth (m)	Discharge Volume (m³)	Max. Velocity (m/s)	Flow / Capacity	Max. Flow (L/s)	Status
S2-2.001	5 Yr: 5 years: +30 %: 15 mins: Summer	Pipe	S2-6.2	S2-6	17.016	15.731	0.293	9.972	0.3	0.23	16.4	OK
S2-1.005	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-6	S2-7	17.115	15.759	0.300	53.969	1.2	1.2	88.1	Surcharged
S2-1.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-1	S2-2	18.678	17.289	0.110	16.161	1.4	0.26	34.0	OK
S2-1.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-2	S2-3	18.500	16.931	0.240	30.278	1.1	0.29	63.0	OK
S2-1.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-3	S2-4	17.017	15.863	0.300	30.250	0.7	0.7	52.5	Surcharged
S2-1.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-4	S2-5	17.027	15.832	0.300	33.195	0.8	0.77	56.0	Surcharged
S2-1.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-5	S2-6	17.080	15.793	0.300	36.117	0.8	0.81	60.0	Surcharged
S3-3.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-6.1 Hydrobrake	S3-6.2	16.987	15.430	0.093	1.278	0.4	0.02	1.8	OK
S3-3.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-6.2	S3-6.3	17.082	15.279	0.105	10.914	0.8	0.25	18.7	OK
S3-3.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-6.3	S3-6	17.330	15.162	0.160	16.256	0.8	0.24	29.9	OK
S1-2.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-3.2	S1-3	19.289	17.951	0.151	14.467	1.1	0.23	30.1	OK
S1-1.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-1	S1-2	19.044	17.837	0.174	11.748	0.5	0.3	21.6	OK
S1-1.001	5 Yr: 5 years: +30 %: 15 mins: Summer	Pipe	S1-2	S1-3	19.215	17.795	0.201	15.515	0.6	0.41	30.0	OK
S1-1.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-4	S1-5	19.611	17.738	0.300	38.605	0.9	0.87	64.2	Surcharged
S1-2.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-3.1	S1-3.2	19.600	18.299	0.104	12.389	1.4	0.52	25.6	OK
S1-1.002	5 Yr: 5 years: +30 %: 15 mins: Summer	Pipe	S1-3	S1-4	19.199	17.782	0.254	28.421	0.8	0.72	53.1	OK
S1-3.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-5.1	S1-5	18.848	17.693	0.244	12.435	0.4	0.27	19.6	OK
S3-1.001	5 Yr: 5 years: +30 %: 960 mins: Winter	Pipe	S3-1 Hydrobrake	S3-2	19.245	17.697	0.024	127.368	0.9	0.02	1.7	Surcharged
S3-1.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-2	S3-3	19.427	16.716	0.089	9.234	1.0	0.11	17.7	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
				Designed by: RP	Checked by: BJM	Approved By: DB						
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S3-2.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-3.2	S3-3	18.980	17.891	0.076	9.961	1.8	0.07	20.7	OK
S3-1.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-3	S3-4	19.130	16.375	0.098	19.960	1.9	0.23	39.1	OK
S3-2.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-3.1	S3-3.2	19.644	18.130	0.067	6.639	1.4	0.32	13.7	OK
S3-1.006	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-6	S3-7	17.883	15.093	0.168	42.976	2.0	0.88	79.9	OK
S4-1.006	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-7	BP 4.1	15.236	13.343	0.300	60.850	1.7	1.62	118.7	Surcharged
S4-3.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-7.2	S4-7	15.426	14.040	0.225	6.763	0.4	0.1	14.1	OK
S4-2.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-4.1	S4-3.2	16.545	15.087	0.066	5.538	1.2	0.13	11.8	OK
S4-2.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-3.2	S4-4	16.021	14.686	0.099	15.432	1.6	0.15	32.3	OK
S4-1.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-1	S4-2	17.143	14.936	0.106	8.154	0.9	0.39	16.7	OK
S4.1.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-3	S4-4	15.730	14.222	0.113	21.785	1.7	0.25	42.5	OK
S4-3.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-7.1	S4-7.2	15.574	14.212	0.055	4.296	1.2	0.15	9.1	OK
S4-1.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-4	S4-5	15.327	13.561	0.293	38.950	1.1	0.34	75.4	OK
S4-1.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-5	S4-6	15.270	13.481	0.300	38.751	1.0	0.99	72.3	Surcharged
S4-4.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-8	S4-9	16.065	14.816	0.139	17.293	1.2	0.13	36.9	OK
S3-4.001	5 Yr: 5 years: +30 %: 120 mins: Summer	Pipe	S3-7.1 Hydrobrake	S3-7.2	15.171	13.196	0.086	59.770	0.8	0.19	8.0	Surcharged
S3-4.002	5 Yr: 5 years: +30 %: 30 mins: Winter	Pipe	S3-7.2	S3-7.3	15.152	12.919	0.225	32.326	0.8	0.48	20.4	OK
S3-1.008	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-8	S3-9	15.548	12.787	0.390	88.154	1.1	0.92	142.4	Surcharged
S3-4.003	5 Yr: 5 years: +30 %: 30 mins: Winter	Pipe	S3-7.3	S3-8	15.102	12.872	0.225	45.814	0.9	0.83	35.1	Surcharged
S3-5.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-12	S3-13	15.962	14.617	0.174	20.984	1.0	0.48	43.4	OK
S3-5.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-13	S3-14	16.200	14.417	0.151	34.092	1.9	0.65	66.4	OK
S5-5.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-14	S3-15	15.909	13.972	0.221	45.341	1.6	0.28	88.5	OK
S5-1.001	5 Yr: 5 years: +30 %: 360 mins: Winter	Pipe	S5-1 Hydrobrake	S5-2	15.450	12.473	0.069	77.791	0.6	0.09	6.0	Surcharged
S5-1.002	5 Yr: 5 years: +30 %: 30 mins: Winter	Pipe	S5-2	S5-3	15.424	12.121	0.166	25.330	0.6	0.22	16.0	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
				Designed by: RP	Checked by: BJM	Approved By: DB						
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S5-1.003	5 Yr: 5 years: +30 %: 30 mins: Winter	Pipe	S5-3	S5-4	15.737	12.114	0.197	35.621	0.6	0.37	27.1	OK
S6-2.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-4.1	S5-4	15.855	14.516	0.084	12.182	1.8	0.29	25.1	OK
S5-1.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-4	S5-5	15.547	12.113	0.236	33.626	0.8	0.6	49.1	OK
S5-1.005	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-5	S5-6	15.487	12.086	0.244	35.840	0.8	0.71	51.8	OK
S5-1.006	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-6	S5-7	15.298	12.040	0.258	44.047	1.0	0.89	65.2	OK
S5-3.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-7.1	S5-7	14.501	13.121	0.120	16.083	1.5	0.54	32.6	OK
S2-1.006	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S2-7	BP2	17.055	15.642	0.258	53.744	1.3	1.17	85.8	OK
S3-3.000	5 Yr: 5 years: +30 %: 60 mins: Winter	Pipe	C2 - Attenuat ion Tank	S3-6.1 Hydrobr ake	16.987	15.556	0.300	7.397	0.2	0.03	2.1	Surch arged
S1-1.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S1-5	BP1	19.398	17.669	0.285	60.502	1.5	1.37	100.8	Surch arged
S3-1.000	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	C1 - Attenuat ion Tank	S3-1 Hydrobr ake	19.281	17.445	0.256	2.010	0.1	0.01	2.1	OK
S3-1.011	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-11	BP 3.1	14.976	12.585	0.353	95.495	1.2	0.93	145.9	OK
S6-1.000A	5 Yr: 5 years: +30 %: 60 mins: Winter	Pipe	C3 - Attenuat ion Tank	S5-1 Hydrobr ake	15.412	12.477	0.375	25.274	0.2	0.05	6.3	Surch arged
S3-5.003	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-15	BP 3.2	15.714	12.558	0.287	50.429	1.4	1.32	96.9	Surch arged
S5-1.007	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S5-7	BP 5	14.878	11.913	0.242	59.779	1.2	0.7	95.1	OK
S4-1.005	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-6	S4-7	15.170	13.400	0.300	42.851	1.1	1.09	80.2	Surch arged
S5-1.000A	5 Yr: 5 years: +30 %: 120 mins: Summer	Pipe	C4 - Attenuat ion Tank	S3-7.1 Hydrobr ake	15.150	13.197	0.300	59.943	0.2	0.13	8.2	Surch arged
S4-4.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-9	BP 4.2	15.228	13.381	0.191	24.778	1.1	0.7	51.3	OK
S2-2.000	5 Yr: 5 years: +30 %: 15 mins: Summer	Pipe	S2-6.1	S2-6.2	16.983	15.732	0.253	4.425	0.3	0.1	7.7	OK
S3-1.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-4	S3-5	18.532	16.208	0.075	19.932	2.8	0.13	38.7	OK
S3-1.005	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-5	S3-6	17.883	15.729	0.143	24.580	1.5	0.09	48.4	OK
S4-1.001	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S4-2	S4-3	16.155	14.727	0.107	14.436	1.5	0.43	28.5	OK
S3-1.009	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-9	S3-10	15.689	12.722	0.370	87.858	1.1	0.87	136.9	OK
S3-1.010	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-10	S3-11	15.886	12.649	0.371	90.558	1.1	0.71	136.9	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM	Approved By: DB	
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

S3-1.007	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	S3-7	S3-8	16.660	14.923	0.260	53.798	1.6	0.32	102.3	OK
S1-1.00	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP1	C1 - Attenuati on Tank	19.346	17.503	0.211	60.059	2.6	1.39	102.0	OK
S2-1.007	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP2	C2 - Attenuati on Tank	17.036	15.488	0.196	53.356	2.3	1.14	83.5	OK
S4-4.002	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP 4.2	C4 - Attenuati on Tank	15.189	13.192	0.190	24.646	1.1	0.69	50.8	OK
S4-1.007	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP 4.1	C4 - Attenuati on Tank	15.181	13.195	0.300	60.294	1.7	1.6	117.6	Surch arged
S3-5.004	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP 3.2	C3 - Attenuati on Tank	15.450	12.406	0.275	50.088	1.4	1.31	96.1	Surch arged
Pipe	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP 3.1	C3 - Attenuati on Tank	15.095	12.524	0.300	95.163	2.0	2.59	144.4	Surch arged
S5-1.008	5 Yr: 5 years: +30 %: 15 mins: Winter	Pipe	BP 5	C5 - Attenuati on Tank	14.829	11.794	0.169	59.413	2.2	0.93	96.5	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



30 Yr: 30 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Flow

Connection	Storm Event	Connection Type	From	To	Upstream Cover Elevation (m)	Max. US Water Elevation (m)	Max. Flow Depth (m)	Discharge Volume (m³)	Max. Velocity (m/s)	Flow / Capacity	Max. Flow (L/s)	Status
S2-2.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-6.2	S2-6	17.016	16.093	0.300	16.228	0.4	0.4	28.8	Surcharged
S2-1.005	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-6	S2-7	17.115	16.076	0.300	78.302	2.1	1.98	145.6	Surcharged
S2-1.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-1	S2-2	18.678	17.317	0.139	23.860	1.6	0.39	50.3	OK
S2-1.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-2	S2-3	18.500	16.960	0.300	44.660	1.3	0.43	93.4	OK
S2-1.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-3	S2-4	17.017	16.349	0.300	44.538	1.2	1.17	88.0	Surcharged
S2-1.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-4	S2-5	17.027	16.267	0.300	48.718	1.3	1.27	93.0	Surcharged
S2-1.004	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-5	S2-6	17.080	16.165	0.300	52.758	1.4	1.33	98.5	Surcharged
S3-3.001	30 Yr: 30 years: +30 %: 600 mins: Winter	Pipe	S3-6.1 Hydrobrake	S3-6.2	16.987	15.947	0.041	94.851	0.4	0.02	1.7	Surcharged
S3-3.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-6.2	S3-6.3	17.082	15.310	0.134	15.487	0.9	0.39	28.6	OK
S3-3.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-6.3	S3-6	17.330	15.189	0.205	23.419	0.8	0.35	43.1	OK
S1-2.001	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	S1-3.2	S1-3	19.289	18.020	0.225	28.672	1.0	0.23	30.4	OK
S1-1.000	30 Yr: 30 years: +30 %: 15 mins: Summer	Pipe	S1-1	S1-2	19.044	18.086	0.300	15.495	0.5	0.51	37.1	Surcharged
S1-1.001	30 Yr: 30 years: +30 %: 15 mins: Summer	Pipe	S1-2	S1-3	19.215	18.034	0.300	22.916	0.7	0.67	49.2	Surcharged
S1-1.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S1-4	S1-5	19.611	17.904	0.300	56.131	1.2	1.16	85.1	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:						
				RP	BJM	DB						
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S1-2.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S1-3.1	S1-3.2	19.600	18.331	0.210	18.235	1.3	0.81	40.1	OK
S1-1.002	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	S1-3	S1-4	19.199	18.001	0.300	62.698	0.9	0.91	66.6	Surcharged
S1-3.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S1-5.1	S1-5	18.848	17.848	0.300	18.269	0.5	0.5	36.7	Surcharged
S3-1.001	30 Yr: 30 years: +30 %: 600 mins: Winter	Pipe	S3-1 Hydrobrake	S3-2	19.245	17.984	0.026	107.478	0.9	0.02	1.8	Surcharged
S3-1.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-2	S3-3	19.427	16.730	0.111	13.095	1.1	0.15	25.6	OK
S3-2.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-3.2	S3-3	18.980	17.900	0.094	14.700	1.9	0.1	30.7	OK
S3-1.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-3	S3-4	19.130	16.404	0.123	28.939	2.1	0.34	57.5	OK
S3-2.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-3.1	S3-3.2	19.644	18.153	0.083	9.798	1.5	0.48	20.4	OK
S3-1.006	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-6	S3-7	17.883	15.157	0.215	62.411	2.2	1.3	117.7	OK
S4-1.006	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-7	BP 4.1	15.236	13.474	0.300	87.997	2.1	2.04	149.8	Surcharged
S4-3.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-7.2	S4-7	15.426	14.051	0.225	9.970	0.5	0.15	21.0	OK
S4-2.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-4.1	S4-3.2	16.545	15.100	0.082	8.178	1.3	0.2	17.4	OK
S4-2.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-3.2	S4-4	16.021	14.703	0.204	22.744	1.2	0.22	48.3	OK
S4-1.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-1	S4-2	17.143	14.965	0.136	12.036	1.0	0.58	24.8	OK
S4.1.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-3	S4-4	15.730	14.244	0.221	32.123	1.3	0.38	63.8	OK
S4-3.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-7.1	S4-7.2	15.574	14.226	0.068	6.339	1.3	0.22	13.4	OK
S4-1.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-4	S4-5	15.327	13.755	0.300	57.522	1.2	0.38	83.4	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:						
				RP	BJM	DB						
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S4-1.004	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-5	S4-6	15.270	13.650	0.300	56.385	1.1	1.09	80.0	Surcharged
S4-4.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-8	S4-9	16.065	14.832	0.175	25.536	1.3	0.19	54.6	OK
S3-4.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-7.1 Hydrobrake	S3-7.2	15.171	13.264	0.225	2.993	0.7	0.25	10.8	Surcharged
S3-4.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-7.2	S3-7.3	15.152	13.532	0.225	20.332	0.7	0.6	25.5	Surcharged
S3-1.008	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-8	S3-9	15.548	13.276	0.400	122.025	1.7	1.34	208.1	Surcharged
S3-4.003	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	S3-7.3	S3-8	15.102	13.206	0.225	55.784	1.1	1.03	43.9	Surcharged
S3-5.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-12	S3-13	15.962	14.663	0.230	30.974	1.1	0.71	64.2	OK
S3-5.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-13	S3-14	16.200	14.483	0.197	50.354	2.0	0.95	97.5	OK
S5-5.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-14	S3-15	15.909	13.998	0.300	66.972	1.9	0.42	131.0	OK
S5-1.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-1 Hydrobrake	S5-2	15.450	12.482	0.251	3.161	0.5	0.17	11.5	Surcharged
S5-1.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-2	S5-3	15.424	12.291	0.300	15.676	0.5	0.37	27.7	Surcharged
S5-1.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-3	S5-4	15.737	12.291	0.300	27.184	0.6	0.54	39.3	Surcharged
S6-2.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-4.1	S5-4	15.855	14.539	0.105	17.993	2.0	0.43	37.2	OK
S5-1.004	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	S5-4	S5-5	15.547	12.255	0.300	66.947	0.9	0.75	60.7	Surcharged
S5-1.005	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	S5-5	S5-6	15.487	12.226	0.300	71.571	0.9	0.89	65.5	Surcharged
S5-1.006	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-6	S5-7	15.298	12.180	0.300	60.821	1.2	1.14	83.9	Surcharged
S5-3.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-7.1	S5-7	14.501	13.161	0.156	23.747	1.6	0.79	48.0	OK

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:						
				RP	BJM	DB						
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S2-1.006	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-7	BP2	17.055	15.782	0.300	77.684	2.0	1.96	144.4	Surcharged
S3-3.000	30 Yr: 30 years: +30 %: 30 mins: Winter	Pipe	C2 - Attenuat ion Tank	S3-6.1 Hydrobr ake	16.987	15.621	0.300	4.075	0.1	0.03	2.5	Surcharged
S1-1.004	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S1-5	BP1	19.398	17.783	0.300	87.563	2.2	2.08	152.8	Surcharged
S3-1.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	C1 - Attenuat ion Tank	S3-1 Hydrobr ake	19.281	17.547	0.300	2.324	0.6	0.01	2.6	Surcharged
S3-1.011	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-11	BP 3.1	14.976	12.804	0.400	131.565	1.8	1.42	222.6	Surcharged
S6-1.000A	30 Yr: 30 years: +30 %: 60 mins: Summer	Pipe	C3 - Attenuat ion Tank	S5-1 Hydrobr ake	15.412	12.625	0.375	23.660	0.2	0.05	6.4	Surcharged
S3-5.003	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-15	BP 3.2	15.714	12.729	0.300	73.744	2.1	1.99	146.4	Surcharged
S5-1.007	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S5-7	BP 5	14.878	11.966	0.288	83.658	1.3	0.97	130.5	OK
S4-1.005	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-6	S4-7	15.170	13.551	0.300	61.924	1.3	1.25	92.2	Surcharged
S5-1.000A	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	C4 - Attenuat ion Tank	S3-7.1 Hydrobr ake	15.150	13.264	0.300	3.790	0.2	0.13	8.6	Surcharged
S4-4.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-9	BP 4.2	15.228	13.437	0.239	36.330	1.3	1.04	76.2	OK
S2-2.000	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S2-6.1	S2-6.2	16.983	16.096	0.300	7.262	0.2	0.17	12.4	Surcharged
S3-1.004	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-4	S3-5	18.532	16.228	0.096	28.908	2.9	0.19	56.9	OK
S3-1.005	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-5	S3-6	17.883	15.750	0.186	35.778	1.6	0.14	71.3	OK
S4-1.001	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S4-2	S4-3	16.155	14.759	0.135	21.320	1.7	0.64	42.1	OK
S3-1.009	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-9	S3-10	15.689	13.137	0.400	121.377	1.6	1.29	202.9	Surcharged
S3-1.010	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-10	S3-11	15.886	12.967	0.400	124.665	1.7	1.08	208.1	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:						
				RP	BJM	DB						
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S3-1.007	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	S3-7	S3-8	16.660	14.953	0.300	78.386	2.1	0.47	151.3	OK
S1-1.00	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP1	C1 - Attenuati on Tank	19.346	17.576	0.300	87.137	3.2	2.13	156.1	Surch arged
S2-1.007	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP2	C2 - Attenuati on Tank	17.036	15.543	0.293	77.106	3.0	1.96	144.2	OK
S4-4.002	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP 4.2	C4 - Attenuati on Tank	15.189	13.264	0.281	35.939	1.3	1.03	75.5	OK
S4-1.007	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP 4.1	C4 - Attenuati on Tank	15.181	13.289	0.300	87.155	2.1	2.03	148.9	Surch arged
S3-5.004	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP 3.2	C3 - Attenuati on Tank	15.450	12.514	0.300	73.209	2.1	1.98	145.4	Surch arged
Pipe	30 Yr: 30 years: +30 %: 15 mins: Winter	Pipe	BP 3.1	C3 - Attenuati on Tank	15.095	12.702	0.300	131.004	3.1	3.95	220.4	Surch arged
S5-1.008	30 Yr: 30 years: +30 %: 15 mins: Summer	Pipe	BP 5	C5 - Attenuati on Tank	14.829	11.833	0.220	75.194	2.7	1.42	148.3	OK

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick	Date: 27/07/2026		
	Designed by: RP	Checked by: BJM	Approved By: DB
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)	OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49		



100 Yr: 100 years: Increase Rainfall (%): +30: Critical Storm Per Item: Rank By: Max. Flow

Connection	Storm Event	Connection Type	From	To	Upstream Cover Elevation (m)	Max. US Water Elevation (m)	Max. Flow Depth (m)	Discharge Volume (m³)	Max. Velocity (m/s)	Flow / Capacity	Max. Flow (L/s)	Status
S2-2.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-6.2	S2-6	17.016	16.377	0.300	20.593	0.6	0.55	39.7	Surcharged
S2-1.005	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-6	S2-7	17.115	16.344	0.300	99.813	2.6	2.55	187.2	Surcharged
S2-1.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-1	S2-2	18.678	17.343	0.175	30.993	1.5	0.5	65.4	OK
S2-1.001	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S2-2	S2-3	18.500	16.980	0.300	51.785	1.6	0.5	110.7	OK
S2-1.002	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S2-3	S2-4	17.017	16.667	0.300	51.413	1.5	1.42	106.7	Surcharged
S2-1.003	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S2-4	S2-5	17.027	16.556	0.300	56.128	1.6	1.56	113.9	Surcharged
S2-1.004	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-5	S2-6	17.080	16.471	0.300	67.512	1.7	1.66	122.7	Surcharged
S3-3.001	100 Yr: 100 years: +30 %: 600 mins: Winter	Pipe	S3-6.1 Hydrobrake	S3-6.2	16.987	16.191	0.045	110.669	0.4	0.03	2.0	Surcharged
S3-3.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-6.2	S3-6.3	17.082	15.333	0.196	19.623	0.8	0.52	38.4	OK
S3-3.003	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S3-6.3	S3-6	17.330	15.255	0.276	27.021	0.7	0.38	46.1	OK
S1-2.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-3.2	S1-3	19.289	18.562	0.225	27.767	1.1	0.34	45.2	Surcharged
S1-1.000	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S1-1	S1-2	19.044	18.433	0.300	20.139	0.6	0.57	41.5	Surcharged
S1-1.001	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S1-2	S1-3	19.215	18.409	0.300	29.786	0.8	0.79	57.9	Surcharged
S1-1.003	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-4	S1-5	19.611	18.143	0.300	71.747	1.7	1.64	120.9	Surcharged

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026								
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by:	Checked by:	Approved By:						
				RP	BJM	DB						
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49								

S1-2.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-3.1	S1-3.2	19.600	18.848	0.225	23.690	1.2	0.89	43.6	Surcharged
S1-1.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-3	S1-4	19.199	18.496	0.300	60.635	1.4	1.3	95.6	Surcharged
S1-3.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-5.1	S1-5	18.848	18.014	0.300	23.040	0.7	0.66	48.5	Surcharged
S3-1.001	100 Yr: 100 years: +30 %: 600 mins: Winter	Pipe	S3-1 Hydrobrake	S3-2	19.245	18.243	0.028	122.464	0.9	0.02	2.1	Surcharged
S3-1.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-2	S3-3	19.427	16.742	0.129	16.666	1.1	0.19	32.6	OK
S3-2.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-3.2	S3-3	18.980	17.906	0.110	19.105	2.1	0.13	39.9	OK
S3-1.003	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-3	S3-4	19.130	16.429	0.144	37.275	2.2	0.44	74.3	OK
S3-2.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-3.1	S3-3.2	19.644	18.173	0.096	12.733	1.6	0.63	26.5	OK
S3-1.006	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-6	S3-7	17.883	15.258	0.277	80.412	2.2	1.62	146.8	Surcharged
S4-1.006	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-7	BP 4.1	15.236	13.790	0.300	114.426	2.9	2.78	204.0	Surcharged
S4-3.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-7.2	S4-7	15.426	14.059	0.225	12.929	0.7	0.2	27.4	OK
S4-2.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-4.1	S4-3.2	16.545	15.111	0.095	10.626	1.4	0.26	22.6	OK
S4-2.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-3.2	S4-4	16.021	14.718	0.300	29.501	1.3	0.28	62.7	OK
S4-1.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-1	S4-2	17.143	14.991	0.165	15.642	1.0	0.76	32.2	OK
S4.1.002	100 Yr: 100 years: +30 %: 30 mins: Summer	Pipe	S4-3	S4-4	15.730	14.239	0.300	50.378	1.6	0.35	58.2	OK
S4-3.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-7.1	S4-7.2	15.574	14.238	0.078	8.239	1.4	0.29	17.5	OK
S4-1.003	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S4-4	S4-5	15.327	14.242	0.300	66.735	1.7	0.55	121.8	Surcharged

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)		Designed by: RP	Checked by: BJM		Approved By: DB
		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

S4-1.004	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S4-5	S4-6	15.270	14.054	0.300	65.285	1.6	1.58	115.8	Surcharged
S4-4.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-8	S4-9	16.065	14.845	0.211	33.194	1.3	0.24	71.1	OK
S3-4.001	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	S3-7.1 Hydrobrake	S3-7.2	15.171	13.346	0.225	2.278	0.7	0.28	12.1	Surcharged
S3-4.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-7.2	S3-7.3	15.152	14.136	0.225	24.516	0.7	0.67	28.6	Surcharged
S3-1.008	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-8	S3-9	15.548	13.774	0.400	154.839	2.1	1.69	262.1	Surcharged
S3-4.003	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-7.3	S3-8	15.102	14.083	0.225	44.165	1.4	1.28	54.5	Surcharged
S3-5.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-12	S3-13	15.962	14.823	0.300	40.230	1.0	0.8	72.2	Surcharged
S3-5.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-13	S3-14	16.200	14.612	0.272	65.470	1.9	1.17	119.5	Surcharged
S5-5.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-14	S3-15	15.909	14.018	0.300	86.986	2.3	0.53	164.1	OK
S5-1.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-1 Hydrobrake	S5-2	15.450	12.606	0.300	2.699	0.5	0.23	15.6	Surcharged
S5-1.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-2	S5-3	15.424	12.705	0.300	18.985	0.5	0.44	32.2	Surcharged
S5-1.003	100 Yr: 100 years: +30 %: 30 mins: Winter	Pipe	S5-3	S5-4	15.737	12.537	0.300	52.682	0.6	0.6	44.2	Surcharged
S6-2.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-4.1	S5-4	15.855	14.559	0.124	23.380	2.2	0.56	48.4	OK
S5-1.004	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-4	S5-5	15.547	12.667	0.300	57.177	1.2	1.02	82.7	Surcharged
S5-1.005	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-5	S5-6	15.487	12.609	0.300	61.641	1.2	1.19	87.3	Surcharged
S5-1.006	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-6	S5-7	15.298	12.473	0.300	77.530	1.7	1.62	118.9	Surcharged
S5-3.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-7.1	S5-7	14.501	13.213	0.198	30.856	1.6	1	60.5	OK

Project : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick				Date: 27/07/2026							
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)				Designed by: RP	Checked by: BJM	Approved By: DB					
				OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49							

S2-1.006	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-7	BP2	17.055	15.880	0.300	98.875	2.6	2.52	185.2	Surcharged
S3-3.000	100 Yr: 100 years: +30 %: 60 mins: Winter	Pipe	C2 - Attenuation Tank	S3-6.1 Hydrobrake	16.987	15.866	0.300	10.173	0.2	0.03	2.4	Surcharged
S1-1.004	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S1-5	BP1	19.398	17.907	0.300	111.575	3.0	2.86	210.2	Surcharged
S3-1.000	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	C1 - Attenuation Tank	S3-1 Hydrobrake	19.281	17.596	0.300	2.451	0.6	0.01	2.6	Surcharged
S3-1.011	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-11	BP 3.1	14.976	13.053	0.400	165.881	2.2	1.79	280.3	Surcharged
S6-1.000A	100 Yr: 100 years: +30 %: 180 mins: Winter	Pipe	C3 - Attenuation Tank	S5-1 Hydrobrake	15.412	13.083	0.375	86.651	0.2	0.05	7.1	Surcharged
S3-5.003	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-15	BP 3.2	15.714	12.930	0.300	95.777	2.6	2.51	184.6	Surcharged
S5-1.007	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S5-7	BP 5	14.878	12.036	0.345	106.860	1.5	1.31	177.4	OK
S4-1.005	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-6	S4-7	15.170	13.932	0.300	80.379	1.8	1.75	128.5	Surcharged
S5-1.000A	100 Yr: 100 years: +30 %: 180 mins: Summer	Pipe	C4 - Attenuation Tank	S3-7.1 Hydrobrake	15.150	13.696	0.300	112.520	0.2	0.13	8.3	Surcharged
S4-4.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-9	BP 4.2	15.228	13.495	0.283	46.425	1.4	1.36	99.7	Surcharged
S2-2.000	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S2-6.1	S2-6.2	16.983	16.381	0.300	9.280	0.2	0.23	17.2	Surcharged
S3-1.004	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-4	S3-5	18.532	16.246	0.111	37.241	3.1	0.25	73.5	OK
S3-1.005	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-5	S3-6	17.883	15.762	0.242	46.162	1.5	0.18	92.8	OK
S4-1.001	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S4-2	S4-3	16.155	14.790	0.217	27.655	1.5	0.87	57.3	OK
S3-1.009	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-9	S3-10	15.689	13.562	0.400	153.332	2.0	1.62	254.8	Surcharged
S3-1.010	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-10	S3-11	15.886	13.305	0.400	157.029	2.1	1.36	261.4	Surcharged

Project: : Large Scale Residential Development at Cahernanardish, Limerick, Co. Limerick		Date: 27/07/2026			
		Designed by: RP	Checked by: BJM	Approved By: DB	
Report Details: Type: Connections Summary Storm Phase: SW Design (FI Response)		OSL Butler: 38 Eastgate Drive Little Island Cork T45 YO49			

S3-1.007	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	S3-7	S3-8	16.660	14.976	0.300	101.155	2.7	0.6	190.7	OK
S1-1.00	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP1	C1 - Attenuation Tank	19.346	17.656	0.300	111.052	3.1	2.82	207.5	Surcharged
S2-1.007	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP2	C2 - Attenuation Tank	17.036	15.660	0.300	98.141	2.7	2.5	183.3	Surcharged
S4-4.002	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP 4.2	C4 - Attenuation Tank	15.189	13.416	0.300	45.815	1.4	1.35	98.8	Surcharged
S4-1.007	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP 4.1	C4 - Attenuation Tank	15.181	13.445	0.300	113.399	2.9	2.76	203.1	Surcharged
S3-5.004	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP 3.2	C3 - Attenuation Tank	15.450	12.606	0.300	95.094	2.6	2.5	183.3	Surcharged
Pipe	100 Yr: 100 years: +30 %: 15 mins: Winter	Pipe	BP 3.1	C3 - Attenuation Tank	15.095	12.888	0.300	165.115	3.9	4.96	277.1	Surcharged
S5-1.008	100 Yr: 100 years: +30 %: 15 mins: Summer	Pipe	BP 5	C5 - Attenuation Tank	14.829	11.881	0.286	95.434	2.7	1.75	182.1	OK

Appendix C – Site Infiltration Tests

Infiltration Test Summary

Hole #	Infiltration Rate (m/hr)			
	Test 1	Test 2	Test 3	Test 4
1	0.028974985			
2	0.255069234	0.289179124	0.302863767	
3	0.264415538	0.113982183	0.132116391	
4	0.095258986	0.062529459		

Hole #	Infiltration Rate (mm/hr)			
	Test 1	Test 2	Test 3	Average
1	28.975			28.975
2	255.069	289.179	302.864	282.371
3	264.416	113.982	132.116	170.171
4	95.259	62.529		78.894
				171.599

m/hr	m/s
0.02897499	8.04861E-06
0.28237071	7.84363E-05
0.17017137	4.72698E-05
0.07889422	2.19151E-05
0.17159885	4.76663E-05

Average Site Infiltration Rate 0.171598852 m/hr
171.5988518 mm/hr

Hole No 1

Excavation time: 8:20

Width	Length	Depth
1300	1800	1000

1.Fill (1m)

Depth Down	Time	T	Minutes
0	09:11	-	0
250	10:54	01:43	103
350	11:59	01:05	65
400	12:44	00:45	45
450	13:28	00:44	44
500	14:48	01:20	80
600			
750			

Theoretical

Soil Profile (Trial Pit Log)

0.00–0.20 m: Topsoil – Dark brown, soft, organic.

0.20–0.90 m: Silty sand – Light brown, soft, occasional gravel.

0.90–1.00 m: Limestone – Grey, weathered bedrock.

Y	X
Invert Depth	Time at Depth

75% =

0.25

102.7872

25% =

0.75

548.151

50%

0.5

378.198

Formula

0.25000023

0.74999955


0.50000032

Ap50

5 m2

2.Fill

N/A

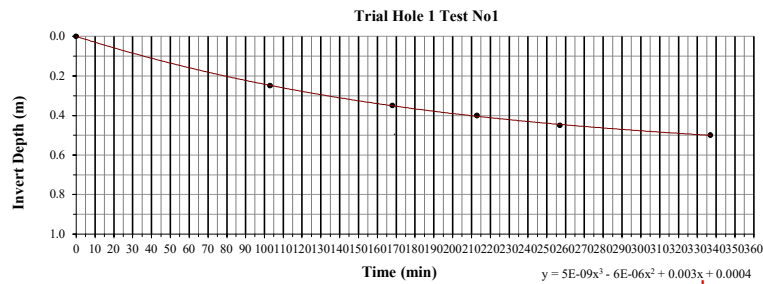

Time (min)	Invert (m)
0	0.000
103	0.250
168	0.350
213	0.400
257	0.450
337	0.500

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test

a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area

t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

8.05E-06 m/s

0.0000080486 m/s

28.97498511 mm/hr

0.028974985 m/hr

1.17 m³

5 m²

26721.83275 s

Hole No 2

Excavation time: 8:30


Width	Length	Depth
1300	1600	1200

1.Fill (1m)

Depth Down	Time	T	Minutes
0	09:15	-	0
250	09:31	00:16	16
400	09:45	00:14	14
550	09:59	00:14	14
750	10:15	00:16	16

Soil Profile (Trial Pit Log)
0.00–0.20 m: Topsoil – Dark brown, soft, organic.
0.20–1.2 m: Silty sand – Light brown, soft, occasional gravel.
1.2- ... : Limestone – Grey, weathered bedrock.

solver used		Formula
Y	X	
Invert Depth	Time at Depth	
75% =	0.3	21.69826
25% =	0.9	70.8226
50%	0.6	52.5013
Ap50	6 m2	

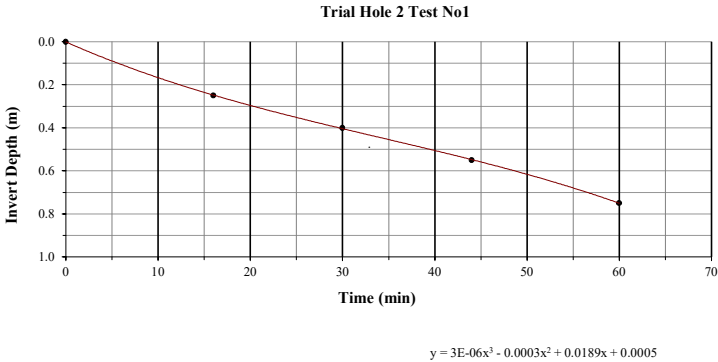

Time (min)	Invert (m)
0	0.000
16	0.250
30	0.400
44	0.550
60	0.750

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

7.09E-05 m/s

0.0000708526 m/s

255.0692335 mm/hr
0.255069234 m/hr

1.248 m ³
6 m ²
2947.463395 s

Hole No 2

Excavation time: 8:30

Width	Length	Depth
1300	1600	1200

2.Fill (1m)

Depth Down	Time	T	Minutes
0	11:47	-	0
250	12:10	00:23	23
300	12:15	00:05	5
580	12:41	00:26	26
750	13:00	00:19	19

Y
Invert Depth

75% = 0.3
25% = 0.7
50% = 0.4

Ap50 6 m2


solver used

X
Time at Depth

28.15473
71.4847
37.6431

Formula

0.299999958
0.700000131
0.400000008

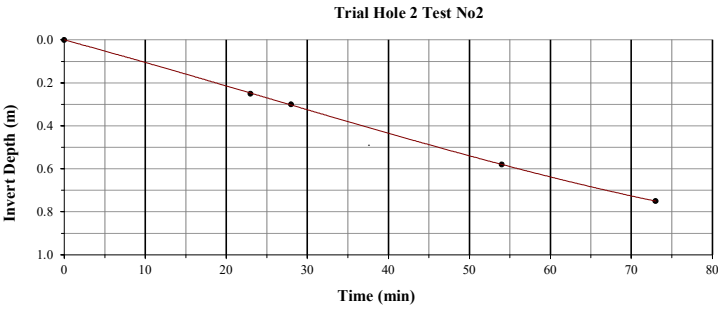

$$y = -5E-07x^3 + 3E-05x^2 + 0.0102x + 0.0002$$

Time (min)	Invert (m)
0	0.000
23	0.250
28	0.300
54	0.580
73	0.750

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

8.03E-05 m/s

0.0000803275 m/s

289.1791238 mm/hr
0.289179124 m/hr

Hole No 2


Excavation time: 8:30

Width	Length	Depth
1300	1600	1200

3.Fill (1m)

Depth Down	Time	T	Minutes
0	13:19	-	0
250	13:45	00:26	26
470	14:07	00:22	22
750	14:40	00:33	33

		solver used			Formula
Y	X				
Invert Depth	Time at Depth				
75% =	0.3	30.76299			0.299999864
25% =	0.7	72.1351			0.700000256
50%	0.4	40.5503			0.399999996
Ap50	6	m ²			

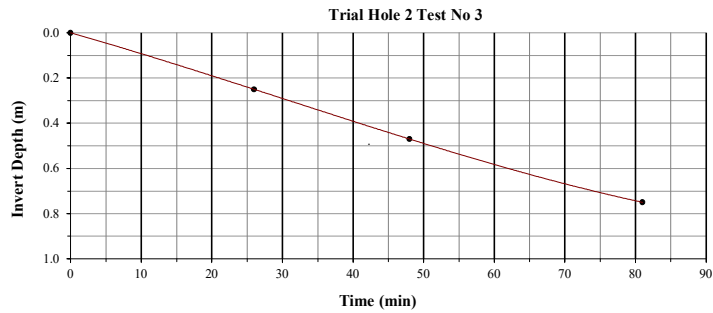

$$y = -4E-07x^3 + 4E-05x^2 + 0.0089x - 2E-14$$

Time (min)	Invert (m)
0	0.000
26	0.250
48	0.470
81	0.750

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

8.41E-05 m/s

0.0000841288 m/s

302.8637672 mm/hr

0.302863767 m/hr

Hole No 3

Excavation time: 8:40

Width	Length	Depth
1200	1600	1150

1.Fill (1m)

Depth Down	Time	T
0	09:17	-
250	09:38	00:21
450	10:00	00:22
650	10:26	00:26
750	10:45	00:19

Minutes
0
21
22
26
19

Soil Profile (Trial Pit Log)

0.00–0.20 m: Topsoil – Dark brown, soft, organic.

0.20–1.1 m: Silty sand – Light brown, soft, occasional gravel.

1.1- .. : Limestone – Grey, weathered bedrock.

Y solver used X
Invert Depth Time at Depth

75% = 0.2875 24.67033

25% = 0.8625 70.8226

50% = 0.575 52.5013


Ap50 5 m2

Formula

0.287500031

0.68170402

0.545427292

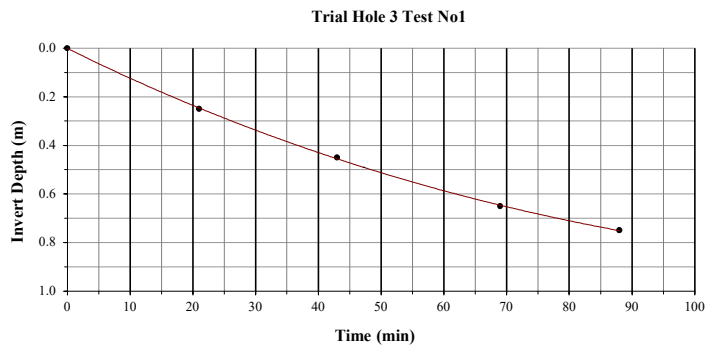

$$y = 7E-08x^3 - 5E-05x^2 + 0.0128x + 0.0011$$

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test

a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area

t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

7.34E-05 m/s

0.0000734488 m/s

264.4155381 mm/hr

0.264415538 m/hr

1.104 m³
5 m²

2769.139041 s

Hole No 3

Excavation time: 8:40

Width	Length	Depth
1200	1600	1150

2.Fill (1m)


Depth Down	Time	T
0	11:51	-
250	12:17	00:26
750	13:31	01:14

Minutes
0
26
74

Y X solver used
Invert Depth Time at Depth

75% =	0.2875	30.291	0.287500036
25% =	0.8625	137.355	0.86250014
50% =	0.575	69.0368	0.575000283

Ap50 5 m2

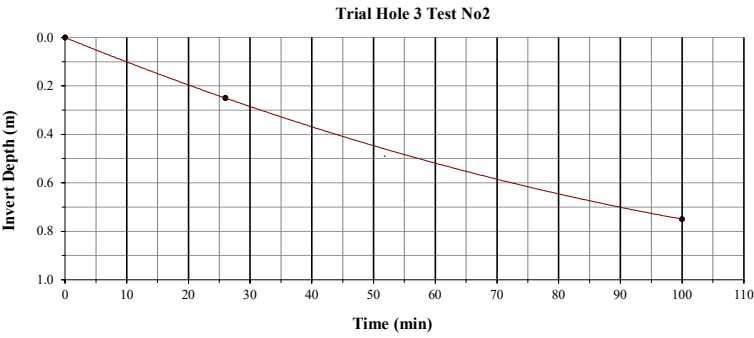

$$y = -3E-05x^2 + 0.0104x - 1E-15$$

Time (min)	Invert (m)
0	0.000
26	0.250
100	0.750

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

3.17E-05 m/s

0.0000316617 m/s

113.9821827 mm/hr
0.113982183 m/hr

Hole No 3

Excavation time: 8:40

Width	Length	Depth
1200	1600	1150

3.Fill (1m)

Depth Down	Time	T	Minutes
0	13:31	-	0
250	14:03	00:32	32
550	14:42	00:39	39
750	15:20	00:38	38

Theoretical

38


Y Invert Depth X Time at Depth solver used

75% = 0.2875
25% = 0.8625
50% = 0.575

36.417
128.785
73.9237

Formula
0.287499463
0.784027257
0.575000195

Ap50 5 m2

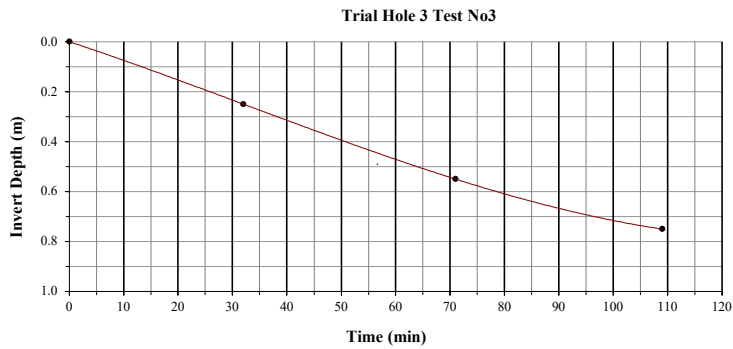

$$y = -3E-07x^3 + 3E-05x^2 + 0.0072x + 4E-15$$

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____

3.67E-05 m/s

0.0000366990 m/s

132.1163914 mm/hr
0.132116391 m/hr

1.104 m³
5 m²
5542.108606 s

Hole No 4

Excavation time: 8:45


Width	Length	Depth
1200	1700	1100

2.Fill (1m)

Depth Down	Time	T
0	11:55	-
250	13:13	01:18
400	14:10	00:57
500	14:43	00:33

Minutes
0
78
57
33

solver used		Formula
Y	X	
Invert Depth	Time at Depth	
75% =	0.275	109.6373
25% =	0.825	307.763
50%	0.55	248.185
Ap50	5	m2

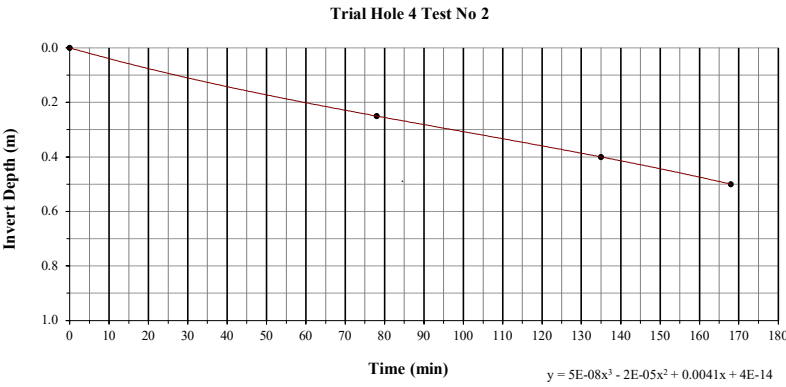


Time (min)	Invert (m)
0	0.000
78	0.250
135	0.400
168	0.500

The soil infiltration rate (f) is determined from

$$f = V_{p75-25} / (a_{p50} \times t_{p75-25})$$

where V_{p75-25} = The effective storage between 75% and 25% of the depth of water in the test
 a_{p50} = Internal surface area of the trial hole up to 50% of the depth of water in the test and including the base area
 t_{p75-25} = Time taken for the water level to drop from 75% effective depth to 25% effective depth taken from the graph above

f _____ **1.74E-05** m/s 0.0000173693 m/s
62.52945863 mm/hr
0.062529459 m/hr

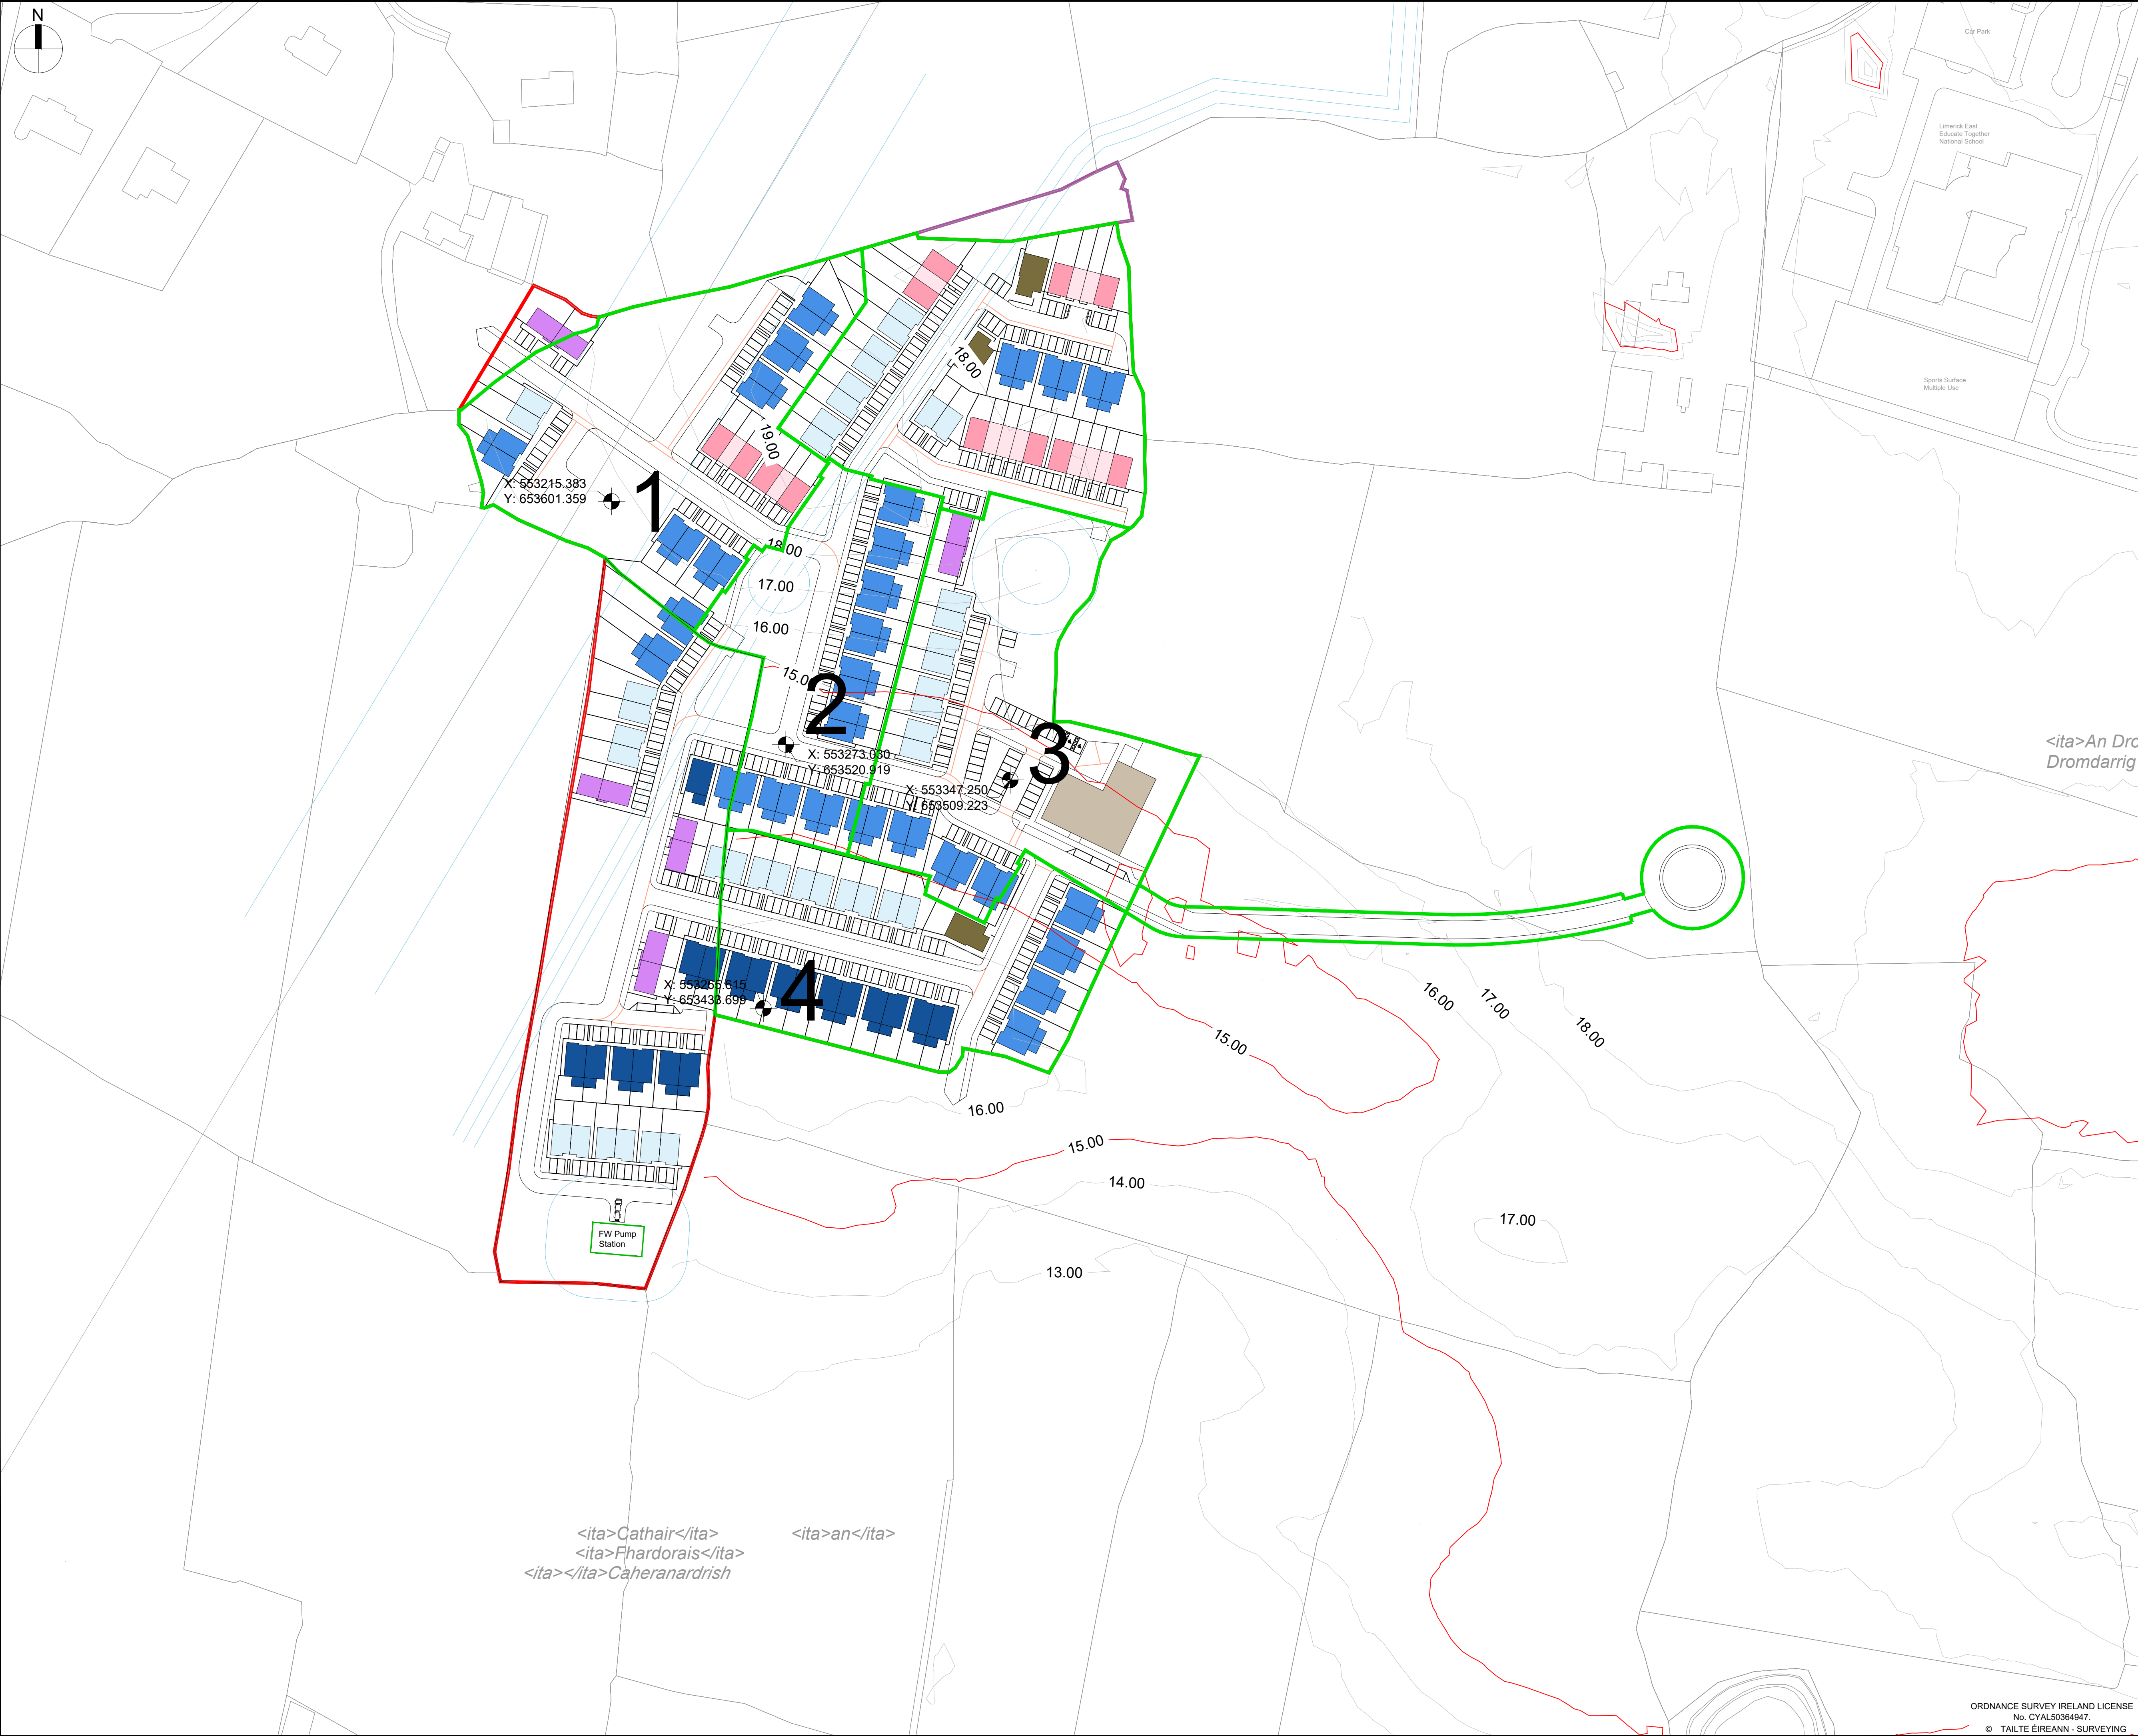

- GENERAL NOTES:
1. ALL DIMENSIONS ARE IN METERS UNLESS NOTED OTHERWISE.
 2. ALL LEVELS ARE TO MALIN HEAD DATUM.
 3. ONLY WRITTEN DIMENSIONS SHALL BE USED. NO DIMENSIONS SHALL BE SCALED FROM THE DRAWINGS.
 4. CONTRACTOR TO CHECK ALL DIMENSIONS ON SITE.
 5. ALL COORDINATES ARE TO IRISH TRANSVERSE MERCATOR
 6. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE PROJECT SPECIFICATIONS.
 7. COPYRIGHT OSL.

0 1.00m 2.0m

REV	DATE	DESCRIPTION	BY	CHKD	AUTH
P02	09.06.25	TEST LOCATIONS REVISED	BJM	DB	DB
P01	04.06.25	ISSUED FOR INFORMATION	BJM	DB	DB



Civil, Structural & Project Engineering Services
Unit 38 Eastgate Drive, Little Island, Cork T45 Y049
Tel: +353 21 4297672

CLIENT

HOMELAND PROJECTS LTD.

PROJECT
BISHOPS QUARTER EXTENSION
MUNGRET
COUNTY LIMERICK


TITLE
PROPOSED SOAKAWAY TEST LOCATIONS

PURPOSE
FOR INFORMATION

ORIGINAL SCALE A1 - 1:1000	ORIGINAL ISSUE DATE 04.06.2025
-------------------------------	-----------------------------------

STATUS S2	DRAWING NO 24051-OSL-00-SK-C-0002	REV P02
--------------	--------------------------------------	------------

Appendix D – Green Roof Details

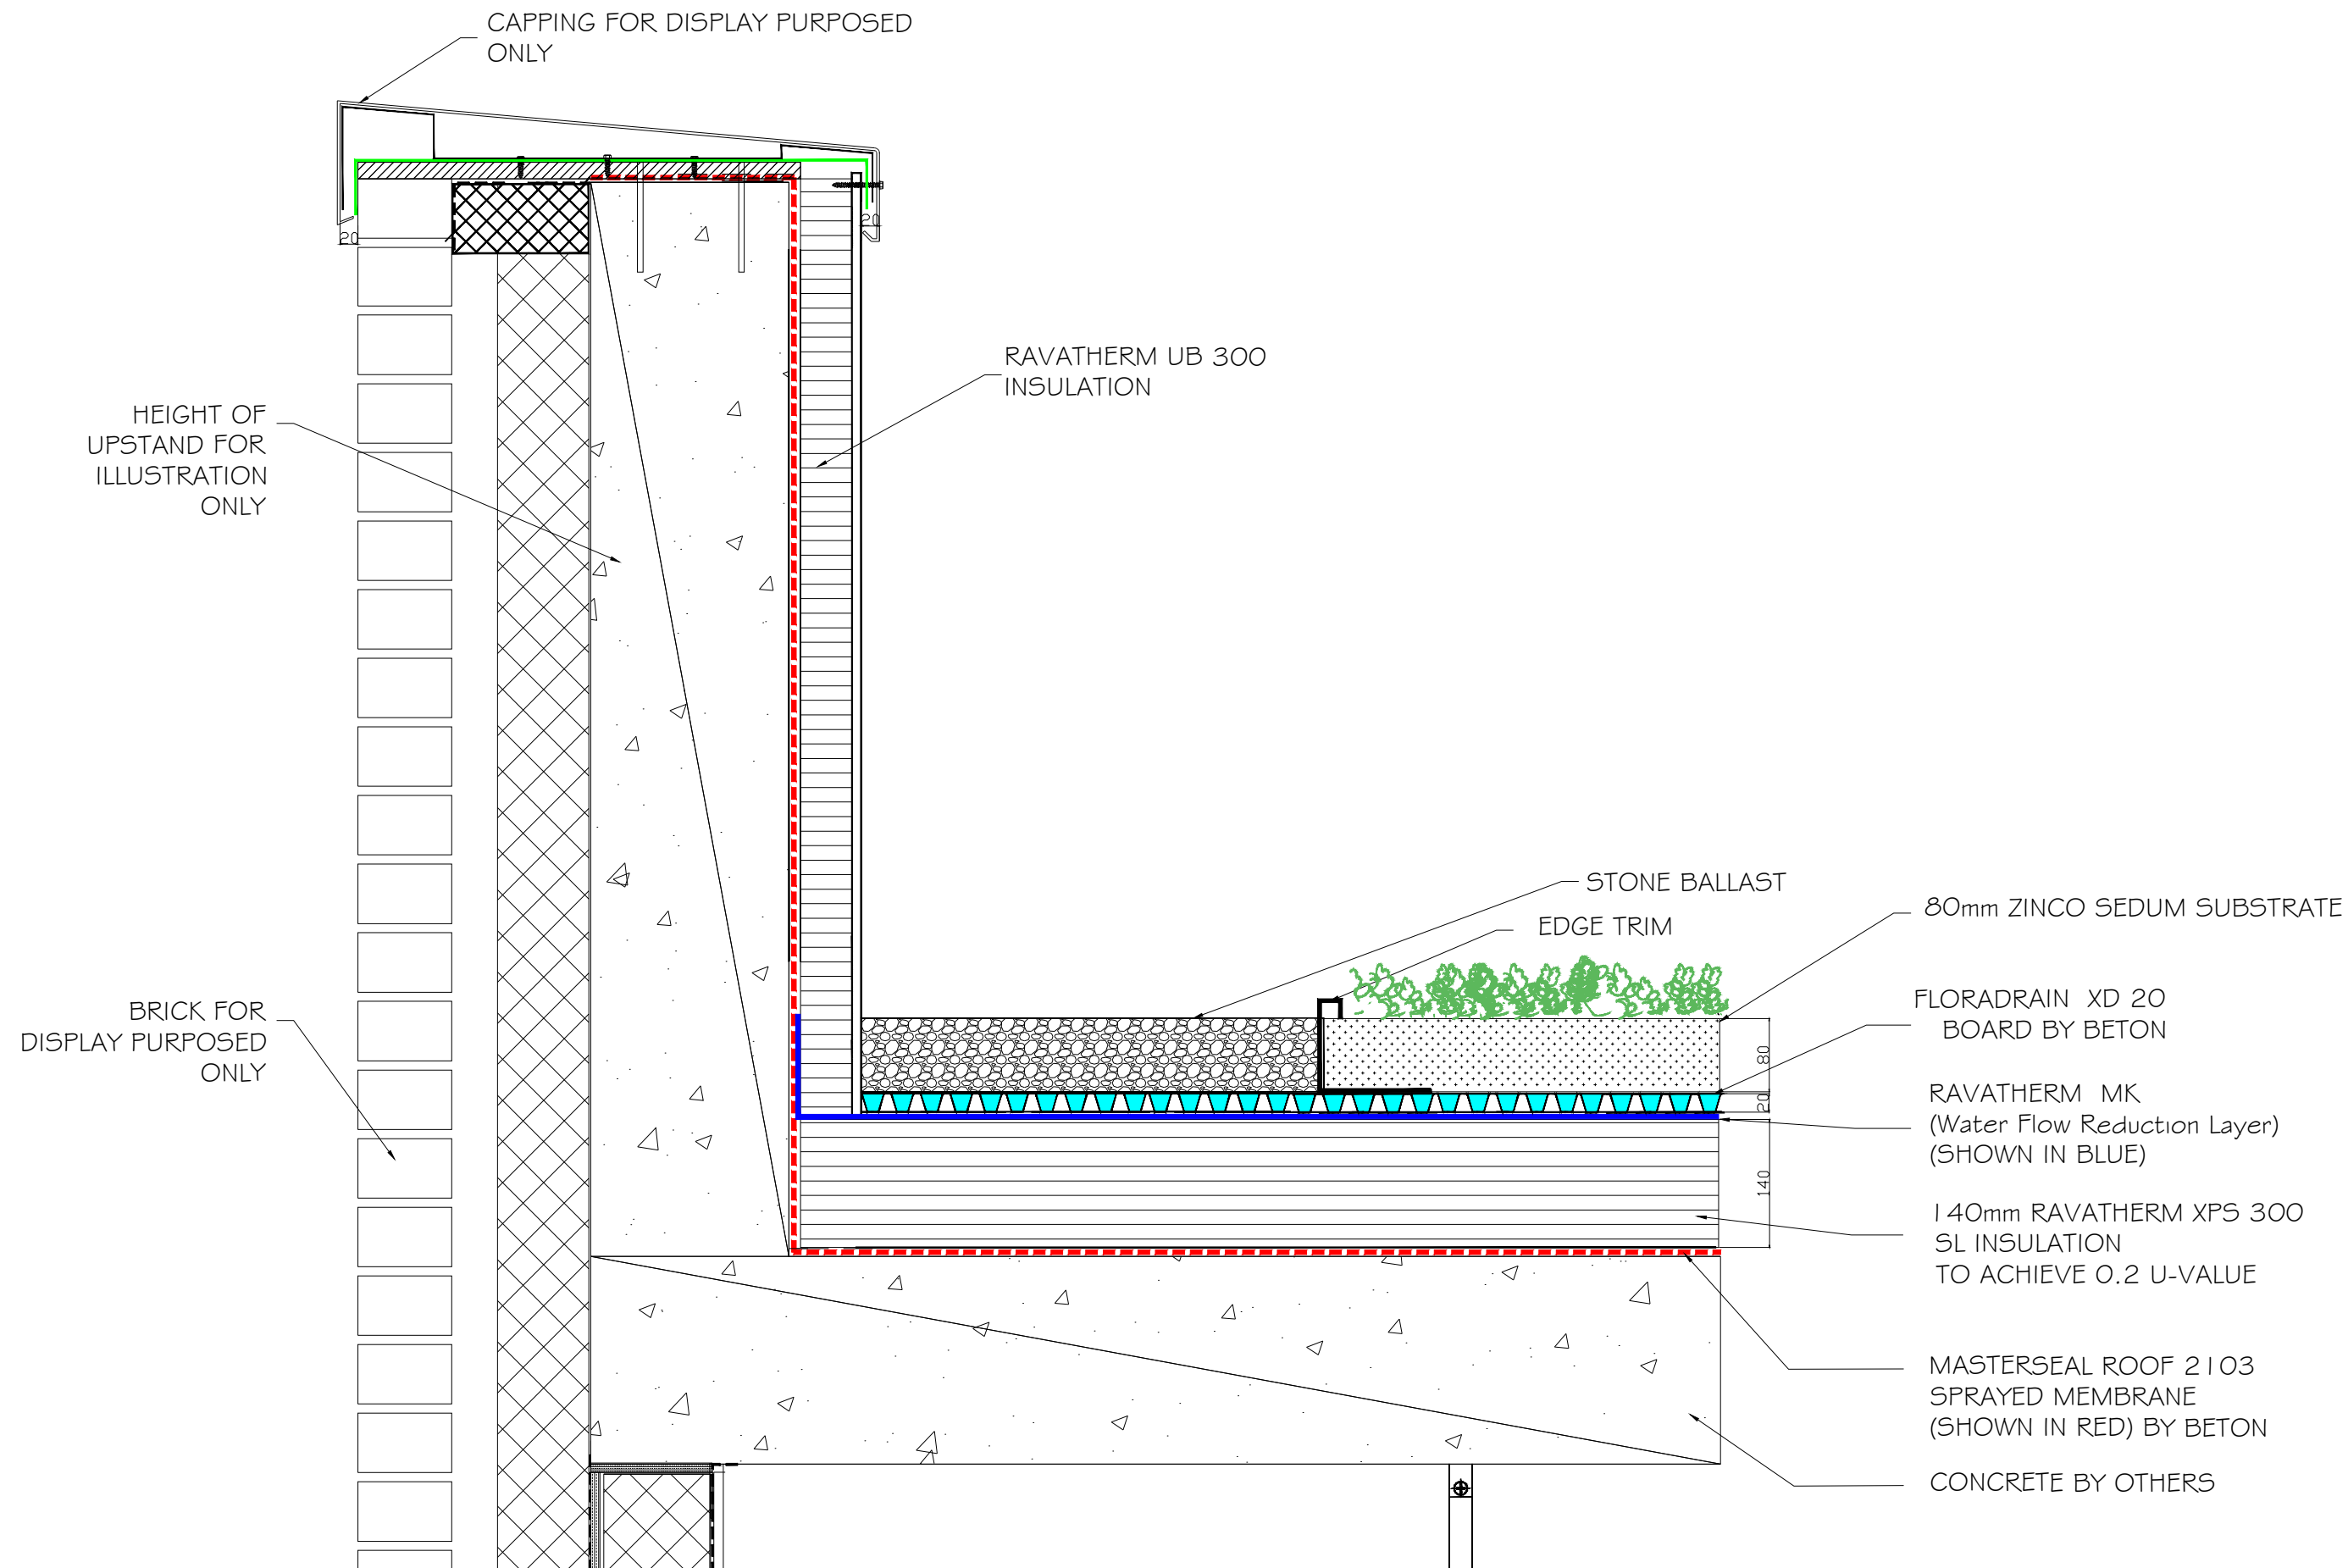

Cork
Beton Construction Services Ltd
Heron Court, Market Quay,
Bandon,
Co.Cork
Phone: +353 23 88 542 31

Dublin
Beton Construction Services Ltd
Unit B14, Aerodrome Business Park
Rathcoole
D24 NW93.
Phone: +353 1 401 6402

TITLE:
SECTION PARAPET GREEN ROOF DETAIL

Project : XX

Scale: NTS

Drawn No: CB-IGR-2022-04-03

Drawn by: AM

Date: 05-03-2026

REV: 1

Note: This Drawing is for illustration purposed
only and not considered a working drawing.

Appendix E – Bypass Interceptor Details

Water Management Solutions

Klargester AquaOil Bypass MDPE and GRP / Full retention MDPE and GRP separator range

HVO
ready**




170 – 69,444m²
Available to cover
flow rates up to
285 litres
per second



Why choose an AquaOil fuel and oil separator?

- Total peace of mind offered through SmartServ Pro remote monitoring system, for early fault detection and in line with Kingspan's Planet Passionate programme
- Total flexibility, with deep invert options available
- Range tested against full flow
- Easily utilised as part of SuDS Management Train
- Full range of bypass and full retention separators available

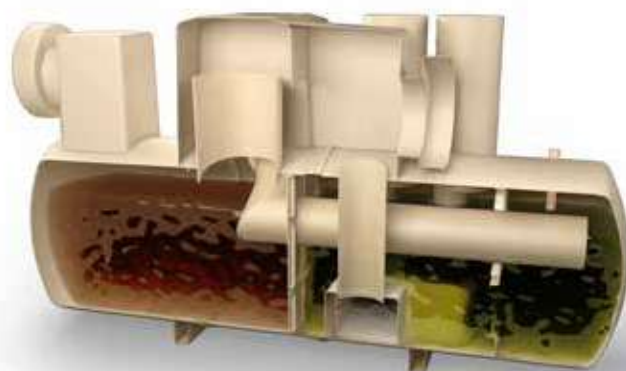

Our range has been tested against full flow - why is this important?

Our units have been tested at their maximum flow rate (10l/s), unlike some products which have been tested based on bypass and therefore only 10% of the flow. This ensures total accuracy of our silt retention results, by replicating the full effect of the silt wash through.

As part of our Planet Passionate programme, Kingspan are dedicated to delivering innovative surface water management technologies, developed on the back of 70 years' experience.

*Terms and conditions apply. View online at <https://www.kingspan.com/gb/en-gb/products/wastewater-management/warranty-terms>

**Also suitable for Midel Oil



Product Code	Flow (l/s)	Drainage Area (m²)	Silt Capacity (ltrs)	Oil Capacity (ltrs)	Length (mm)	Diameter (mm)	Manhole Cover Dimensions (mm)	Base to Inlet Invert (mm)	Base to Inlet Invert (mm)	Min. Inlet Invert (mm)	Std Pipework Diameter (mm)
Polyethylene Chamber Construction											
NSFP003	3	170	300	30	1700	1350	600	1410	1335	550	160
NSFP006	6	335	600	60	1700	1350	600	1410	1335	550	160
GRP Chamber Construction											
NSFA010	10	555	1000	100	2610	1225	600	1050	1000	500	200
NSFA015	15	835	1500	150	3910	1225	600	1050	1000	500	200
NSFA020	20	1115	2000	200	3230	2010	600	1810	1760	1000	315
NSFA030	30	1670	3000	300	3960	2010	600	1810	1760	1000	315
NSFA040	40	2225	4000	400	4750	2010	600	1810	1760	1000	315
NSFA050	50	2780	5000	500	5790	2010	600	1810	1760	1000	315
NSFA065	65	3610	6500	650	7360	2010	600	1810	1760	1000	315
NSFA080	80	4445	8000	800	5744	2820	600	2500	2450	1000	315
NSFA100	100	5560	10000	1000	6200	2820	600	2500	2450	1000	400
NSFA125	125	6945	12500	1250	7365	2820	600	2500	2450	1000	450
NSFA150	150	8335	15000	1500	8675	2820	600	2550	2450	1000	525
NSFA175	175	9725	17500	1750	9975	2820	600	2550	2450	1000	525
NSFA200	200	11110	20000	2000	11280	2820	600	2550	2450	1000	600
NSFA210	210	11667	21000	2100	11994	2820	600	2550	2450	1000	600
NSFA225	225	12500	22500	2250	12766	2820	600	2550	2450	1000	600
NSFA240	240	13333	24000	2400	13528	2820	600	2550	2450	1000	600
NSFA255	255	14167	25500	2550	14300	2820	600	2550	2450	1000	600
NSFA270	270	15000	27000	2700	15071	2820	600	2550	2450	1000	600
NSFA285	285	15833	28500	2850	15833	2820	600	2550	2450	1000	600

Forecourt Separator Range Technical Specifications

Sepaator Class	Backfill Type	Total Capacity (Ltrs)	Darinage Area (m²)	Peak Flow Rate (l/s)	Length (mm)	Diameter (mm)	Access Shaft Diameter (mm)	Base Inlet Invert (mm)	Base to Outlet Invert (mm)	Standard Fall Across (mm)
1	Concrete	10000	720	15	3915	2020	600	2180	2130	50
1	Concrete	10000	115	20	3915	2020	600	2180	2130	50

Bypass Separator Range Technical Specifications

Model Reference	Flow (l/s)	Peak Flow Rate (l/s)	Drainage Area (m²) Based on UK rainwater flow	Storage Capacity (Ltrs)		Length (mm)	Diameter (mm)	Access Shaft Diameter* (mm)	Base Inlet Invert (mm)	Base to Outlet Invert (mm)	Standard Fall Across (mm)	Min Inlet Invert (mm)	Standard Pipework Diameter (mm)**
				Silt	Oil								
Polyethylene Chamber Construction													
NSBP003	3	30	1670	300	45	1700	1350	600	1420	1320	100	500	160
NSBP004	4.5	45	2500	450	60	1700	1350	600	1420	1320	100	500	160
NSBP006	6	60	3335	600	90	1700	1350	600	1420	1320	100	500	160
GRP Chamber Construction													
NSBE010	10	100	5560	1000	150	2069	1220	750	1450	1350	100	700	315
NSBE015	15	150	8335	1500	225	2947	1220	750	1450	1350	100	700	315
NSBE020	20	200	11111	2000	300	3893	1220	750	1450	1350	100	700	375
NSBE025	25	250	13890	2500	375	3575	1420	750	1680	1580	100	700	375
NSBE030	30	300	16670	3000	450	4265	1420	750	1680	1580	100	700	450
NSBE040	40	400	22222	4000	600	3230	1920	600	2185	2035	150	1000	500
NSBE050	50	500	27778	5000	750	3960	1920	600	2185	2035	150	1000	600
NSBE075	75	750	41667	7500	1125	5941	1920	600	2235	2035	200	950	675
NSBE100	100	1000	55556	10000	1500	7661	1920	600	2235	2035	200	950	750
NSBE125	125	1250	69444	12500	1875	9548	1920	600	2235	2035	200	950	750

*Some units have more than one access shaft - diameter of largest shown | **Large pipework available on request.

For more information on any of our products: T: +44 (0)28 3026 6799

E: klargestinfo@kingspan.com or visit klargest.ie

We take every care to ensure that the information in this document is accurate at the point of publication. Specification may vary (within a small parameter) due to manufacturing process variations or environmental conditions. All images are for illustration purposes only and should not be taken as binding. The actual product may vary, and specification/dimensions/colour/other attributes may differ. To ensure you are viewing the most recent and accurate product information, please scan the QR code to the right. ©Kingspan and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries. All rights reserved. Registered in Country No.NI017631. Registered Office: 180 Gilford Road, Portadown, Co. Armagh, BT63 5LF. VAT GB412 5124 03

04/2025_v2_4360.01.ie




Appendix F – Attenuation Systems

WATER MANAGEMENT

AquaCell systems

Product and installation manual

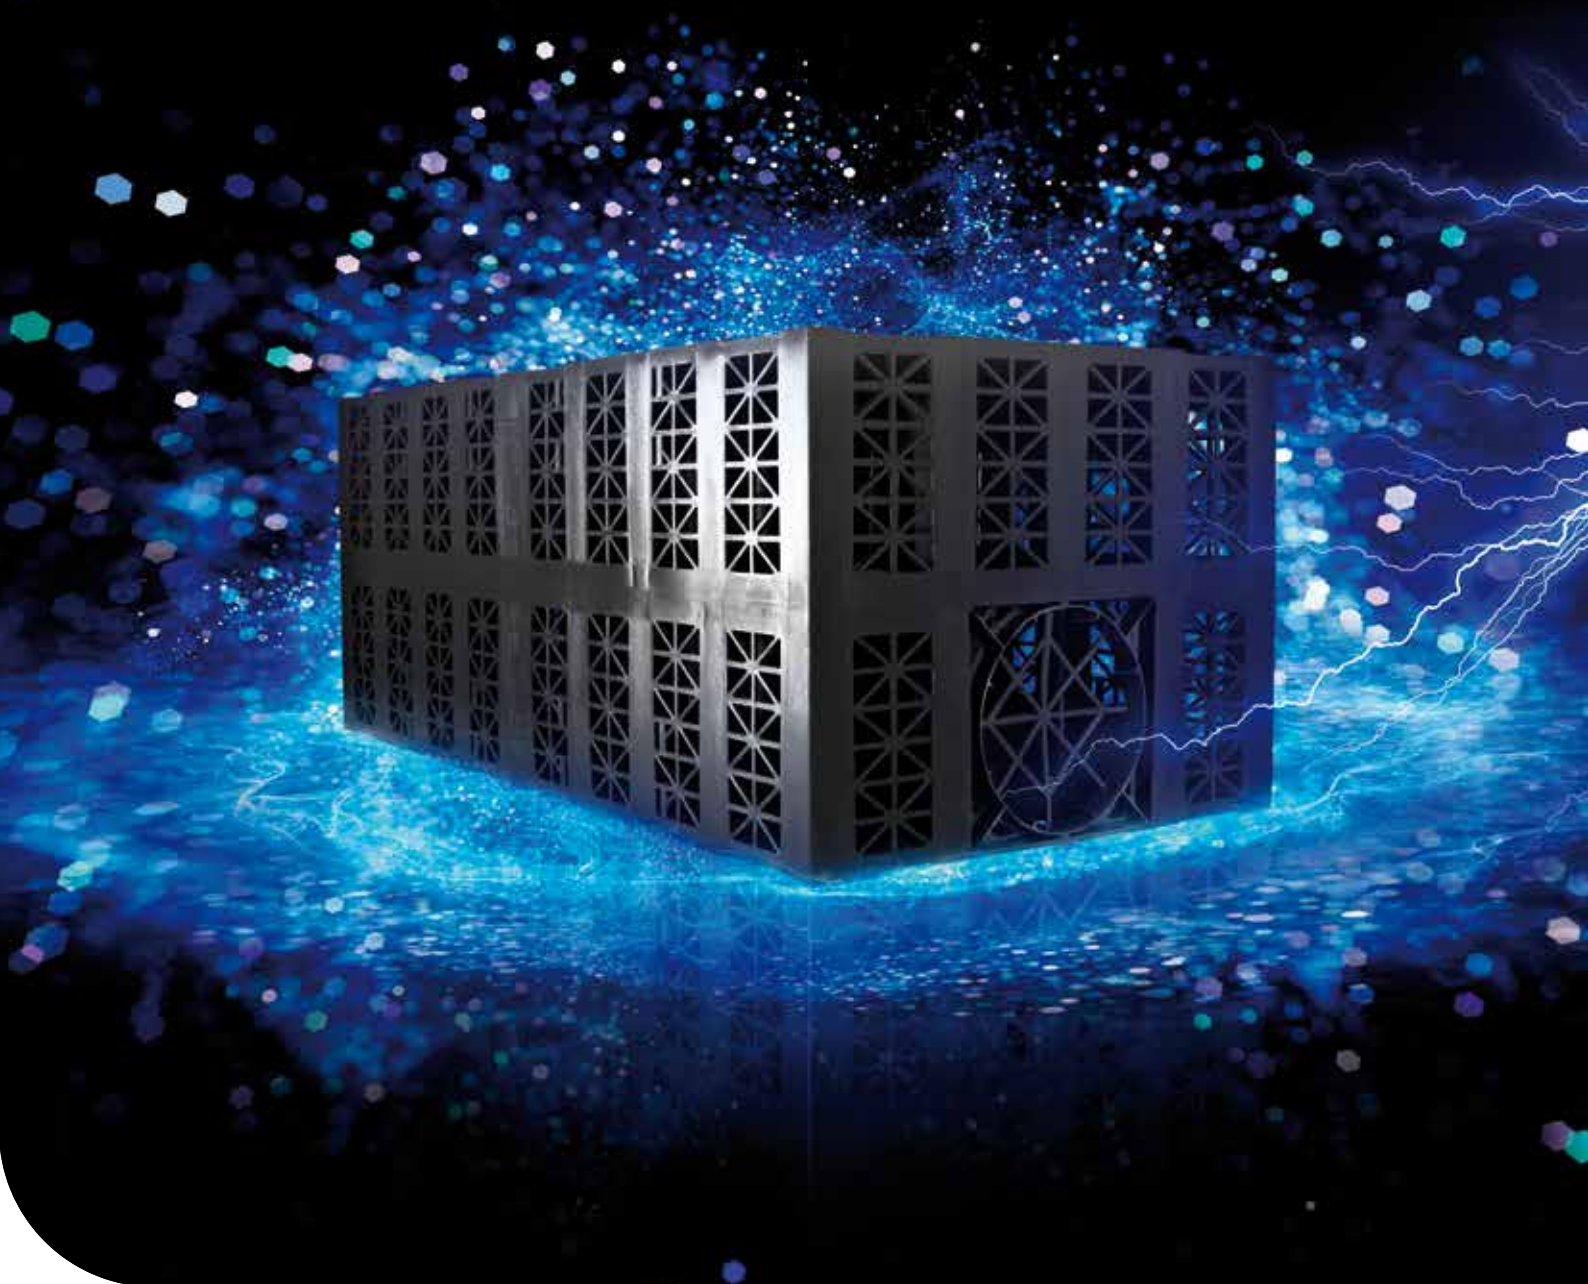

Contents

Eco

Core-R

Plus-R

Introduction to SuDS 3

Keeping you on top of legislation . . 4

Overview 5

Product range summary 6

Product details 7

AquaCell Eco 7

AquaCell Core-R 8

AquaCell Plus-R 9-10

Design guidance 11-15

Installation guidance 16

AquaCell Core-R and Plus-R:

Construction loads 16

AquaCell Eco: Construction loads . . 16

Installation 17

Typical soakaway installation 17

Typical storage tank installation 18

Silt Trap and Air Vent termination . . . 19

Connections 20

Top connection for Air Vent 20

Side connection for Air Vent 20

Connections to AquaCell units 21

Connection configurations 22

Soakaway – non-traffic loading 23

Soakaway – traffic loading 24

On-line storage – box feed 25

On-line storage – manifold feed 26

On-line storage – central pipe feed . . 27

Off-line storage – box feed 28

Off-line storage – manifold feed 29

Off-line storage – central pipe feed . . 30

Soakaway or storage tank –
with Silt Trap 31

Wavin stormwater management . 32

Supplementary items 33

Silt Traps 33

Ancillaries 34-35

Spares 36

Your notes 37

Introduction to SuDS

Continuing urban development, a changing climate and the consequences of increased rainfall are all increasingly prominent issues on the political and environmental agenda and all drive the need to actively manage excessive rainfall across new and existing developments through the use of Sustainable Drainage Systems (SuDS).

Designed correctly drainage systems can assist in delivering sustainable development whilst improving the spaces where we live, work and play.

The SuDS approach to managing water takes account not just of how water quantity is managed but also considers how improvements to water quality can be delivered as well as the creation of habitats promoting biodiversity and amenity for the community.

Good SuDS aim to mimic nature and manage rainfall close to where it falls. They are designed to move and attenuate water within the development before it is released into water courses. Water is stored within the development where is allowed to infiltrate into the ground or is released at a controlled rate to prevent issues downstream.

The CIRIA SuDS Manual gives guidance on all areas of SuDS and focuses on the cost-effective planning, design, construction, operation and maintenance of SuDS.

Which SuDS components are best?

SuDS should help maximise amenity and biodiversity, whilst also delivering key objectives to manage flood risk and water quality. For any given site, SuDS should be considered as a sequence of components designed to efficiently drain surface water whilst minimising pollution.

Selection of which SuDS components is best for each development is dependent on the site specific requirements.


How can Wavin help with SuDS projects?

Wavin is well qualified to advise on how to comply with current and emerging regulation. We can aid specifiers, developers and contractors in responding to legislative demands as they pertain to flooding, sewage, urban drainage and sustainable resources use.

In particular, the proven qualities and performance of AquaCell systems not only support the achievement of SuDS, they can also help reinforce and enhance planning applications and enable development to proceed.

CIRIA SuDS Design

Source: The SuDS Manual (CIRIA)

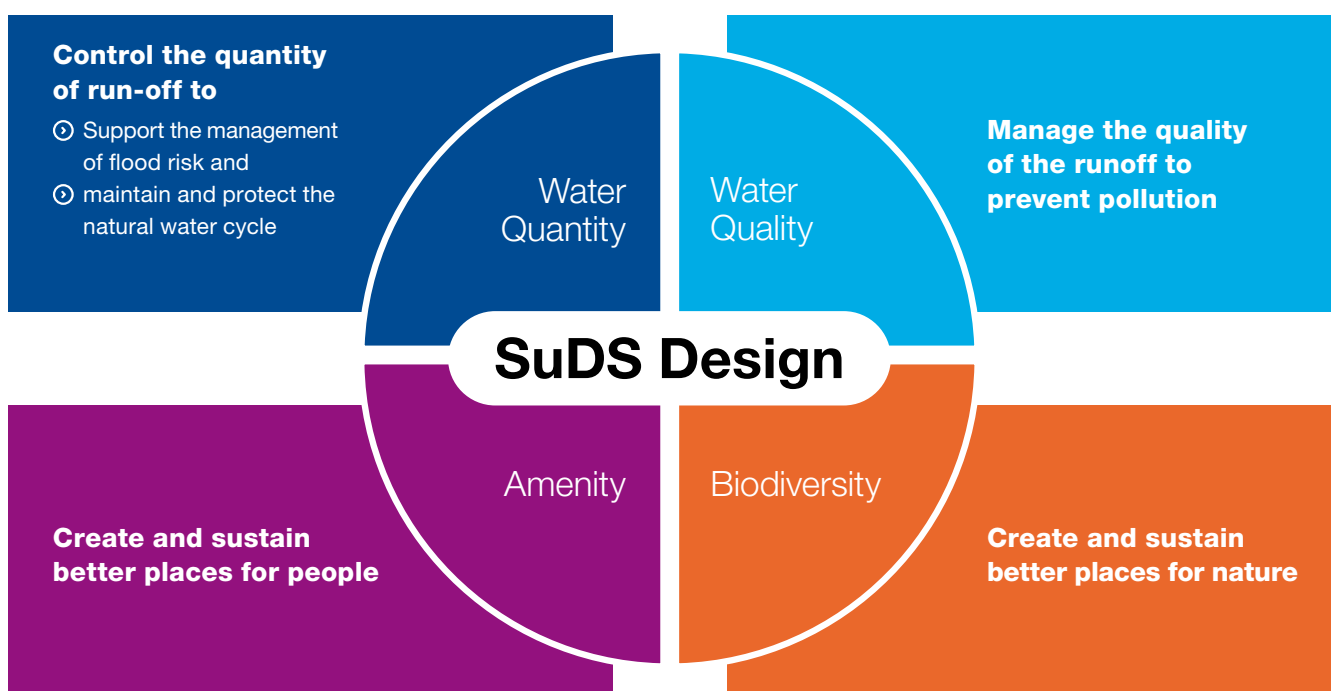

Keeping you on top of legislation

Flood and Water Management Act 2010

The Flood and Water Management Act was designed to reduce the risk of flooding and its consequences by providing for better, more comprehensive and co-ordinated water management, embracing groundwater, surface water and coastal erosion risk. Schedule 3 of the act gives DEFRA responsibility for establishing national standards for sustainable drainage and empowers local authorities to manage local flood risk by adopting and maintaining sustainable drainage schemes. In January 2019 Schedule 3 was implemented by the Welsh Government. This legislation effectively makes the use of SuDS mandatory on new developments with the aim of reducing flood risk and improving water quality. The new standards for Wales support the 'four pillars' of SuDS.

Sewers for Adoption

In England the framework for the delivery of SuDS in the absence of Schedule 3 is through a revision to Sewers for Adoption to include some SuDS components as adoptable by the Water and Sewage Companies. The document, currently with Ofwat for approval, is expected to be introduced early 2020. When it comes into force it will be the only guide to the standards that sewers must meet if they are to be adoptable by WaSCs in England. The new document will, for the first time, offer guidance on SuDS components (although not all) that can be adopted by Water and Sewerage Companies with standards on the flood risk performance that is expected.

The Water Environment and Water Services (WEWS) (Scotland) Act 2003

In Scotland WEWS makes Scottish Water responsible for SuDS that deal with the run-off from roofs and any paved ground surface within the property boundary. In order to deliver this SuDS need to be designed to Scottish Water's specifications as set out in their manual, Sewers for Scotland v4.0. In addition, the law makes the use of SuDS obligatory when dealing with surface water drainage from all new developments.

The EU Water Framework Directive

Nearly half the EU population lives in 'water-stressed' countries, caused by high extraction from freshwater sources, and demand is growing all the time. The EU Water Framework Directive introduces a new legislative approach designed to better manage and protect water resources, based not on national or political boundaries but on the natural catchment of river basins.

Building Regulation Part H (Drainage and Waste Disposal)

Building Regulation Part H embraces the guidelines for drainage and waste disposal that must be met in the UK. Although Part H extends to rainwater drainage and solid waste storage, waste drainage issues are to the fore. The Building Regulations are designed to ensure that all foul water is properly disposed of to maintain a decent level of sanitation, promoting both personal and environmental health. The regulations also highlight the importance of pollution prevention, working sewage infrastructure and sewage maintenance. With regards to stormwater, Building Regulations Approved Document H3 stipulates that adequate provision should be made for rainwater to be carried from the roof of a building to either a soakaway, water course or sewer.

National Planning Policy Framework

Section 14 of the National Planning Policy Framework sets out policy to ensure that flood risk is taken into account at all stages of the planning process and that inappropriate development in areas at risk of flooding is avoided. The policy directs development away from areas of highest risk and where new development is, exceptionally necessary in such areas, aims to make it safe without creating an increase in flood risk elsewhere and, where possible, reduce flood risk overall. It also states developments should only be allowed in an area of flood risk if it incorporates sustainable drainage systems, unless there is clear evidence that these would be inappropriate.



Overview

The AquaCell range of geocellular systems are a fully tried and tested, modular technique for managing excessive rainfall.

Applications

The AquaCell range can be used as either a temporary storage tank or as a soakaway, and is suitable for applications including:

- Ⓞ Landscaped areas
- Ⓞ Parks
- Ⓞ Domestic gardens
- Ⓞ Residential developments
- Ⓞ Car parks & roads
- Ⓞ Industrial/commercial areas



The AquaCell range

There are three types of AquaCell unit. Each can be used as a standalone system or different unit types can be mixed and matched together in layers to value engineer the most cost effective solution.

All AquaCell units have identical dimensions (1m x 0.5m x 0.4m), but they are manufactured to perform differently. The type of unit, or combination of units required will depend on factors such as the load application, overall installation depth and site conditions.

Features and benefits

The following are applicable to all AquaCell units:

- Ⓞ Modular, lightweight and versatile
 - Ⓞ Easy to handle and quick to install
 - Ⓞ Proven clip and peg connection system
 - Ⓞ 95% void (each unit holds 190 litres of water)
 - Ⓞ Can be brick-bonded for extra stability
 - Ⓞ Units can be mixed and matched together for optimum performance
 - Ⓞ Full range of ancillaries
 - Ⓞ Can be used as integral part of a SuDS scheme
- In addition, AquaCell Eco and AquaCell Core-R are fully BBA approved (Certificate No. 03/4018).


Environmental benefits

In addition, the AquaCell range can also offer the following environmental benefits:

- Ⓞ Reduced flooding risk
- Ⓞ Controlled release of stormwater into watercourses or, where permitted, existing sewer systems
- Ⓞ Recharging of local groundwater (if infiltration/soakaway application)
- Ⓞ Aerobic purification to improve water run-off quality
- Ⓞ Sustainable, cost effective management of the water environment



Eco

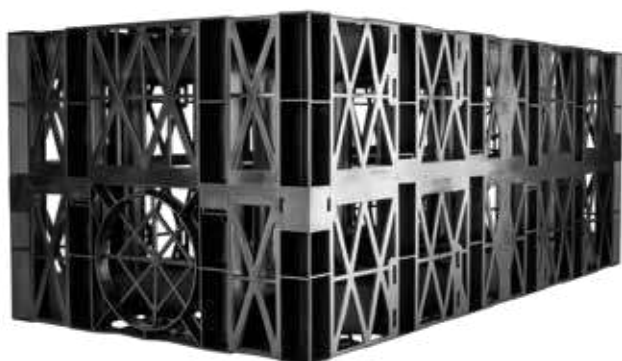

Eco is manufactured from specially reformulated, recycled material and has been designed for shallow, non-trafficked, landscape applications.

AquaCell Configurator Tool




Optimise tank and soakaway designs with the AquaCell Configurator Tool

The AquaCell Configurator tool aids and speeds the efficient design of stormwater tank or soakaway solutions. The tool guides users through a step-by-step specification process and, based on responses, will recommend the optimum design, based on the loadings, depths and site conditions of each project.

The tool generates a PDF of the design for easy download and can store the data online for future reference. To start using the tool or to learn more visit: myportal.wavin.co.uk/tools

Core-R

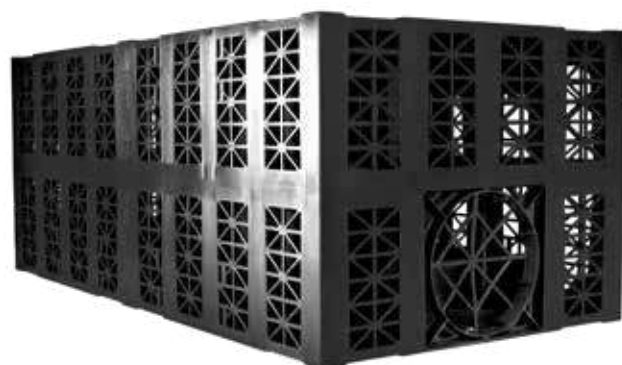

Core-R has been designed for use in deep applications, subject to both regular and heavy traffic loadings, such as cars and HGV's.

Plus-R



Plus-R has been designed primarily for use in applications where inspectability is required, and is suitable for use in all applications from landscaped areas to heavily trafficked areas including HGV.

AquaCell Eco

Application

AquaCell Eco is manufactured from specially reformulated, recycled material and has been specifically designed for shallow, non-trafficked, landscaped applications. AquaCell Eco is **NOT** suitable for locations subject to high water tables.

AquaCell Eco is typically suitable for installations to a maximum depth of 2.68 metres, to the base of the units from ground level, with a minimum cover depth of 0.3 metres, (CIRIA's recommendation, is to allow a cover depth of 0.5 metres in applications where a ride on mower may be used).



Any installation using AquaCell Eco must **NOT** be subjected to additional loading at any time. Trafficking by construction plant on site, including mechanical equipment, must be avoided.

If trafficking of the buried tank by construction plant or, other vehicles is unavoidable, the installation should be constructed using AquaCell Core-R units (see page 9).

The width of an AquaCell Eco installation should not exceed 12 metres to allow for mechanical backfilling without loading. There is no limit to the length of the installation.


Features and benefits

- ⌚ Manufactured from specially reformulated, recycled material
- ⌚ Suitable for both soakaway and attenuation applications
- ⌚ Proven vertical loading capacity of: 21.3 tonnes/m² (213kN/m²)
- ⌚ Proven lateral loading capacity of: 5.2 tonnes/m² (52kN/m²)
- ⌚ Integral "hand holds" for ease of carrying/handling
- ⌚ BBA approved – Certificate No 03/4018

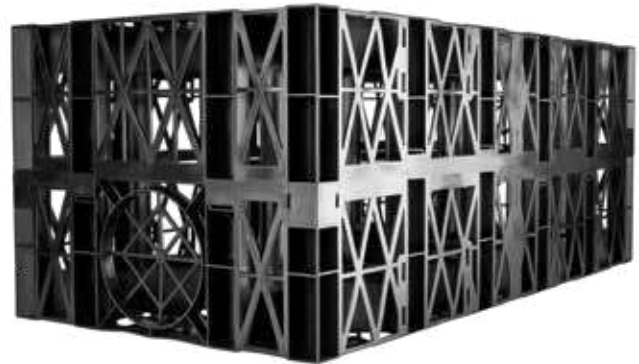

Material: Reformulated polypropylene

Nominal size (mm)	Part number	Dimensions (mm)		
		W	H	L
160	6LB025	500	400	1000

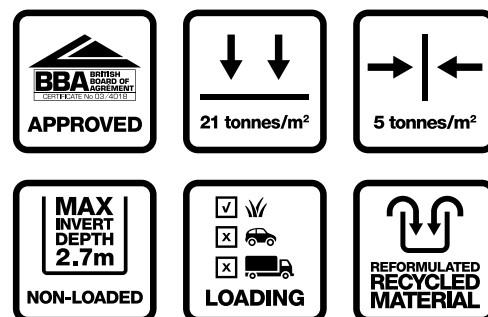

Maximum installation depths – to base of units (m)¹

Typical soil type	Soil weight kN/m ³	Angle of internal friction ϕ (degrees) ^{2, 3}	Landscaped areas
Over-consolidated stiff clay	20	24	1.53
Silty sandy clay	19	26	1.68
Loose sand and gravel	18	30	2.08
Medium dense sand and gravel	19	34	2.35
Dense sand and gravel	20	38	2.68

(1) These values relate to installations where the groundwater is a minimum of one metre below the base of the excavation.

(2) AquaCell Eco units should not be used where groundwater is present.

(3) 0.5m cover is required where a ride-on mower may be used.

Assumptions made: ⌚ Ground surface is horizontal

⌚ Shear planes or other weaknesses are not present within the structure of the soil.

AquaCell Core-R

Application



AquaCell Core-R has been designed for use in deep applications, subject to regular and heavy traffic loadings, e.g. cars and HGV's. AquaCell Core-R can also be used for deep soakaways and landscaped applications.

Typically for use down to depths of 6.24m in landscaped areas (5.99m trafficked by cars) to the base of the units from ground level, in best soil conditions.



Trafficking by heavy construction plant on site, including mechanical equipment, must be avoided until the minimum cover depth of 1.21 metres is in place.

Features and benefits

- ③ Suitable for regular and heavy traffic loadings
- ③ Proven vertical loading capacity of: 65 tonnes/m² (650 kN/m²)
- ③ Proven lateral loading capacity of: 11 tonnes/m² (110kN/m²)
- ③ BBA approved – Certificate No 03/4018
- ③ Ideal for all types of shallow and deep projects including major attenuation and infiltration schemes

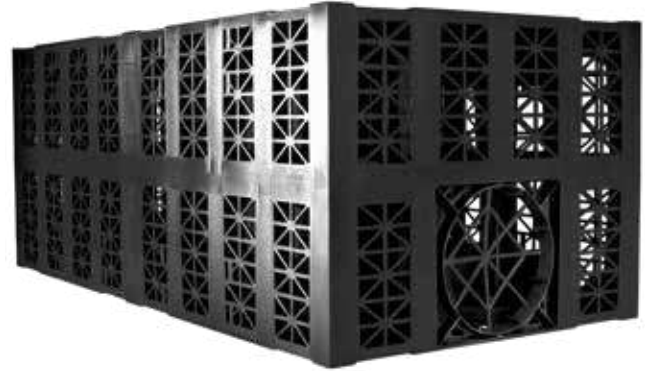

Nominal size (mm)	Part number	Dimensions (mm)		
		W	H	L
160	6LB150	500	400	1000



Maximum installation depths – to base of units (m)¹

Typical soil type	Soil weight kN/m ³	Angle of internal friction ϕ (degrees) ^{2,3}	Landscaped areas	Vehicle mass <9 tonnes ^{4,5}	Vehicle mass <44 tonnes
Over-consolidated stiff clay	20	24	3.60	3.35	3.10
Silty sandy clay	19	26	4.07	3.81	3.54
Loose sand and gravel	18	30	4.99	4.71	4.43
Medium dense sand and gravel	19	34	5.55	5.28	5.02
Dense sand and gravel	20	38	6.24	5.99	5.74

- (1) Without groundwater present below base of units – AquaCell Core-R may be used where groundwater is present, contact Wavin for technical advice.
- (2) Loosening of dense sand or softening of clay by water can occur during installation. The designer should allow for any such likely effects when choosing an appropriate value of ϕ .
- (3) The design is very sensitive to small changes in the assumed value of ϕ , therefore, it should be confirmed by a chartered geotechnical engineer. In clay soils, it may be possible to utilise cohesion in some cases.
- (4) Applicable for car parks or other areas trafficked only by cars or occasional refuse collection trucks or similar vehicles (typically one per week).
- (5) This category should be used when considering landscaped areas that may be trafficked by ride on mowers.

Assumptions made: ③ Ground surface is horizontal

③ Shear planes or other weaknesses are not present within the structure of the soil.

AquaCell Plus-R

Application

AquaCell Plus-R has been designed primarily for use in applications where inspection is required. It is suitable for use in all applications from landscaped areas to heavily trafficked areas (for vehicles up to 44 tonnes). The units can be used in combination with AquaCell Core-R (and Eco if there is at least one layer of Core-R in between the Plus-R and Eco layer).

Extra lateral loading capacity allows installation at greater depths. Integral inspection channels in each unit combine to create viewing channels for the full length of the installed structure.

Typically for use down to depths of 7.82m in landscaped areas (7.57m trafficked by cars and 7.3m trafficked by HGV's) to the base of the units from ground level, in best soil conditions. Trafficking by heavy construction plant on site, including mechanical equipment, must be avoided until the minimum cover depth of 1.30 metres is in place.

Features and benefits


- ⌚ Suitable for extra deep installations
- ⌚ Inspectable (supplied with end cap for use when an inspection channel is not required)
- ⌚ Proven vertical loading capacity of: 70.2 tonnes/m² (702 kN/m²)
- ⌚ Proven lateral loading capacity of: 15.1 tonnes/m² (151 kN/m²)

Maximum installation depths – to base of units (m)¹

Typical soil type	Soil weight kN/m ³	Angle of internal friction ϕ (degrees) ^{2,3}	Landscaped areas	Vehicle mass <9 tonnes ^{4,5}	Vehicle mass <44 tonnes
Over-consolidated stiff clay	20	24	4.67	4.42	4.17
Silty sandy clay	19	26	5.03	4.78	4.53
Loose sand and gravel	18	30	5.86	5.61	5.36
Medium dense sand and gravel	19	34	6.87	6.62	6.37
Dense sand and gravel	20	38	7.82	7.57	7.30


- (1) Without groundwater present below base of units – AquaCell Plus-R may be used where groundwater is present, contact Wavin for technical advice.
- (2) Loosening of dense sand or softening of clay by water can occur during installation. The designer should allow for any such likely effects when choosing an appropriate value of ϕ .
- (3) The design is very sensitive to small changes in the assumed value of ϕ , therefore, it should be confirmed by a chartered geotechnical engineer. In clay soils, it may be possible to utilise cohesion in some cases.
- (4) Applicable for car parks or other areas trafficked only by cars or occasional refuse collection trucks or similar vehicles (typically one per week).
- (5) This category should be used when considering landscaped areas that may be trafficked by ride on mowers.

Assumptions made: ⌚ Ground surface is horizontal
 ⌚ Shear planes or other weaknesses are not present within the structure of the soil.



Material: Polypropylene

Nominal size (mm)	Part number	Dimensions (mm)		
		W	H	L
160	6LB200	500	400	1000

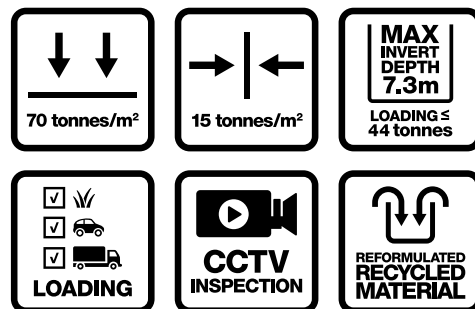

AquaCell Plus-R: for inspectability

By aligning AquaCell Plus-R units end-to-end, full length viewing channels can be created – allowing for CCTV inspection if required. These are created in the bottom layer of an AquaCell tank installation.

The units can be used in combination with AquaCell Core-R (and with Eco if there is at least one layer of AquaCell Core-R in between the Plus-R and Eco layer).

NOTE: For any AquaCell Plus-R units on the perimeter of a structure that are NOT required for inspection access, the open ends of the integral inspection tunnels should be fitted with the end caps provided.

Inspection chambers

An inspection chamber should precede the inlet pipework for the AquaCell structure.

A silt trap or hydro-dynamic separator prior to the inspection chamber is also recommended.

For on-line installations the following Chambers are recommended:

- Down to 3m Wavin Non-Entry Inspection Chambers
- Down to 5m Wavin Range 600 Inspection Chambers, or a traditional manhole*

**where inlet pipework is replaced by AquaCell units acting as flow conduit.*

For off-line installations:

- Manhole with in-built flow control

Recommendation: If installing any Wavin Non-Entry Inspection Chamber, deeper than 1.2 metres, ensure that the cover and frame includes a 350mm restrictor to prevent man entry.

Inspection and maintenance

CCTV inspection at every inspection point is recommended:

- after every major storm
- at regular intervals according to the specific maintenance plan for the site



Silt traps prior to inlet pipework should be routinely inspected and cleaned out to minimise debris reaching the tank. It is important to prevent construction silt from entering the AquaCell structure.

Inspectability scenarios

AquaCell Plus-R viewing channel



Trafficked tank installation with inspection chambers

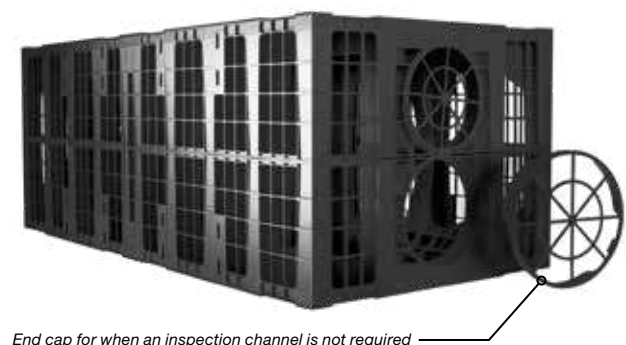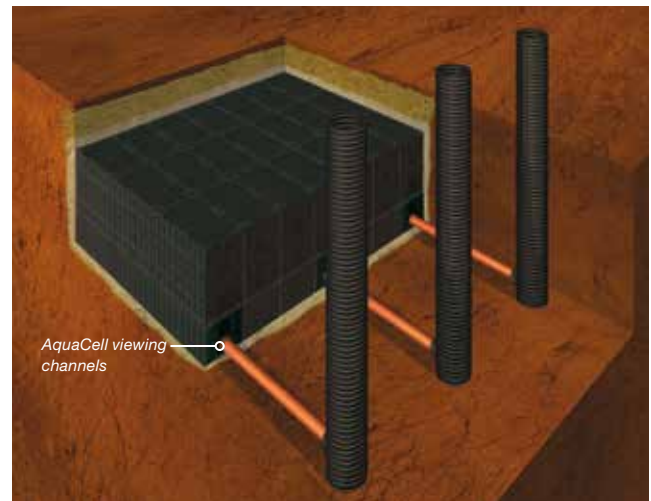

Design guidance

Infiltration or attenuation?

The AquaCell range can be used either as:

- ④ A soakaway whereby the units will be installed in suitable pervious soils so the units can be wrapped in a geotextile to allow infiltration of the stormwater into the surrounding ground, or
- ④ As an attenuation tank in impervious ground (e.g. clay) where infiltration is not possible, here the units are encapsulated in a geomembrane (which is in turn wrapped in a protective geotextile layer) so that the structure can hold the stormwater temporarily until local drainage flows can accept it for normal disposal at a permissible outflow rate.

Large scale AquaCell Core-R storage tank



Domestic AquaCell Core-R soakaway



Site assessment

Ground conditions may be established as part of a geotechnical assessment. This may include tests for infiltration and ground water level.

If there is no confirmation that such assessments have been conducted, or resulting conclusions are unavailable, a trial pit will be required in accordance with BRE 365.

For further information and guidance, please contact the Wavin Technical Design Team.

Infiltration (soakaways)

According to the principals of SuDS, wherever possible stormwater should be drained back into the ground via a soakaway as the first priority. A site must meet BOTH of the following criteria for infiltration to be possible:

- ④ The underlying soil surrounding the proposed installation is sufficiently permeable
- ④ The seasonally high water table is a minimum of 1 metre below the base of the proposed installation

If either of these criteria is not met, or cannot be confirmed for any reason, a soakaway system may not be suitable for the application, in which case a storage tank must be used.

Attenuation (storage tanks)

A storage tank may be designed to be online or offline (see pages 26-31 for typical details). However, if the site is subject to groundwater or a high water table, it is important to ensure that the tank is not vulnerable to flotation. Sufficient weight from soil, or other covering placed over the AquaCell units, must be sufficient to counter any buoyancy uplift force from the rising groundwater level.

Important design considerations for geocellular structures

Rising rainfall levels and increased focus on SuDS compliance, have led to an increase in the use of modular units to create underground structures for infiltration or the temporary storage of stormwater.

However, not all currently available systems have the proven performance characteristics necessary to meet the wide range of complex underground geocellular applications.

The Wavin range of AquaCell units provide assured performance, since all strength and hydraulic capabilities have been verified by independent testing and our ECO and CORE-R units are both BBA approved.


To guarantee the structural integrity of an engineered drainage system, any underground structure must be strong enough to support the loads to which it will be subjected without any unacceptable deflection.

The correct choice of geocellular unit must have appropriate proven top (vertical) and side (lateral) load bearing capacity and deflection characteristics to suit site conditions.


The five key site considerations to be noted when designing a geocellular structure are:

1. Depth of cover (See page 14)
2. Soil type
3. Surface finishing
4. Presence of groundwater
5. Type of traffic/loading

A: Non-trafficked

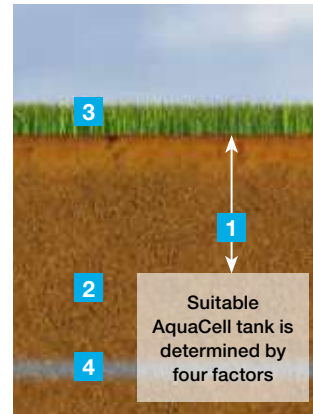

B: Trafficked

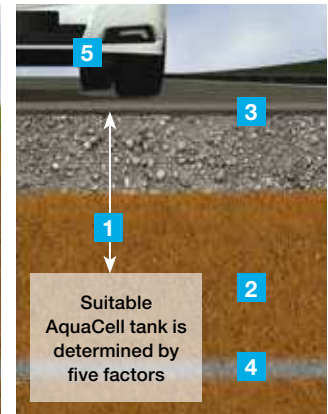

The combination of these 5 factors effectively means that the required characteristics of a geocellular structure to be installed under a trafficked location (for example) will be very different from that under a landscaped/low-loaded location.

Two typical examples are given below.

Example A: Landscaped/non-trafficked location and 0.3m cover depth. Typically requires minimum vertical strength of 17.5 tonnes/m²

Example B: Car park with occasional light delivery traffic and between 0.5 – 0.7m cover depth. Typically requires minimum vertical strength of 40 tonnes/m²

Design guidance

Hydraulic design

All AquaCell units have identical dimensions: 1m x 0.4m x 0.5m, have a nominal void ratio of 95% and each holds 190 litres of water. Hydraulic calculations are accordingly the same for AquaCell Eco, Core-R and Plus-R.

Structural design however, requires careful consideration of loading factors specific to each location – see CIRIA C680 or CIRIA C737 for further guidance (we recommend using the BPF Guide Designing Geocellular Drainage Systems to CIRIA Report C737 alongside.)

Structural design – installation and cover depths

Each AquaCell unit has been designed to have specific loading capacities (see pages 8-10) that define the maximum depth parameters for which they are suitable.

Minimum depth of cover varies according to whether or not the installation will be subject to trafficking by cars/HGVs.

However, in some situations, installations may have to be located with greater cover depths. Reasons may include:

- Deep-running drainage network
- Other buried services running above tank location
- Installation into banked/ sloping ground
- Upper layer of clay preventing infiltration

The table shows a summary of typical cover depths and installation depths as a guide.

Typical minimum cover depths and maximum installation depths

Location type	Minimum cover depths (m)		
	AquaCell Eco	AquaCell Core-R	AquaCell Plus-R
Landscaped/non-trafficked areas ²	0.30	0.30	0.30
Car parks, vehicle mass up to 9 tonnes ¹	n/a	0.64	0.69
HA/HGV loading up to 60 tonnes	n/a	1.21	1.30
	Maximum installation depths (m) ³		
Maximum depth to base of unit (Landscaped)	2.68	6.24	7.82
Maximum depth to base of unit – vehicle mass up to 9 tonnes	n/a	5.99	7.57
Maximum depth to base of unit – vehicle mass up to 44 tonnes	n/a	5.74	7.30


- (1) For specific advice on cover depths for heavier loadings/HGV applications, contact Wavin Technical Design on 0844 856 5165.
- (2) 0.30m is minimum depth for AquaCell in landscaped applications. 0.5m cover is recommended in applications where ride-on mowers may be used. If construction plant is to be used on site, extra protection may be needed.
- (3) Allowable maximum depth to base of bottom layer of units is dependent on soil type, angle of shearing resistance, loadings, and groundwater level. The above depths are based on 38° angle of shearing resistance and no groundwater.

In trafficked applications it is recommended that the height of any tank should not exceed 2m (5 units). If you require a tank that exceeds this, please contact Wavin Technical Design for guidance:

T: 0800 038 0088 E: technical.design@wavin.co.uk

Minimum cover and maximum installation depths to base of units from ground level, in best soil conditions

This chart shows how deep each unit can be used for different applications in best soil conditions.

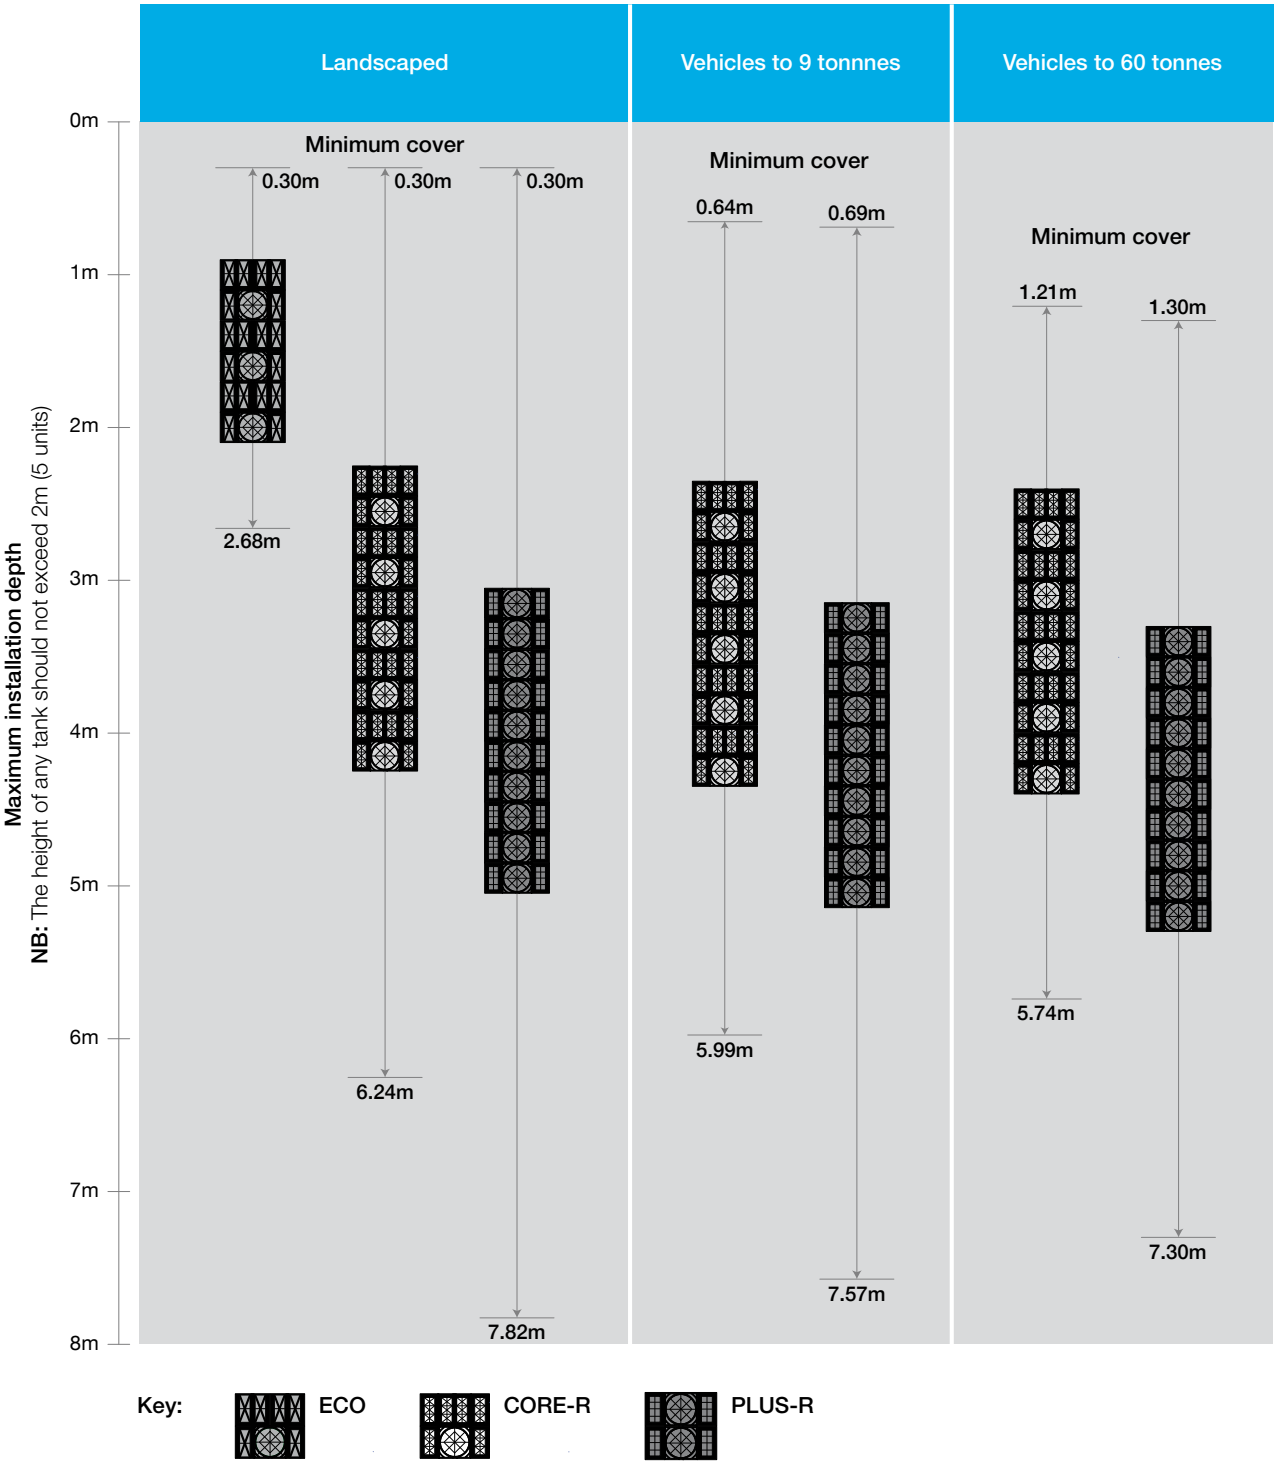

Note: The AquaCell units can also be used in combination with each other, please contact Wavin Technical Design for guidance.




Design guidance

Mix and match

Although all AquaCell units have identical dimensions, and a high nominal void ratio of 95%, they are manufactured to perform at a range of depths, dependent on soil type, angle of shearing resistance, loading and ground water levels. For optimum performance the units can be mixed and matched (in layers) to value engineer the most effective design (in cost and performance terms) for each installation. For example, in a landscaped application if you needed to install a tank or soakaway that is deeper than 2.7m, you could install layers of AquaCell Core-R underneath the AquaCell Eco. See below illustrations showing examples of how the AquaCell units can be mix and matched together. For advice on how to optimise a tank or soakaway design using more than one type of AquaCell please contact Wavin Technical Design.

Note: AquaCell Eco cannot be used directly with AquaCell Plus-R therefore there must be a layer of AquaCell Core-R between them.

Typical examples of mix and match with AquaCell

Landscaped	Cars	HGV's
		
Key:  ECO	 CORE-R	 PLUS-R

Brick bonding – for extra stability

When assembling a geocellular structure that comprises two or more layers, it is recommended that AquaCell units are placed in a 'brick-bonded' configuration for extra stability.


This helps minimise continuous vertical joints in the assembly, and gives the structure extra stability.

A significant advantage of AquaCell unit design is that brick bonding placement does not require extra connectors.

All three AquaCell units may be placed in this way, unless inspection channels and cleaning access are required using AquaCell Plus-R.

AquaCell Plus-R units incorporate integral inspection channels. These are designed for combined alignment to create viewing tunnels at the base of an assembled structure (see page 11).

Example of AquaCell being brick bonded

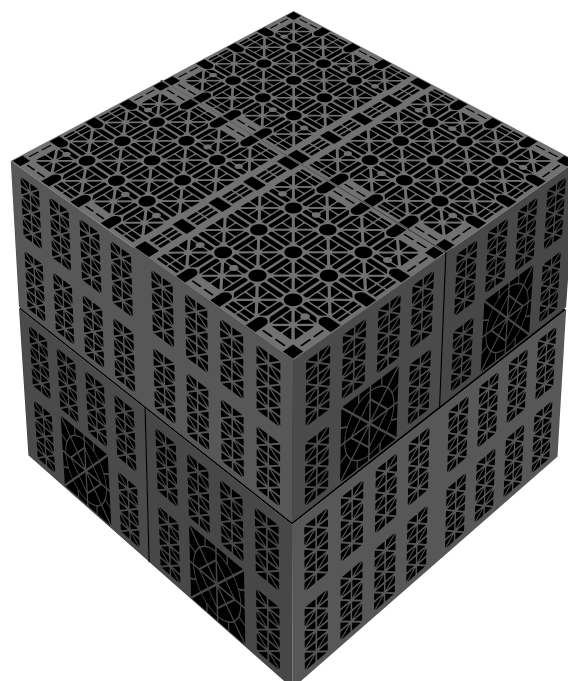

Installation guidance

AquaCell Core-R and Plus-R: Construction loads

Construction plant such as excavators can impose significant loads on any AquaCell unit. The following guidelines should be observed:

- ② Tracked excavators (not exceeding 21 tonnes weight) should be used to place fill over the AquaCell units when the geotextile or geomembrane wrapping has been completed
- ② At least 300mm of fill should be placed before the excavators or trucks delivering the backfill are allowed to traffic over the installed units
- ② Compaction plant used over the AquaCell units should not exceed 2300kg/metre width. This will allow the compaction of Type 1 sub-base in 150mm layers over the units in accordance with the Specification for Highways Works
- ② All other construction plant should be prevented from trafficking over the system once it is installed and surfacing completed, unless a site specific assessment demonstrates that it is acceptable
- ② In particular cranes should not be used over, or place their outriggers over the system

AquaCell Eco: Construction loads

As AquaCell Eco is designed for landscaped and non-loaded applications, certain precautions are recommended on site to prevent damage to the units through excess loading.

Manual assembly

Whilst assembling the tank, it may be necessary to walk on top of previously laid AquaCell units. Therefore care should be taken not to damage the edges of the units.

Backfilling

When backfilling AquaCell Eco installations:

- ② Machines placing the material must be located OFF the units
- ② Only light compaction should be applied to the material
- ② Backfill with suitable, stone-free, as-dug material
- ② First layer should be 300mm thick before using any compaction plant
- ② NO vibratory mechanism should be used for compacting this first layer
- ② Compaction plant must not exceed 2300kg per metre width

Construction traffic on site

Once backfilled, if construction plant (e.g. excavators or loaders) are likely to run over the installation, ensure that:

- ② MINIMUM protective cover should be 500mm well-compacted granular material
- ② Only tracked excavators can be used and MUST NOT weigh more than 14 tonnes.
- ② HGVs MUST NOT run over installed AquaCell Eco units

Manual assembly

All ancillaries and adaptors (see pages 34-37) can be used with either the AquaCell Eco, Core-R or Plus-R units, except the 225mm Flange Adaptor (6LB106) which must only be used with AquaCell Core-R or Plus-R.


The 150mm Flange Adaptor (6LB104) should only be used when constructing an air vent on the top surface of an AquaCell Eco unit. The adaptor should not be used to connect inlet pipes to the side of an Eco unit.

Installation

Typical soakaway installation method

Typical installation procedure

1. Excavate the trench to the required depth ensuring that the plan area is slightly greater than that of the AquaCell units.
2. Lay 100mm bed of coarse sand or non angular granular material, level and compact.
3. Lay the geotextile* over the base and up the sides of the trench.
4. Lay the AquaCell units parallel with each other. In multiple layer applications, wherever possible, continuous vertical joints should be avoided. AquaCell units can be laid in a 'brick bonded' formation (i.e. to overlap the joints below) – see page 16. For single layer applications use the AquaCell Clips and for multi layers use the AquaCell Clips and the AquaCell Shear Connectors (vertical rods).
5. Fix the Adaptors to the AquaCell units as required and connect pipework.
6. In order to prevent silt from entering the tank, clogging inlet pipework and reducing storage capacity, it is recommended that the Domestic Silt Trap (6LB300) or one of the standard Silt Traps (6LB600, 6LB625, 6LB630) is installed prior to the inlet pipework – see page 24 for installation guidelines.
7. Wrap and overlap the geotextile covering the entire AquaCell structure.
8. Lay 100mm of coarse sand or non angular granular material between the trench walls and the AquaCell structure and compact.
9. Lay 100mm of coarse sand or non angular granular material over the geotextile and compact.
10. Backfill with suitable material.
11. Rainwater from roof areas may discharge directly into the soakaway but rainwater from carparks must discharge through a catchpit manhole and/or a petrol interceptor.

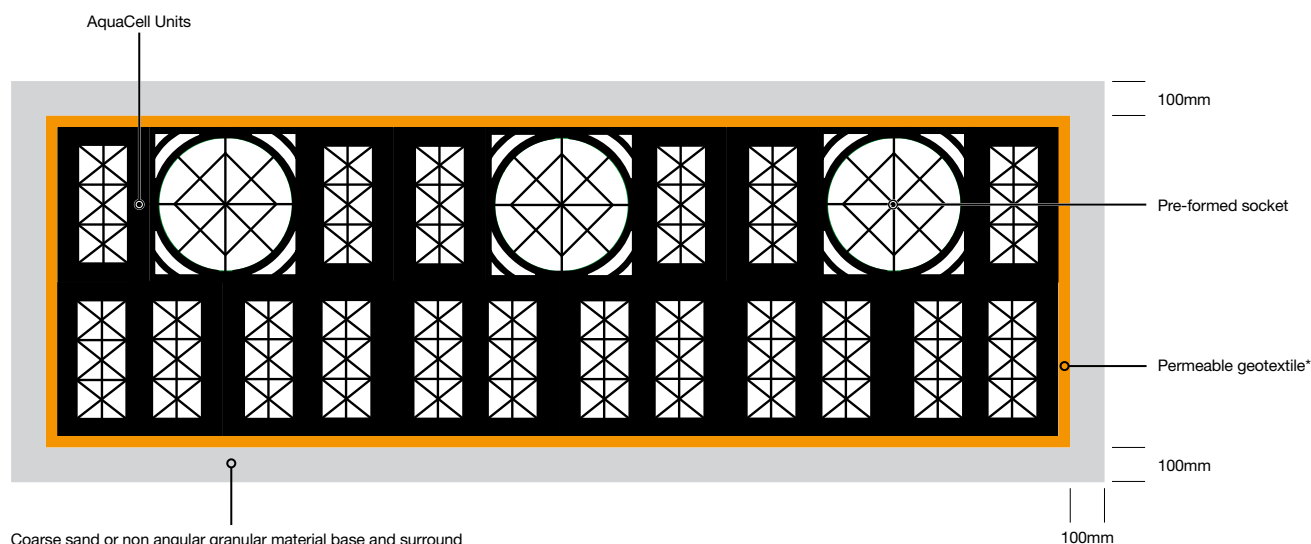

Example shows the use of AquaCell Eco. However, a soakaway can also be installed as shown using either of the other versions of AquaCell units (Core-R or Plus-R) as appropriate.


**The geotextile should be selected according to specific site conditions. Specialist advice should be sought if surrounding soil characteristics exhibit a high degree of fines/low infiltration capacity and/or there is a high risk of damage from ground contaminants.*

Typical storage tank installation method

Typical installation procedure

1. Excavate the trench to the required depth ensuring that the plan area is slightly greater than that of the AquaCell units.
2. Lay 100mm bed of coarse sand or non-angular granular material, level and compact.
3. Lay the geotextile¹ over the base and up the sides of the trench.
4. Lay the geomembrane² on top of the geotextile over the base and up the sides of the trench.
5. Lay the AquaCell units parallel with each other. In multiple layer applications, wherever possible, continuous vertical joints should be avoided. AquaCell units can be laid in a 'brick bonded' formation (i.e. to overlap the joints below) – see page 16. For single layer applications use the AquaCell Clips and for multi layers use the AquaCell Clips and the AquaCell Shear Connectors (vertical rods).
6. Wrap the geomembrane around the AquaCell structure and seal to manufacturers recommendations.*
7. If side connections into the AquaCell units is required, (other than the preformed socket), use the appropriate Flange Adaptor (6LB104 or 6LB106). Fix the flange adaptor to the unit using self-tapping screws. Drill a hole through the Flange Adaptor and connect the pipework. (6LB106 should not be used with AquaCell Eco).
8. In order to prevent silt from entering the tank, clogging inlet pipework and reducing storage capacity, it is recommended that the Domestic Silt Trap (6LB300) or the standard Silt Trap (6LB600) is installed prior to the inlet pipework – see page 20 for installation guidelines.
9. Wrap and overlap the geotextile covering the entire AquaCell structure, to protect the geomembrane.
10. Lay 100mm of coarse sand or non angular granular material between the trench walls and the AquaCell structure and compact.
11. Lay 100mm of coarse sand or non angular granular material over the geotextile/geomembrane and compact.
12. Backfill with suitable material.

NB: A storage tank must be vented, and it is recommended that one vent pipe, 110mm in diameter is provided per 7,500 square metres of impermeable catchment area on a site, see page 20 for design.

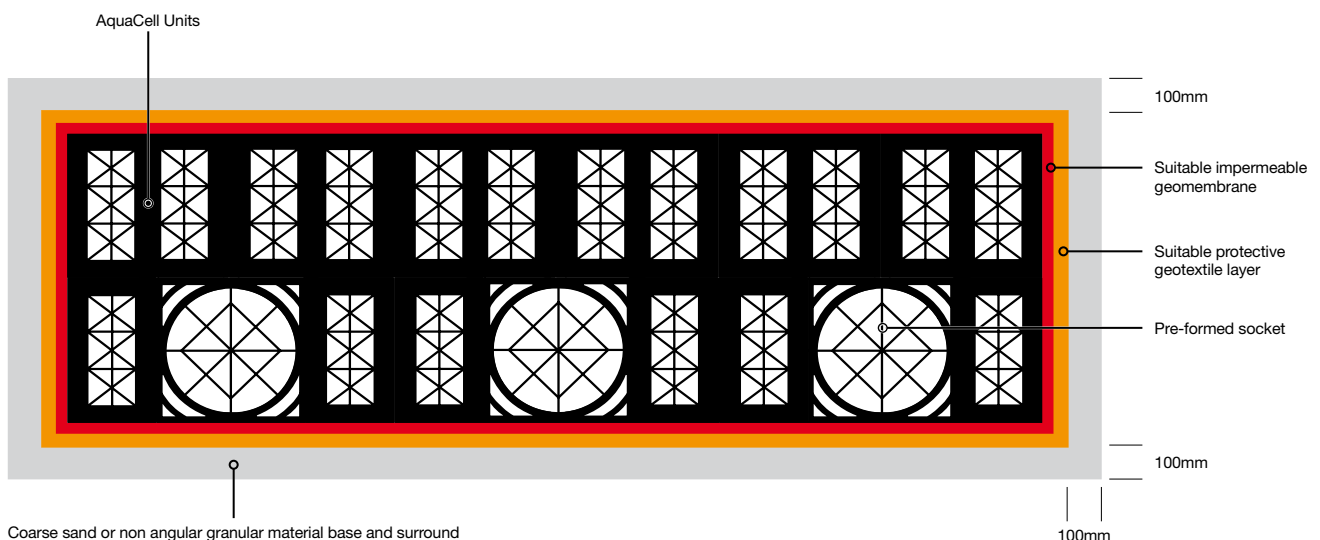

Example shows the use of AquaCell Core-R. However, a storage tank can also be installed as shown using any of the other versions of AquaCell units (Eco, Core-R or Plus-R) as appropriate.


1. For protective geotextiles CIRIA C753 – The SuDS Manual recommends a geotextile of at least 2mm thick and 300gsm.

2. The geomembrane should be designed to survive the rigours of construction, this is typically at least 0.5mm thick. Joints should be sealed using proprietary welding techniques.

Installation

Silt Trap and Air Vent termination

Silt Trap

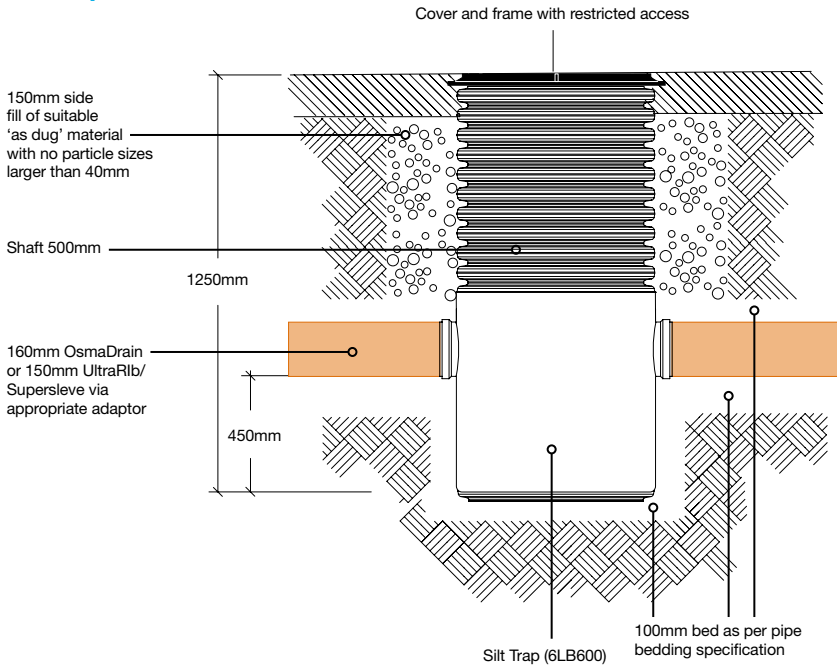


Typical installation procedure

1. Place the Silt Trap (6LB600, 6LB625, 6LB630) on a minimum of 100mm bed as per pipe bedding specification. Ensure that the trap is as close to the AquaCell unit as possible and in a suitable position to allow pipework connection.
2. Connect the relevant pipework in accordance with standard pipe installation guidelines.
3. Surround the sides of the Silt Trap with 150mm of 'as dug' material, with no particle sizes larger than 40mm.
4. Fit relevant cover and frame.

NOTE: When surrounded by a concrete plinth (150mm x 150mm) the 4D920 Cover and Frame can be used in situations with a loading of up to 50kN (5 tonne).


Typical Air Vent design

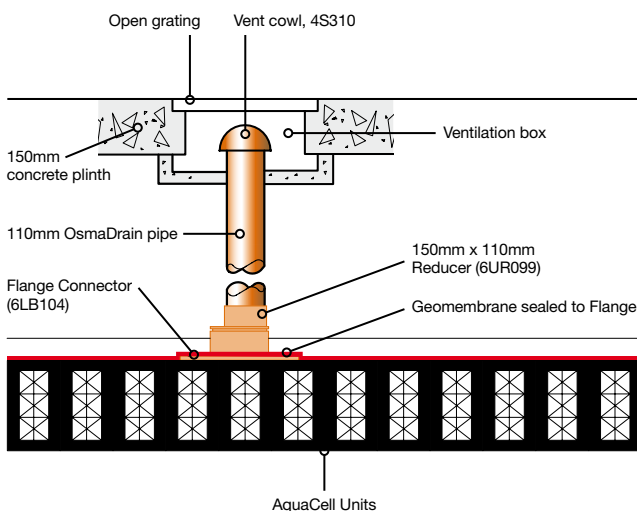

NOTE: It is recommended that all connections and air vent installations in storage applications (using geomembrane) are made using a Flange Adaptor.

Adhesive or double sided tape should be used between the geomembrane and the flange plate to ensure a watertight seal.

Typical Air Vent through manhole

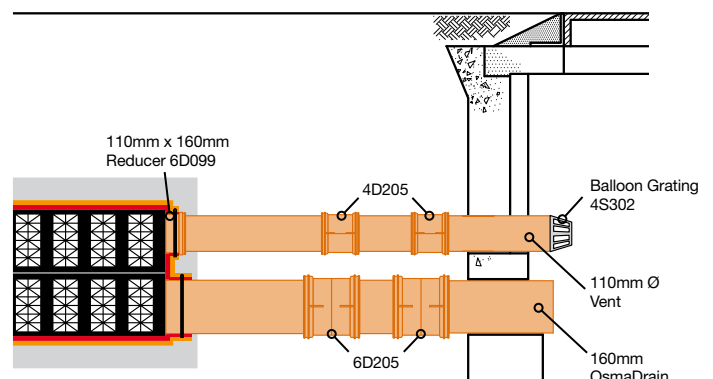


NOTE: It is recommended that one vent pipe, 110mm in diameter, is provided per 7,500 square meters of impermeable catchment area on a site. Please contact Wavin Technical Design for further details.

Connections

Top connection for Air Vent

Connect into the top of the AquaCell unit, using Flange Adaptor.

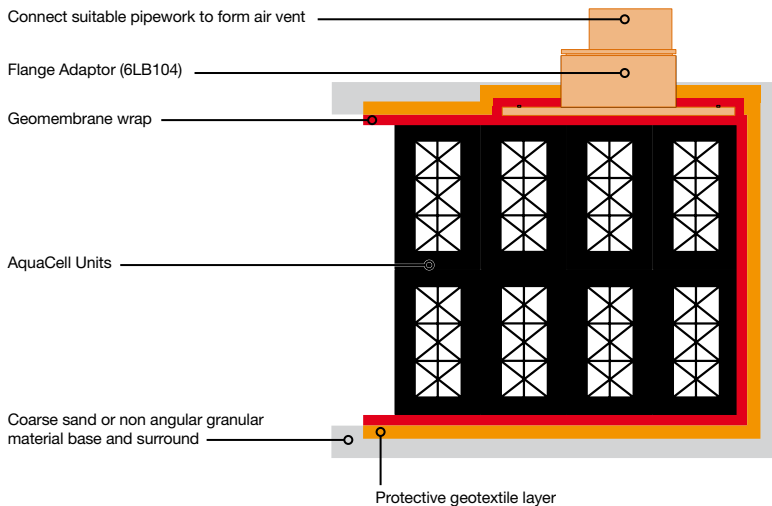


Typical installation procedure

1. Fix Flange Adaptor to the AquaCell unit with self tapping screws.
2. Cut through the geomembrane.
3. Insert pipework into Flange Adaptor to form air vent.

Side connection for Air Vent


Connect into the side of the AquaCell tank unit using standard Reducer.

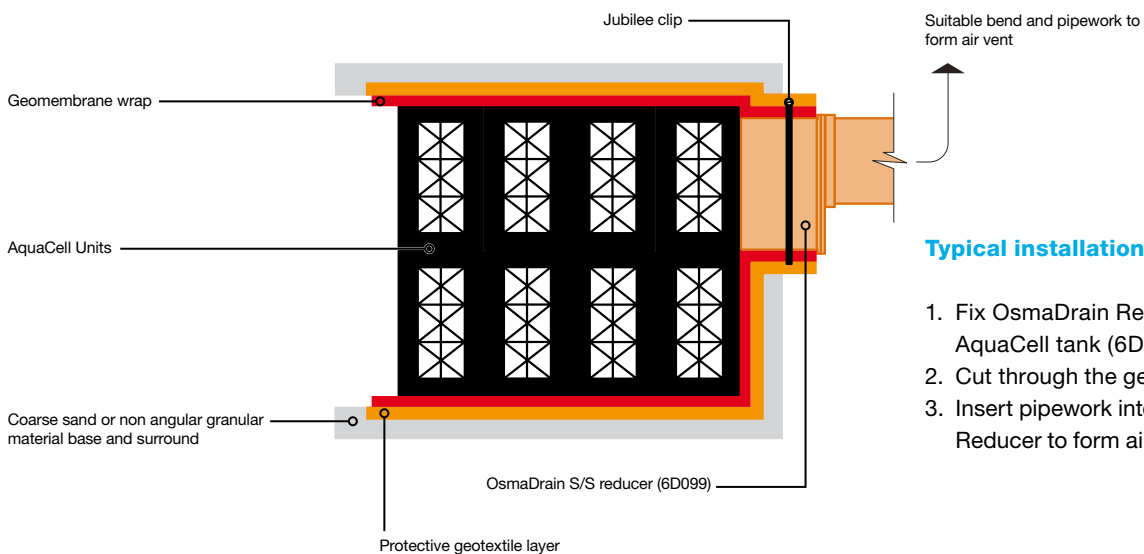

Typical installation procedure

1. Fix OsmaDrain Reducer to the AquaCell tank (6D099).
2. Cut through the geomembrane.
3. Insert pipework into OsmaDrain Reducer to form air vent.

Connections

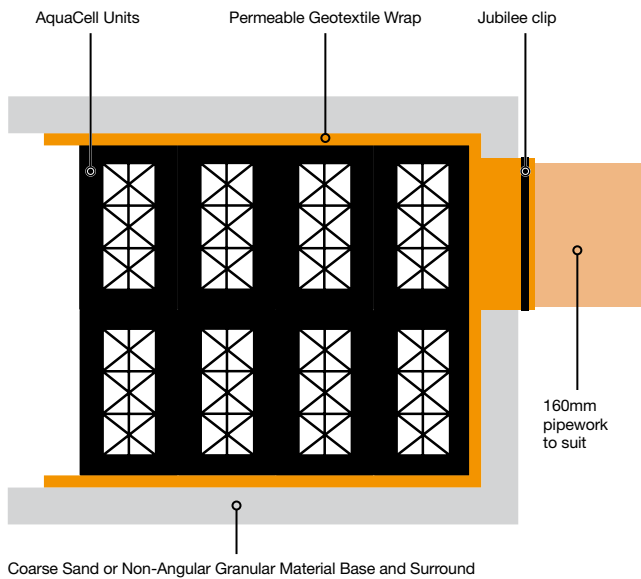


Connections to AquaCell units

Connection for soakaway application using either the pre-formed socket (as shown below) or standard adaptors into pre-formed socket*.

*NOTE: For pipework other than 160mm OsmaDrain, these adaptors can be used to connect to the following:

- ④ 6TW141: TwinWall S/S Adaptor connects to 150mm TwinWall
- ④ 6D099: OsmaDrain Adaptor connects to 110mm OsmaDrain
- ④ 6UR141: UltraRib S/S Adaptor connects to 150mm UltraRib
- ④ SA15/2: Double Spigot Adaptor connects 160mm OsmaDrain to 150mm Supersleve Clay

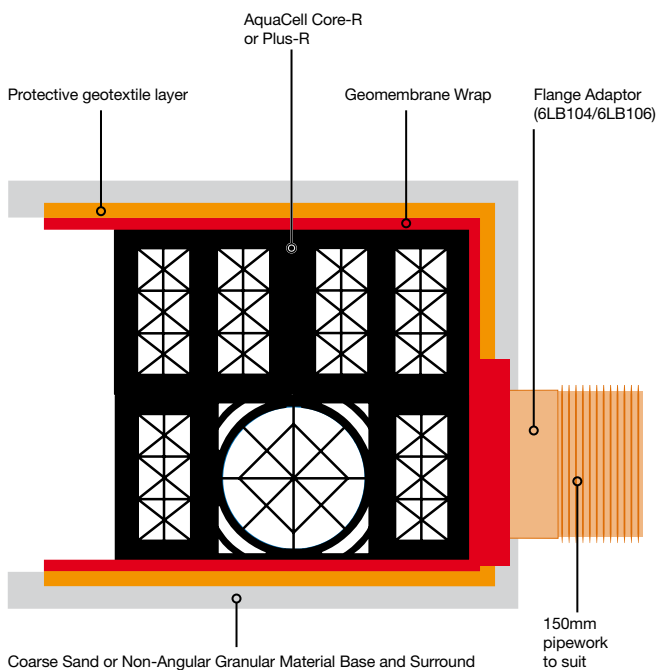

Connection for storage application using Flange Adaptor at points other than pre-formed socket, (for AquaCell Core-R or Plus-R).

Installation procedure

1. Fix Flange Adaptor to the AquaCell unit with self tapping screws.
2. Cut through the geomembrane.
3. Insert pipework into Flange Adaptor.

*NOTE: When using the 6LB104: For pipework other than 150mm UltraRib these adaptors can be used to connect to the following:

- ④ 6UR099: S/S Level Invert Reducer to 110mm OsmaDrain
- ④ 6UR143: UltraRib 150mm Spigot Adaptor connects to 160mm OsmaDrain
- ④ 6TW145: UltraRib 150mm Spigot Adaptor connects to 150mm Twinwall
- ④ TA/2: UltraRib 150mm Spigot Adaptor connects to 150mm Supersleve Clay

When using the 6LB106: For pipework other than 225mm UltraRib these adaptors can be used to connect to the following:


- ④ 9TW145: UltraRib 225mm Spigot Adaptor connects to 225mm Twinwall
- ④ TA/4: UltraRib 225mm Spigot Adaptor connects to 225mm Supersleve Clay

Connection configurations

The connections shown here in schematic form, are the typical options used to connect AquaCell units to control chambers. They provide a controlled feed into and out of the AquaCell units, and are used for either infiltration or attenuation schemes.


Manifold connection

Using standard pipes and fittings

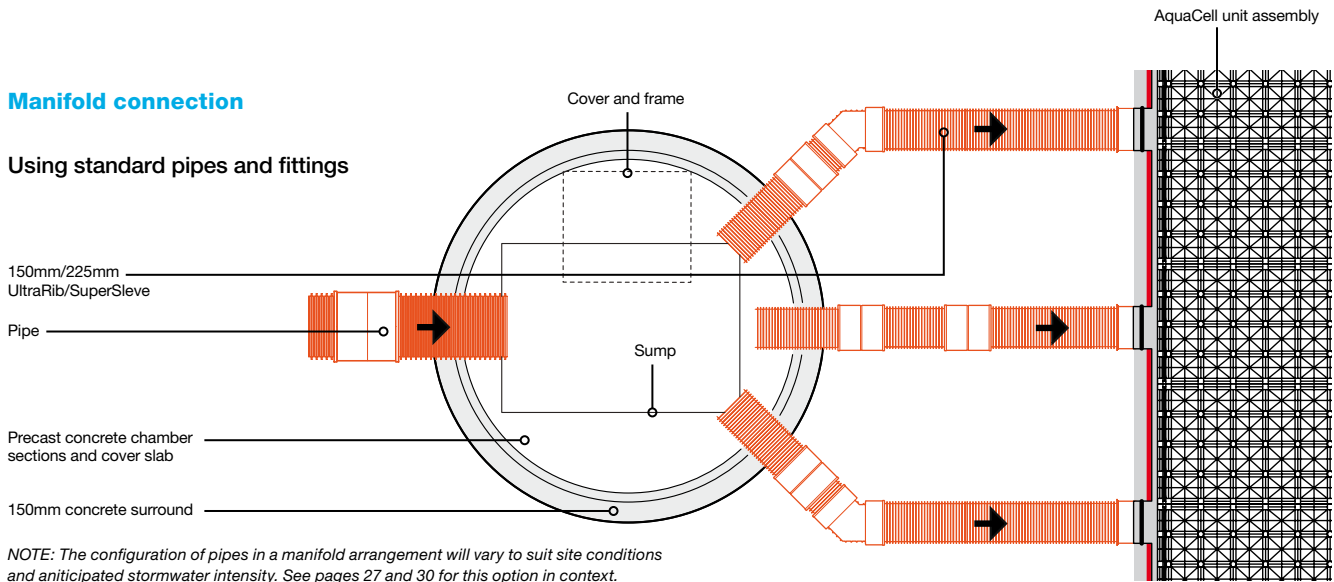


Box connection

Using AquaCell units for fast water transfer

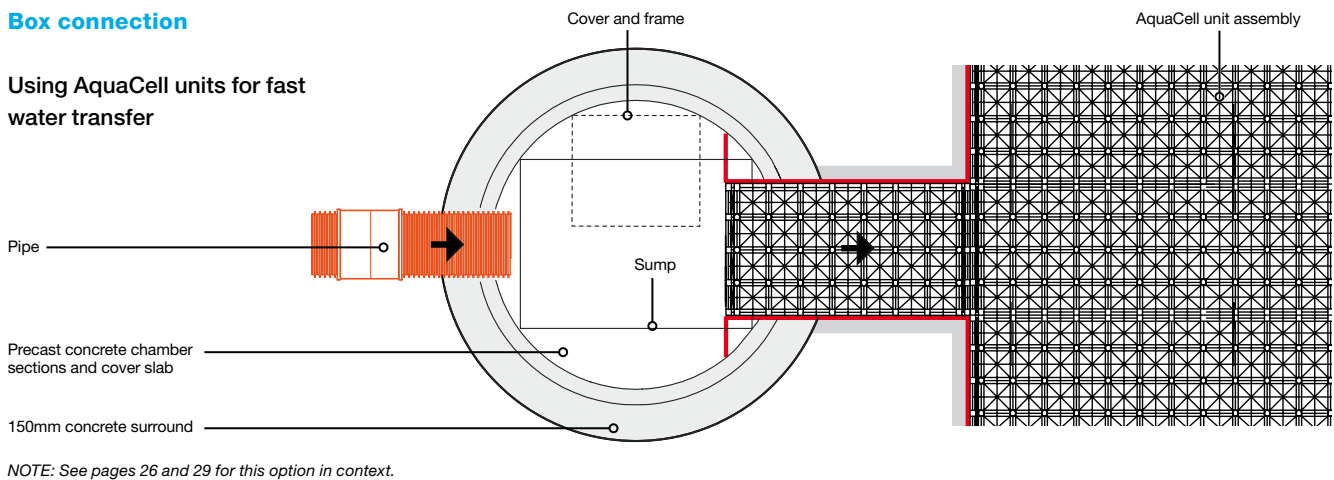

Central pipe connection


Using standard perforated Wavin TwinWall pipe and fittings

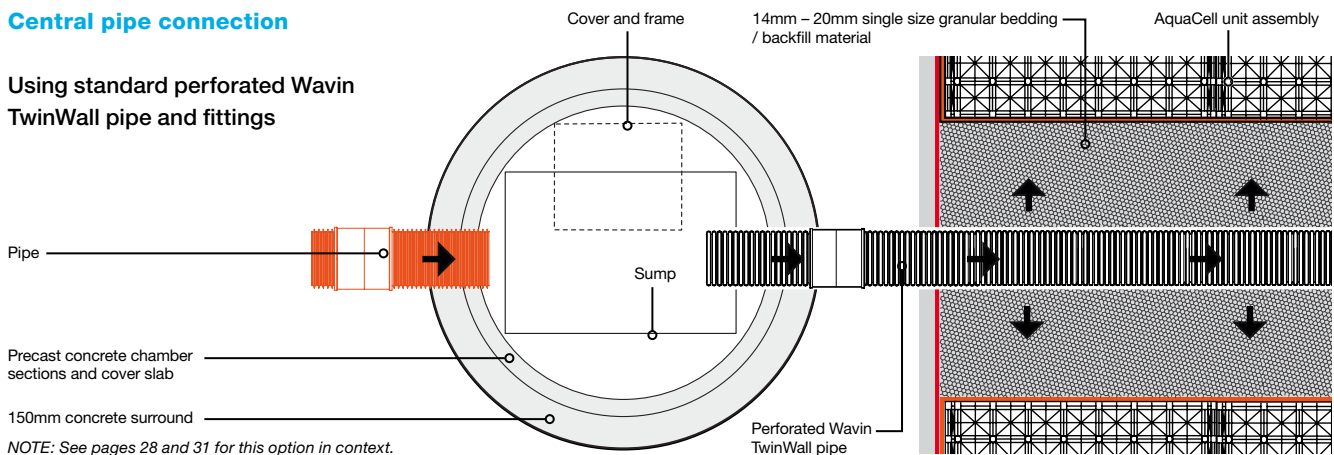


Soakaways

Soakaway – non-traffic loading

Soakaway

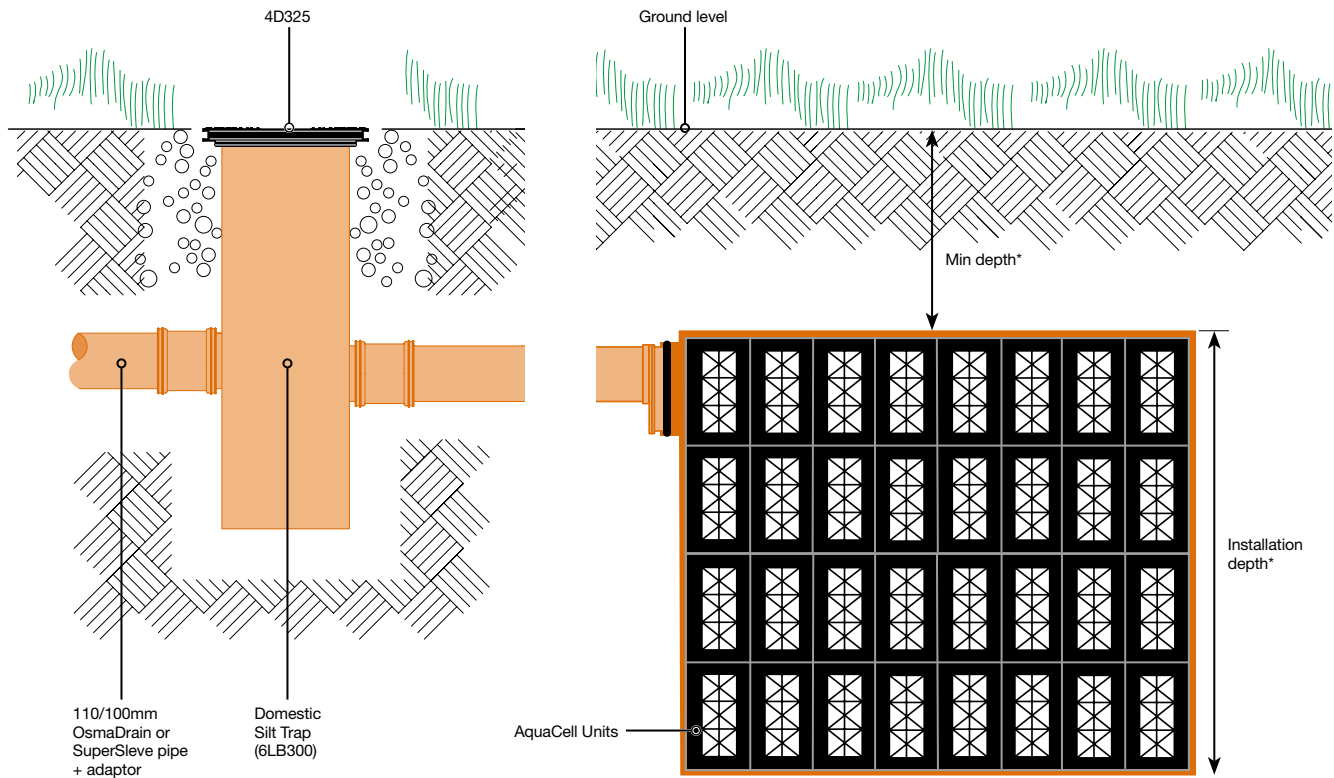


Trench soakaway

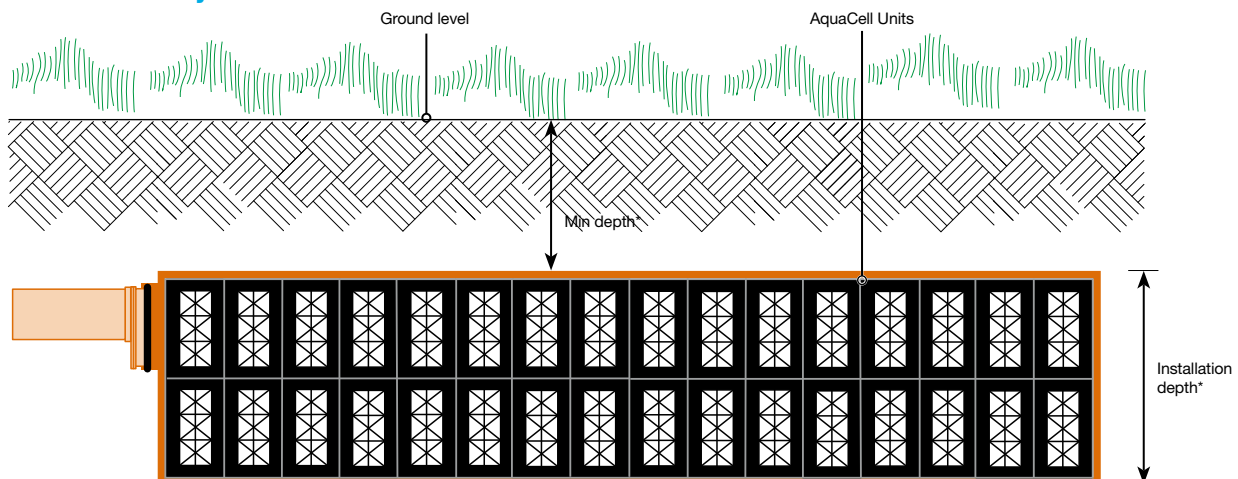


Notes

1. Soakaways should be sited at least 5m away from the building (Ref BS EN 752-4).
 2. The exact size and shape of the soakaways are to be determined once all the necessary calculations have been produced.
- *For information regarding cover depths and installation depths, see page 15.

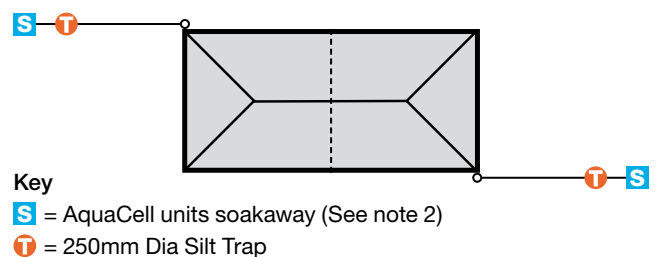

Soakaway – traffic loading


Soakaway

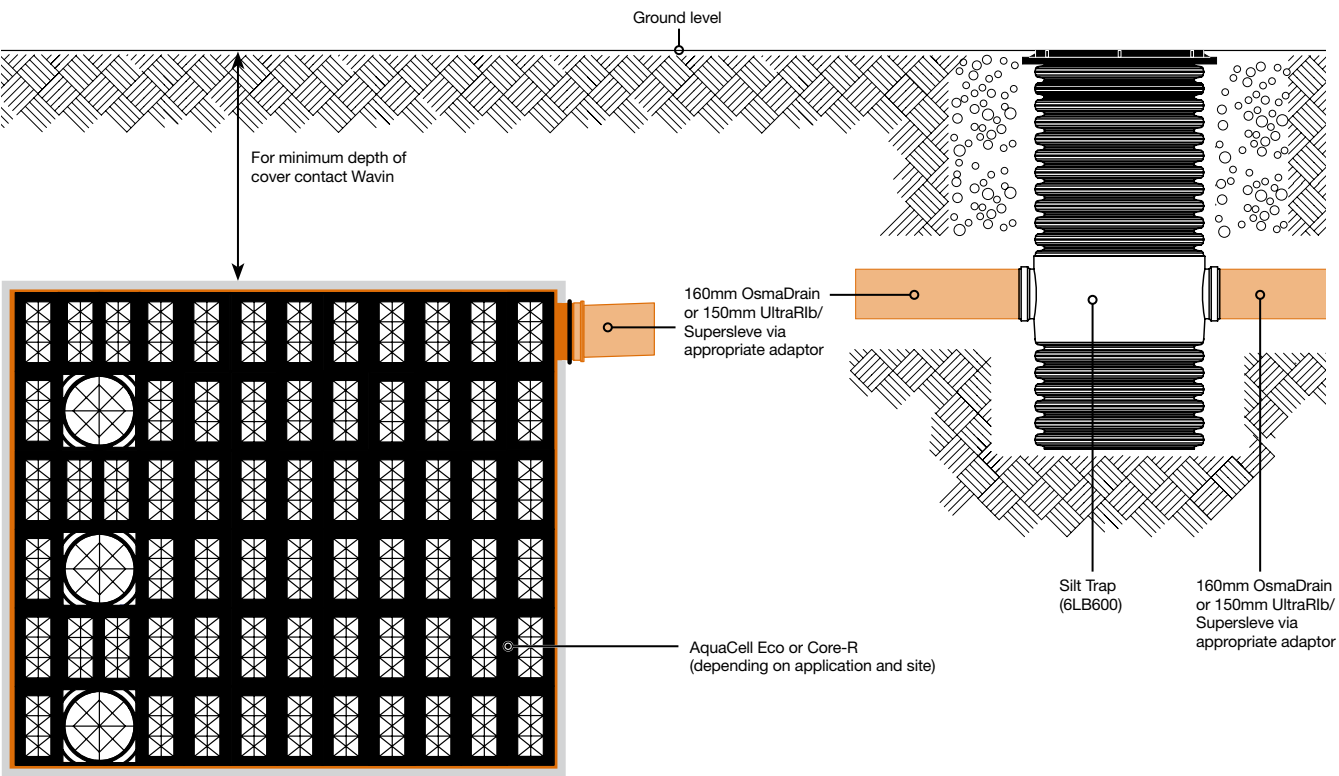


On-line storage

On-line storage – box feed


Long section

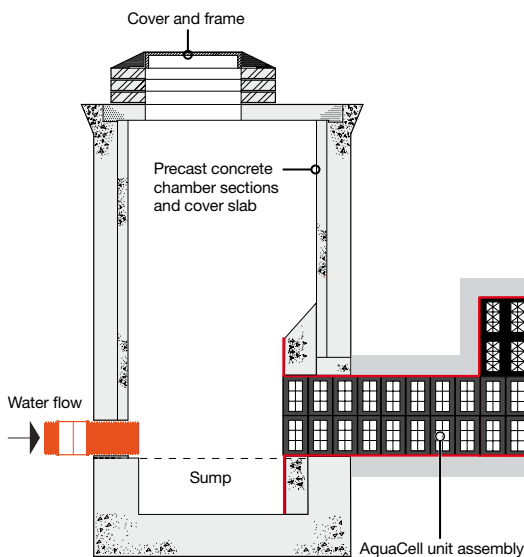


Typical vent detail

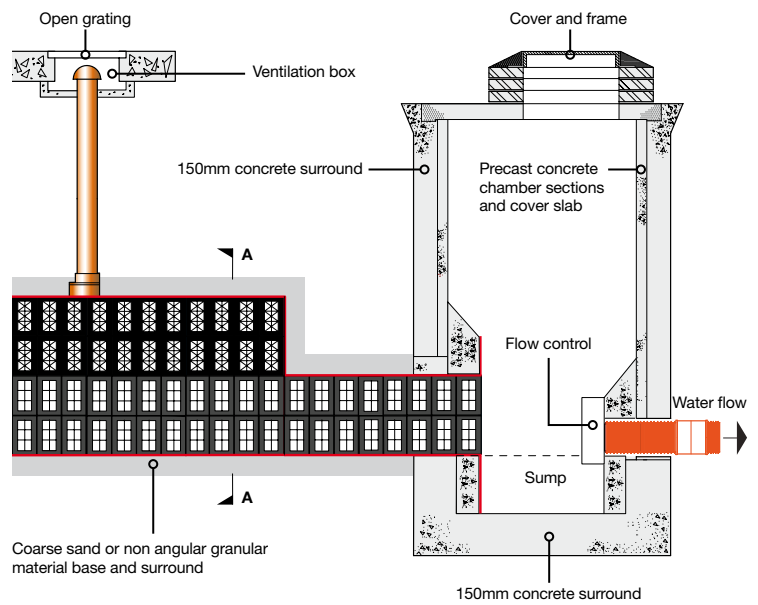

Plan

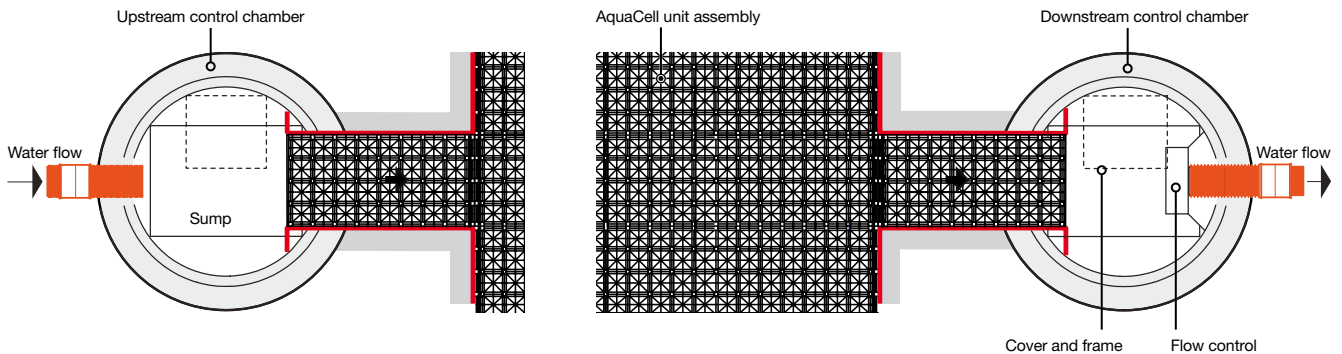

Cross section A-A

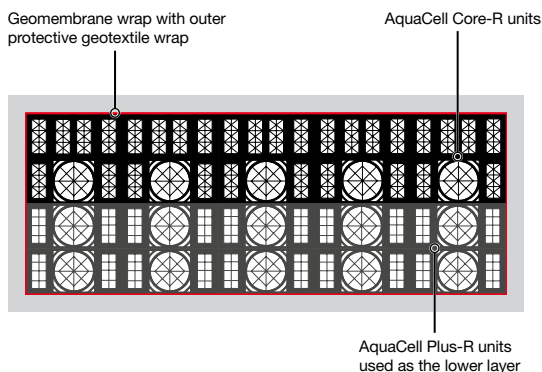


What happens to the water?


1. The water level in the upstream control chamber rises.
2. Then, during a storm event, the AquaCell storage assembly quickly fills with water via the AquaCell feed connection.
3. After storm event, water flows back out of the AquaCell storage assembly, finding its own level, and into the downstream control chamber.
4. The water then flows through the vortex flow control valve.

On-line storage – manifold feed



Long section

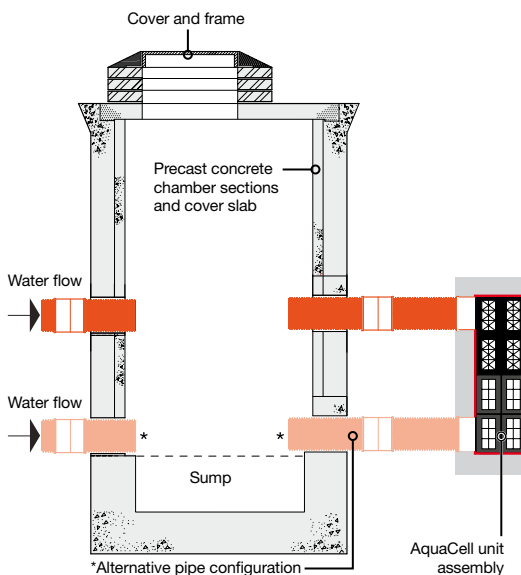


Typical vent detail

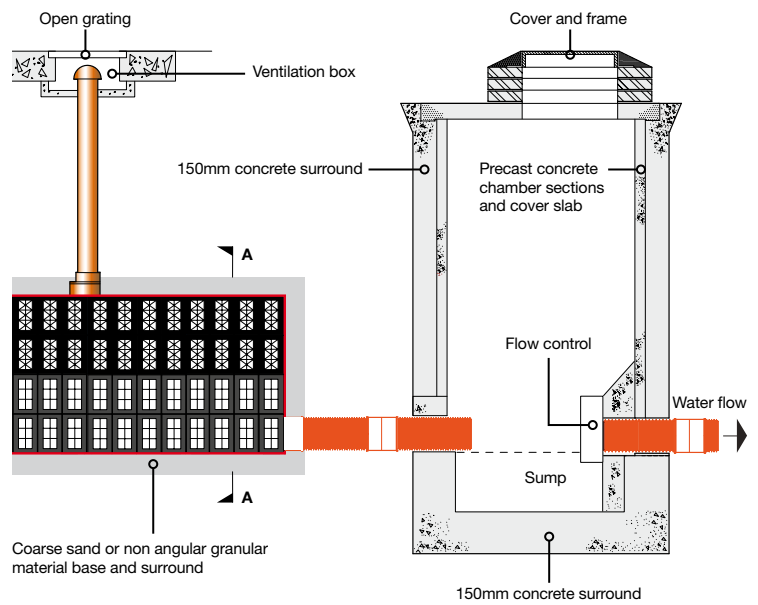

Plan

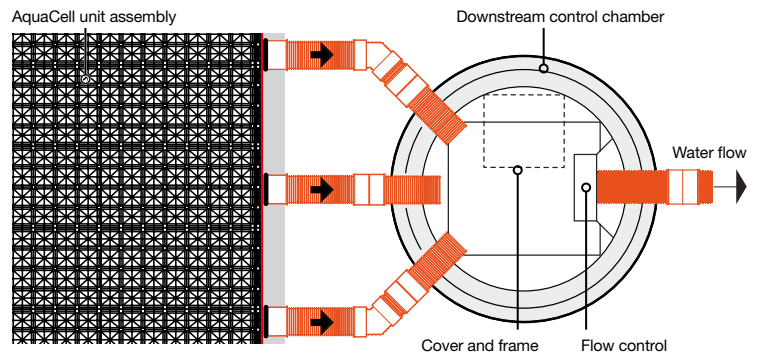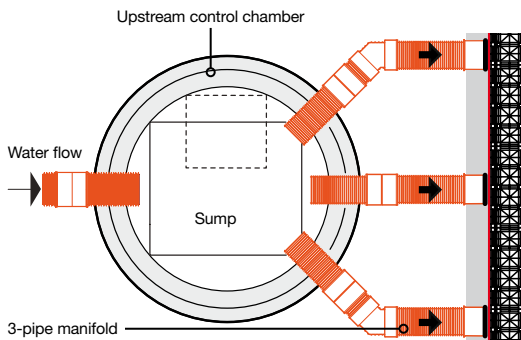

Cross section A-A

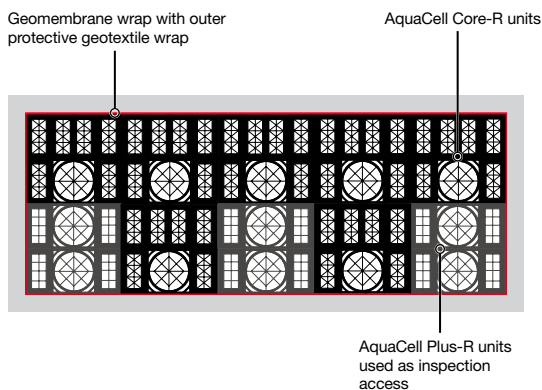


What happens to the water?

1. The water level in the upstream control chamber rises.
2. During a storm event, the AquaCell storage assembly fills with water via the manifold feed connection.
3. After storm event, water flows back out of the AquaCell storage assembly, finding its own level, and into the downstream control chamber.
4. The water then flows through the vortex flow control valve.


On-line storage

On-line storage – central pipe feed


Long section

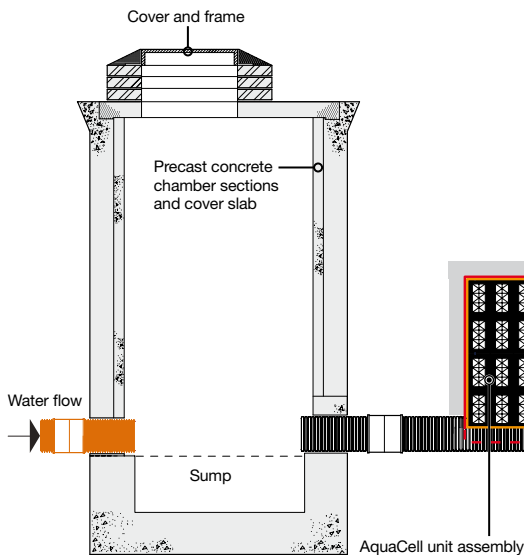


Typical vent detail

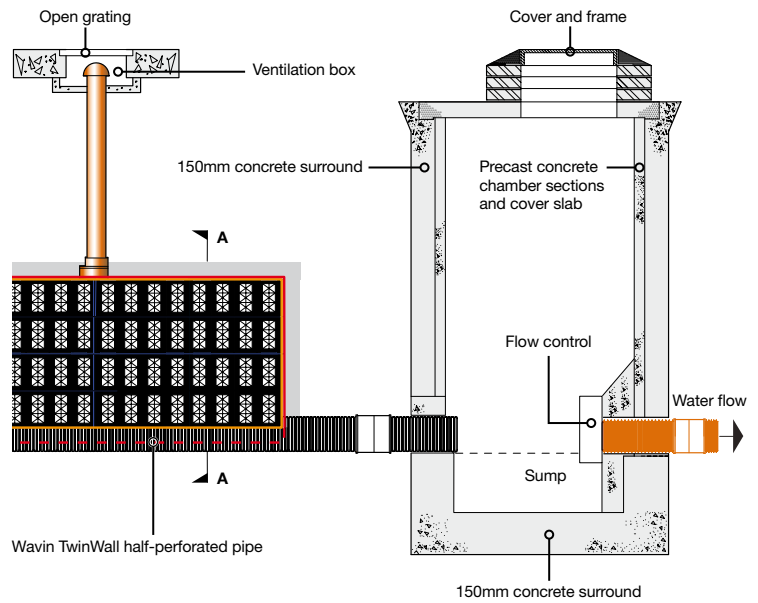

Plan

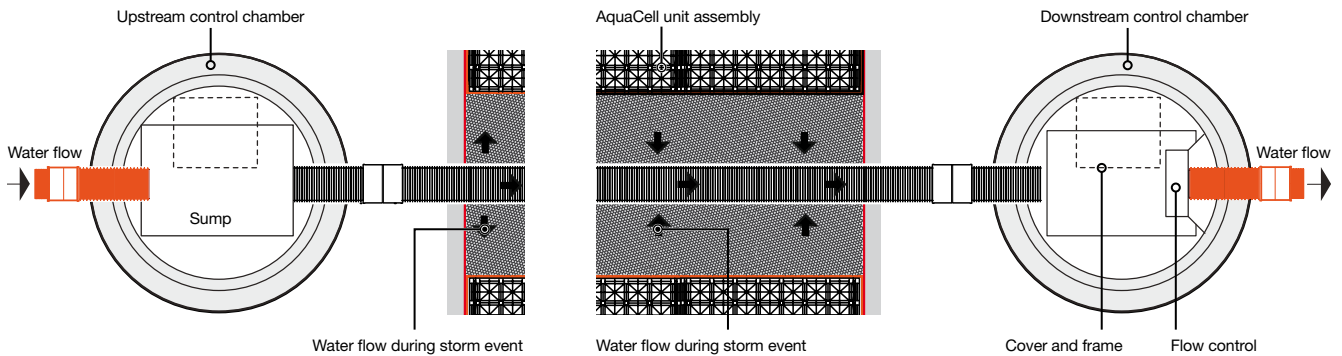

Cross section A-A

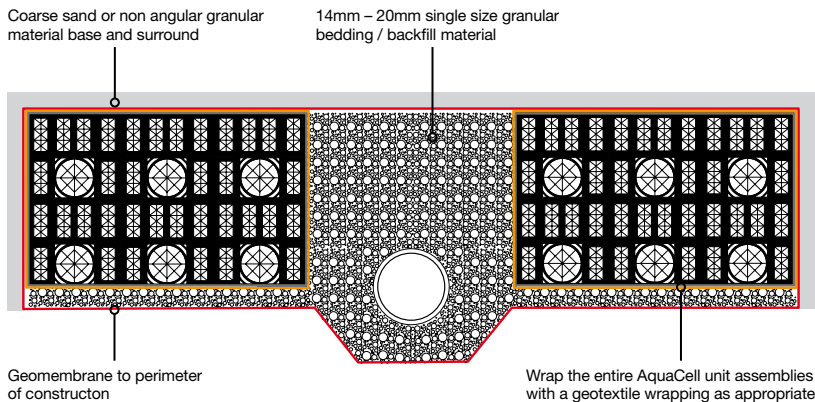


What happens to the water?

1. The water level in the upstream control chamber rises.
2. AquaCell storage assemblies fill with water via the central pipe connection and percolate's through the granular bedding material.
3. After storm event, water flows back out of the AquaCell storage assemblies, finding its own level, and into the downstream control chamber.
4. The water then flows through the vortex flow control valve.


Off-line storage

Off-line storage – box feed



Long section

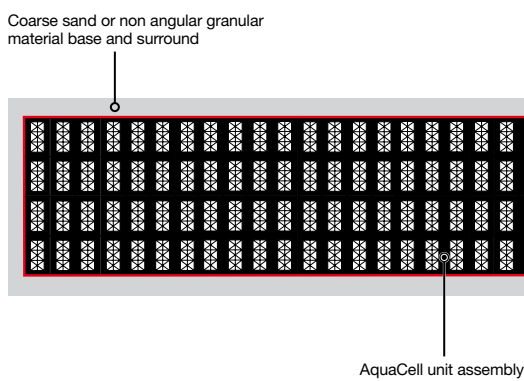


Typical vent detail

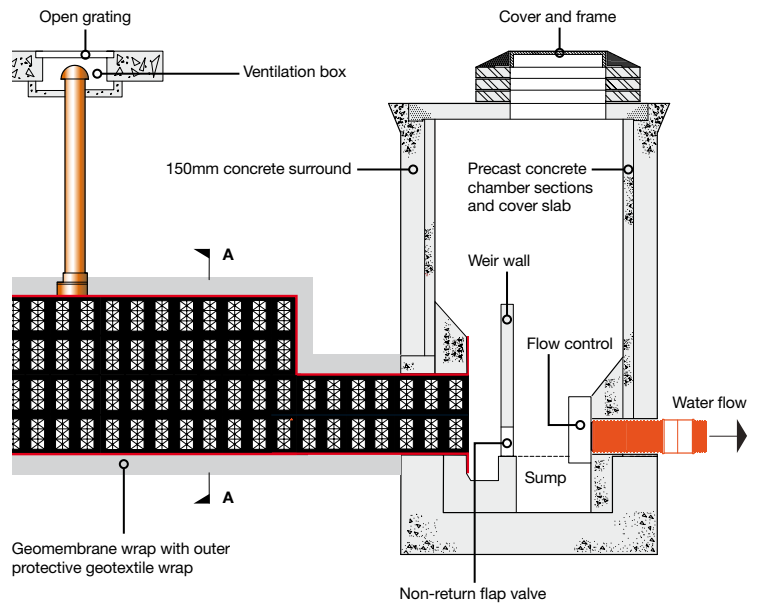

Plan

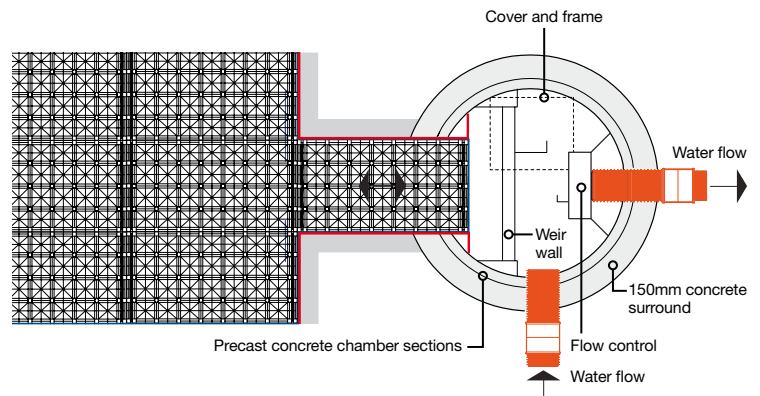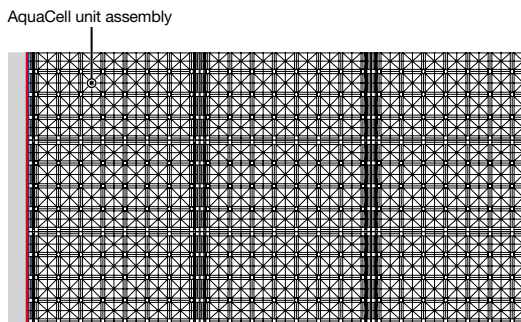

Cross section A-A

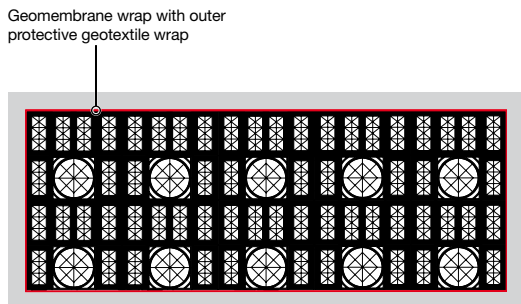


What happens to the water?

1. Control chamber fills with water, up to the top of the weir wall.
2. The water overflows the weir wall and enters the AquaCell storage assembly via the AquaCell connection.
3. The AquaCell storage assembly fills with water.
4. After storm event, water flows back out of the AquaCell storage assembly, finding its own level, and through the non-return flap valve at the bottom of the weir wall.
5. The water then flows through the vortex flow control valve.


Off-line storage

Off-line storage – manifold feed



Long section

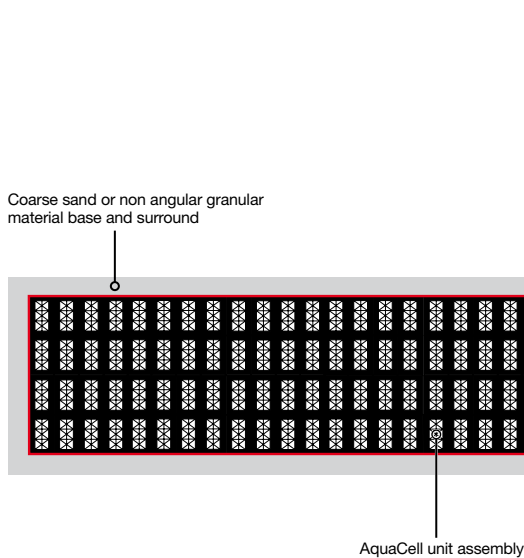


Typical vent detail

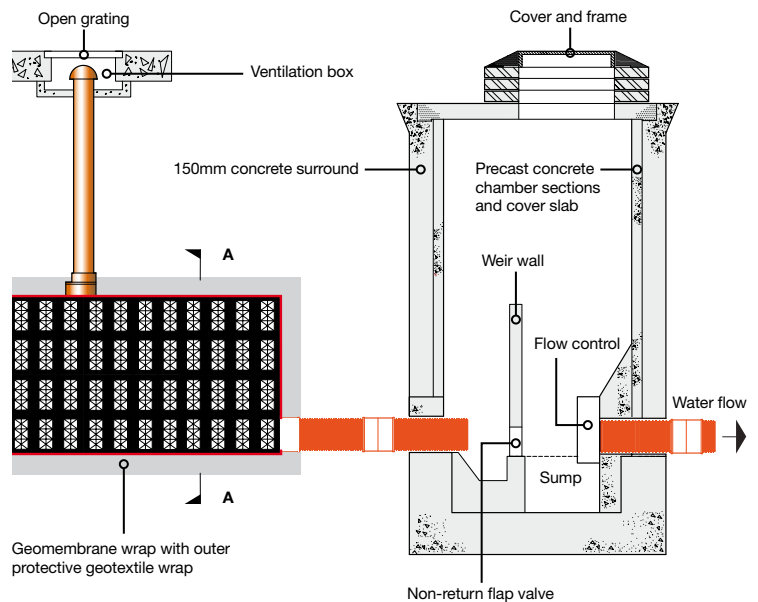

Plan

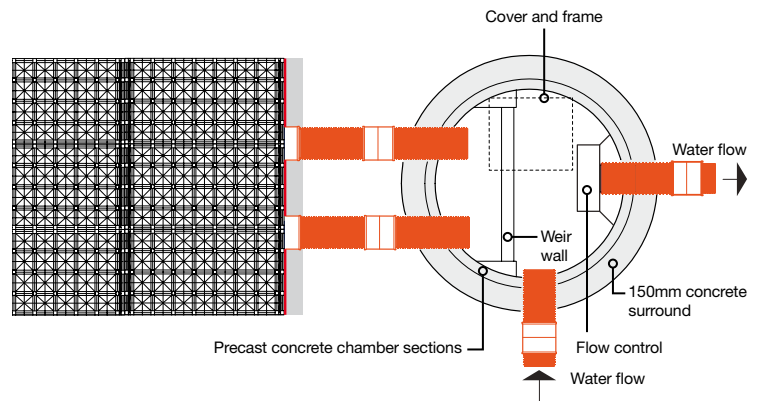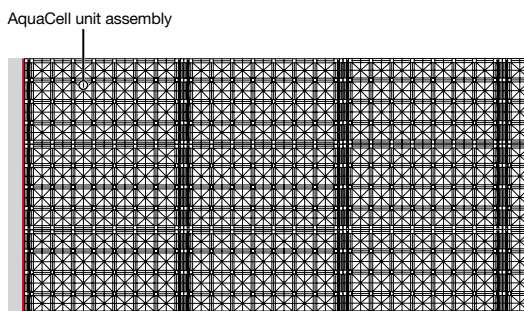

Cross section A-A

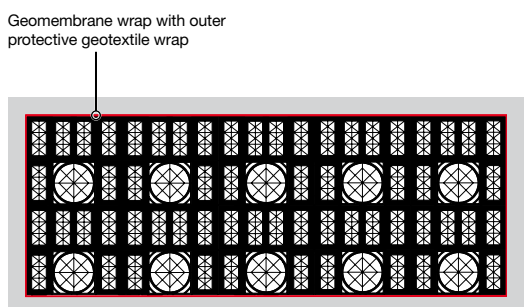


What happens to the water?


1. Control chamber fills with water, up to the top of the weir wall.
2. The water overflows the weir wall and enters the AquaCell storage assembly via the manifold connection.
3. The AquaCell storage assembly fills with water.
4. After storm event, water flows back out of the AquaCell storage assembly, finding its own level, and through the non-return flap valve at the bottom of the weir wall.
5. The water then flows through the vortex flow control valve.

Off-line storage – central pipe feed


Long section

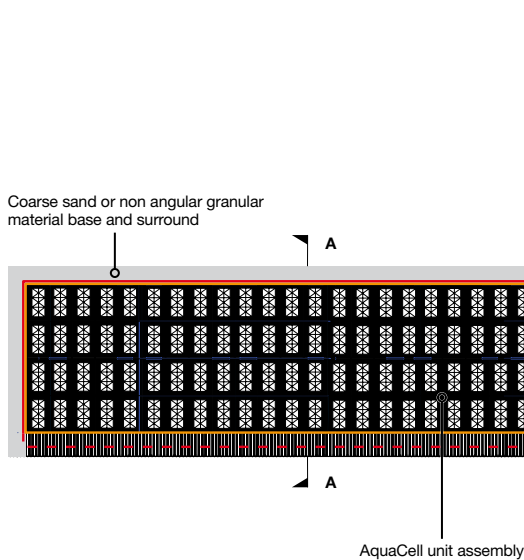


Typical vent detail

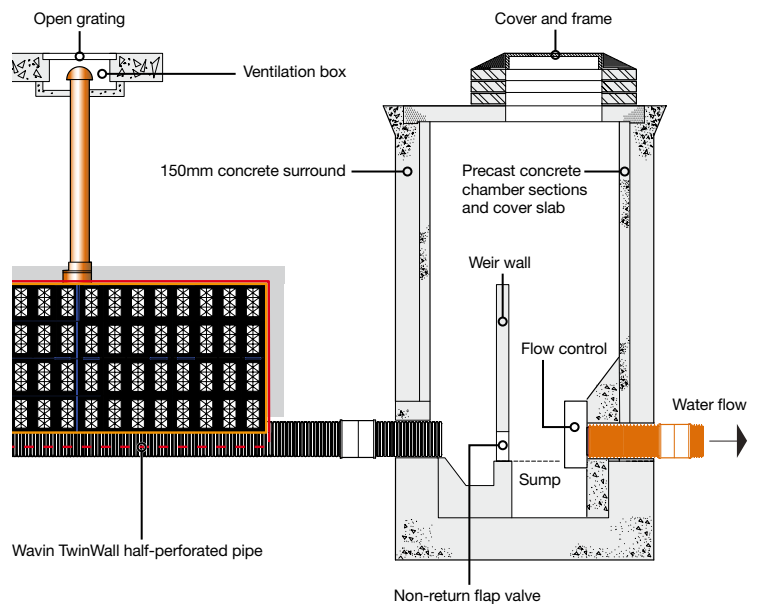

Plan

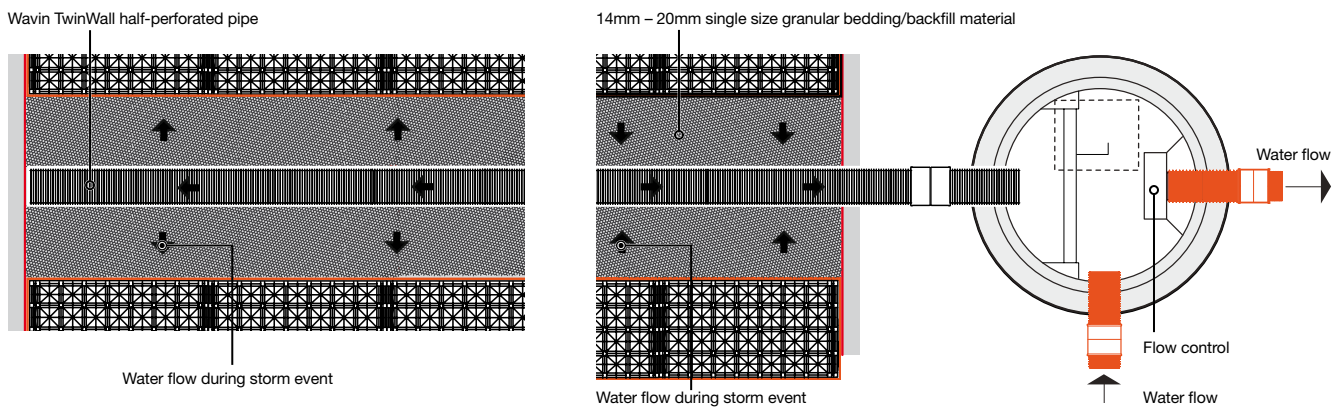

Cross section A-A

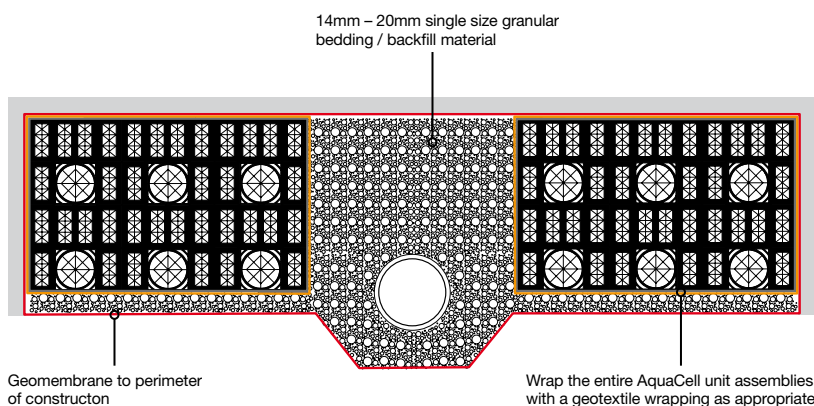


What happens to the water?

1. Control chamber fills with water, up to the top of the weir wall.
2. The water overflows the weir wall and enters the AquaCell storage assemblies via the central pipe connection and percolate through the granular bedding material.
3. The AquaCell storage assembly fills with water.
4. After storm event, water flows back out of the AquaCell storage assemblies, finding its own level, and through the non-return flap valve at the bottom of the weir wall.
5. The water then flows through the vortex flow control valve

Soakaway with Silt Trap

Soakaway or storage tank – with Silt Trap

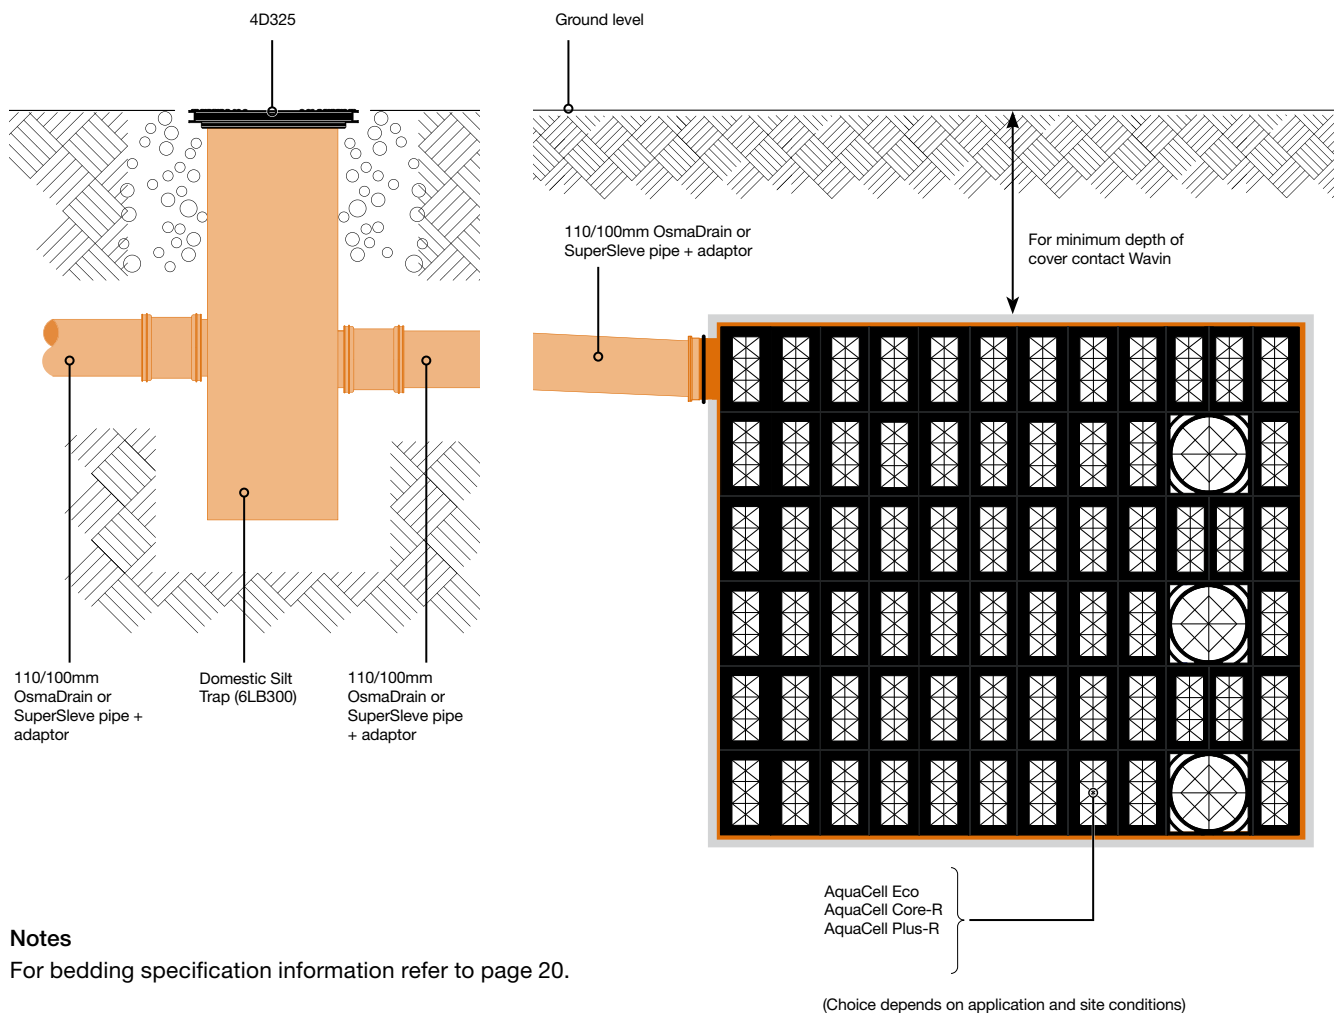

Notes

For bedding specification information refer to page 20.

The silt trap can be used in conjunction with a soakaway (as shown) or a storage tank.

Wavin stormwater management

To achieve optimum stormwater management

The Wavin Stormwater Management System represents a combination of specialist expertise and technology from Wavin. This is specifically focused on achieving the optimum solution for each project requiring effective and sustainable management of stormwater.

Such a solution may be entirely based on a tailored combination of our engineered systems.

In other cases, Wavin Stormwater Systems can be integrated with 'soft' SuDS techniques, such as ponds and swales, to help achieve the optimal solution.

Other Wavin stormwater systems

Channel drainage

Environmentally-friendly polyester concrete systems to cover all EN 1433 load classes. With outstanding chemical resistance and low water absorption:

- ⌚ Medium duty range for applications up to C250
- ⌚ Heavy duty range for D400 / F900 application

Plastic pervious paving

High performance, plastic pervious paving system, for use in all types of Sustainable Drainage systems (SuDS).

- ⌚ AquaGrid 50 – for use in landscape projects
- ⌚ AquaGrid 75 – for use in car parking areas

Flow control valves

The Wavin+Mosbaek range of vortex flow control valves are manufactured from stainless steel and are custom-built to meet exact site requirements:

- ⌚ Tornado, Hurricane and Typhoon stainless steel flow control valves with no moving parts of power needs

Q-Bic Plus

As part of an effective SuDS solution, no other attenuation tank ticks as many boxes as Q-Bic Plus.

Designed from the ground up to be compliant with Sewers for Adoption 8, it is easy to handle, fast and simple to install, and carries BBA approval. The high void design makes it the most accessible, inspectable and cleanable attenuation tank on the market, scoring with specifiers for its design flexibility whatever the soil type, available area or load.

Anti-flood valves

- ⌚ Anti-Flood Valves that comply with EN 13546-1, and Part H1– Sections 2.8-2.12 of Building Regulations

Below ground water transportation

Wavin Stormwater installations can draw from an extensive choice of plastic and clay pipe systems, including:

- ⌚ OsmaDrain solid wall PVC-U pipe system
- ⌚ Structured wall plastic UltraRib and TwinWall pipe systems
- ⌚ SuperSleeve clay pipe systems

Other options include perforated pipe for land drainage: WavinCoil plastic and HepLine clay – and a full range of Wavin Non-Entry Inspection Chambers.

The Wavin stormwater service

Precision and performance

The Wavin Technical team are ready to contribute to any stormwater management project.

This may be at the very earliest stage – or when initial plans have already been developed. There are no pre-conditions with regards to you requesting Wavin to become involved.

We are ready to:


- ⌚ Originate project design
- ⌚ Comment on an existing design
- ⌚ Help validate a specification – or, where we see an opportunity to do so, to suggest how it may be enhanced
- ⌚ Check, clarify and confirm maximum cost-efficiency, performance capability and regulatory compliance

This involvement is a core part of the Wavin principle. It extends beyond the systems and components.

To discuss your stormwater management project, call 0800 038 0088 or email technical.design@wavin.co.uk.

Supplementary items


Silt Trap – domestic – for non loaded applications



- Domestic Silt Trap**
- 250mm x 750mm depth
 - With 110mm diameter inlet and outlet spigots
 - For use with the 4D325 cover and frame

Material: PVC-U


Nominal Size (mm)	Part Number	Dimensions (mm)			
		A	B	C	D
–	6LB300	250	750	330	305



- Extension Piece for 6LB300**
- 250mm x 500mm depth (effective length = 335mm)

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)	
		A	B
–	6LB301	500	165




- Silt Trap Bucket for 6LB300**
- 200mm x 210mm depth

Material: PVC-U/Polypropylene

Nominal Size (mm)	Part Number	Dimensions (mm)			
		A	B	C	D
–	6LB302	597	208	114	127.5

Silt Trap – trafficked




- Silt Trap**
- 500mm diameter x 1.25m depth

Material: Polypropylene

Nominal Size (mm)	Part Number	Dimensions (mm)		
		A	B	C
160mm	6LB600	500	1250	450
225mm	6LB625	500	1250	450
300mm	6LB630	500	1250	450

Ancillaries




S/S Adaptor

- 6UR socket x 160mm BS EN 1401 spigot

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)		
		A	B	C
150	6UR141	180	84	160




S/S Level Invert Reducer

- To 110mm OsmaDrain spigot

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)		
		A	B	C
150 x 110	6UR099	115	95	111




S/S Adaptor

- 6TW socket x 160mm BS EN 1401 spigot

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)		
		A	B	C
150	6TW141	180	84	160



Double Ended Spigot Adaptor


- For connecting SuperSleeve pipes to OsmaDrain pipes

Material: Polypropylene

Nominal Size (mm)	Part Number	Dimensions (mm)		
		A		
100	SA15/1	65		
150	SA15/2	80		

Supplementary items

Ancillaries



S/S Level Invert Reducer

- To 110 OsmaDrain

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)	
		A	B
160	6D099	127	70





P/E Adaptor

- 160mm spigot connection

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)
		A
160	4D916	325



Flange Adaptor

- 6UR socket for connection of UltraRib to infiltration unit at positions other than preformed opening
- 9UR socket for connection of UltraRib to infiltration unit (can only be used with AquaCell Core-R and Plus-R)

Material: PVC-U

Nominal Size (mm)	Part Number	Dimensions (mm)			
		A	B	C	D
150	6LB104	300	300	100	160.3
225	6LB106	500	400	120	226.5

Spares



AquaCell Clip

- For jointing all AquaCell units horizontally

Material: Polypropylene

Nominal Size (mm)	Part Number
–	6LB105



AquaCell Shear Connector

- For jointing all AquaCell units vertically

Material: Polypropylene

Nominal Size (mm)	Part Number
–	6LB102



AquaCell Plus End Cap

- For blocking off unused inlets/outlets

Material: Polypropylene

Nominal Size (mm)	Part Number
–	6LB202

Your notes

Discover our broad portfolio at
www.wavin.co.uk



Water management | Plumbing and heating | Waste water drainage
Water and gas distribution | Datacom



Wavin is part of Orbia, a community of companies working together to tackle some of the world's most complex challenges. We are bound by a common purpose: To Advance Life Around the World.



Wavin Limited
Registered Office | Edlington Lane | Doncaster | DN12 1BY
Tel. 0800 038 0088 | www.wavin.co.uk | info@wavin.co.uk


Appendix G – Flow Control Device Details

Technical Specification

	Original Setting		Minimum Setting		Maximum Setting	
Control Point	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	1.000	2.000	1.000	1.789	1.000	2.174
Flush-Flo™	0.296	1.950	0.366	1.611	0.272	2.229
Kick-Flo®	0.599	1.584	0.598	1.416	0.598	1.728
Mean Flow		1.730		1.487		1.927



hydro-int.com/patents

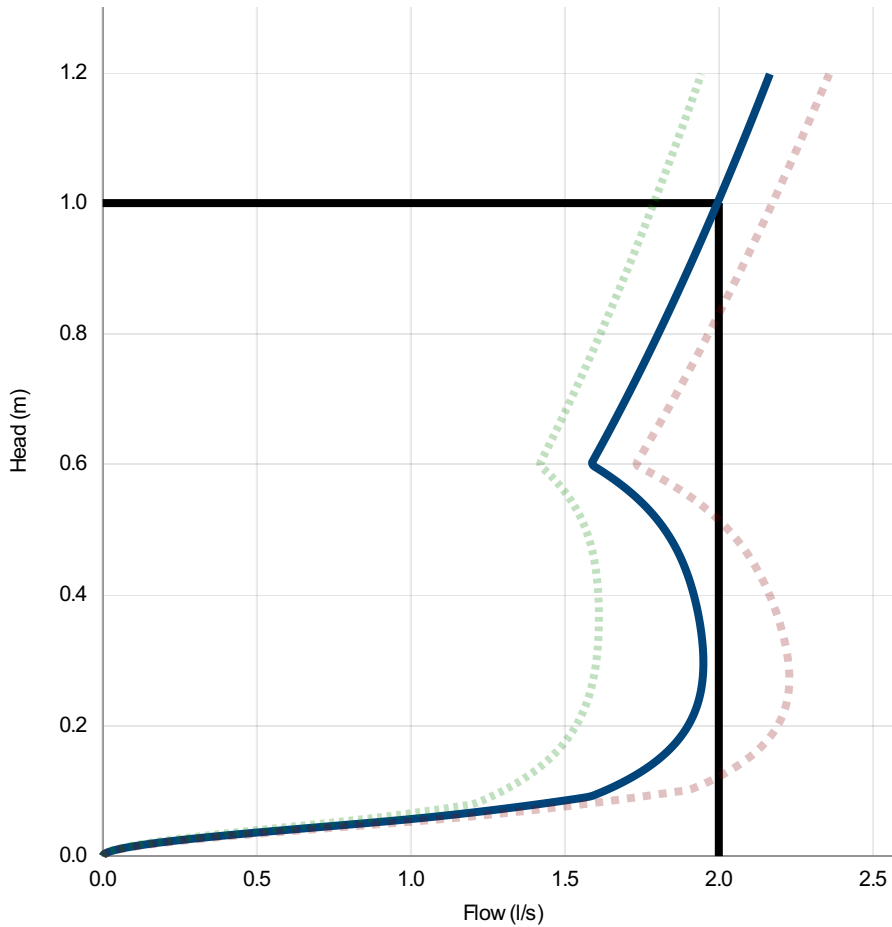

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.462
0.069	1.240
0.103	1.646
0.138	1.775
0.172	1.858
0.207	1.909
0.241	1.936
0.276	1.948
0.310	1.949
0.345	1.942
0.379	1.929
0.414	1.911
0.448	1.884
0.483	1.848
0.517	1.797
0.552	1.726
0.586	1.631
0.621	1.609
0.655	1.649
0.690	1.687
0.724	1.725
0.759	1.761
0.793	1.797
0.828	1.832
0.862	1.866
0.897	1.899
0.931	1.932
0.966	1.964
1.000	1.995

DESIGN ADVICE



The head/flow characteristics of this SHE-0067-2000-1000-2000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE	05/03/2026 12:28
Site	Caheanardrish LRD
DESIGNER	Ben Mong
Ref	24051 - HB1

SHE-0067-2000-1000-2000
Hydro-Brake® Optimum

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	2.000
Flush-Flo™	0.296	1.950
Kick-Flo®	0.599	1.584
Mean Flow		1.730

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 3 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 10 kg
- Product Carbon Footprint: 38.11 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

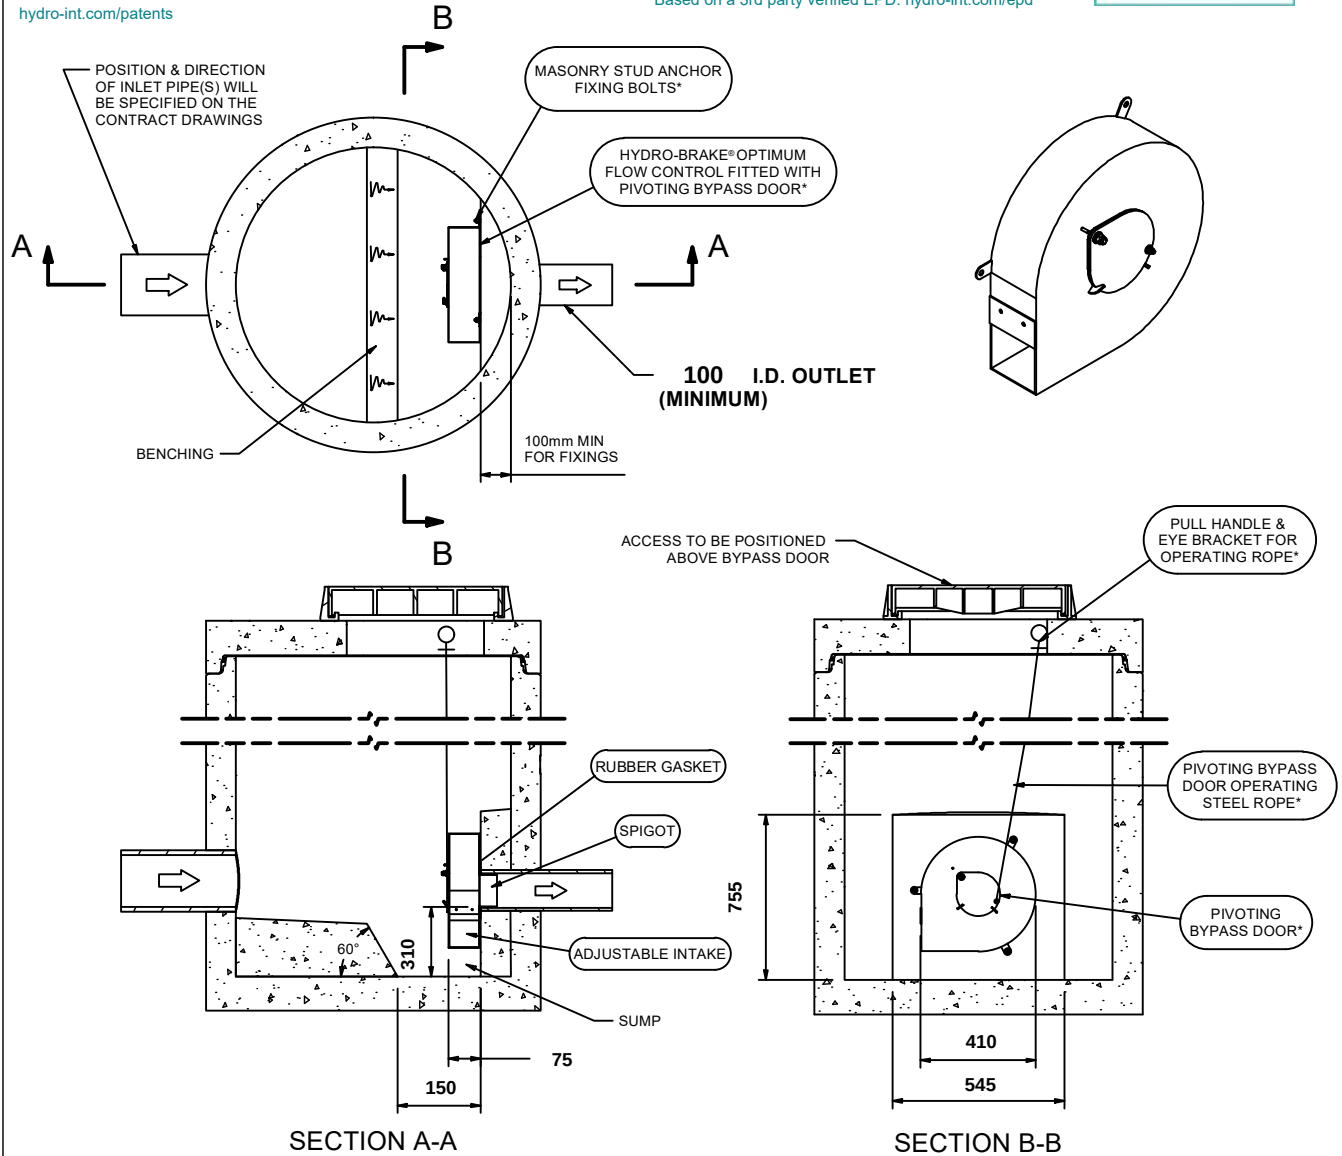

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDLED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0067-2000-1000-2000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**
 A CRH COMPANY

DATE	05/03/2026 12:28	SHE-0067-2000-1000-2000 Hydro-Brake® Optimum
SITE	Caheranardrish LRD	
DESIGNER	Ben Mong	
REF	24051 - HB1	

© 2026 Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • Website: hydro-int.com • Email: enquiries@hydro-int.com


bmong@oslbutler.ie

Technical Specification

	Original Setting		Minimum Setting		Maximum Setting	
Control Point	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	1.000	2.000	1.000	1.789	1.000	2.174
Flush-Flo™	0.296	1.950	0.366	1.611	0.272	2.229
Kick-Flo®	0.599	1.584	0.598	1.416	0.598	1.728
Mean Flow		1.730		1.487		1.927



hydro-int.com/patents

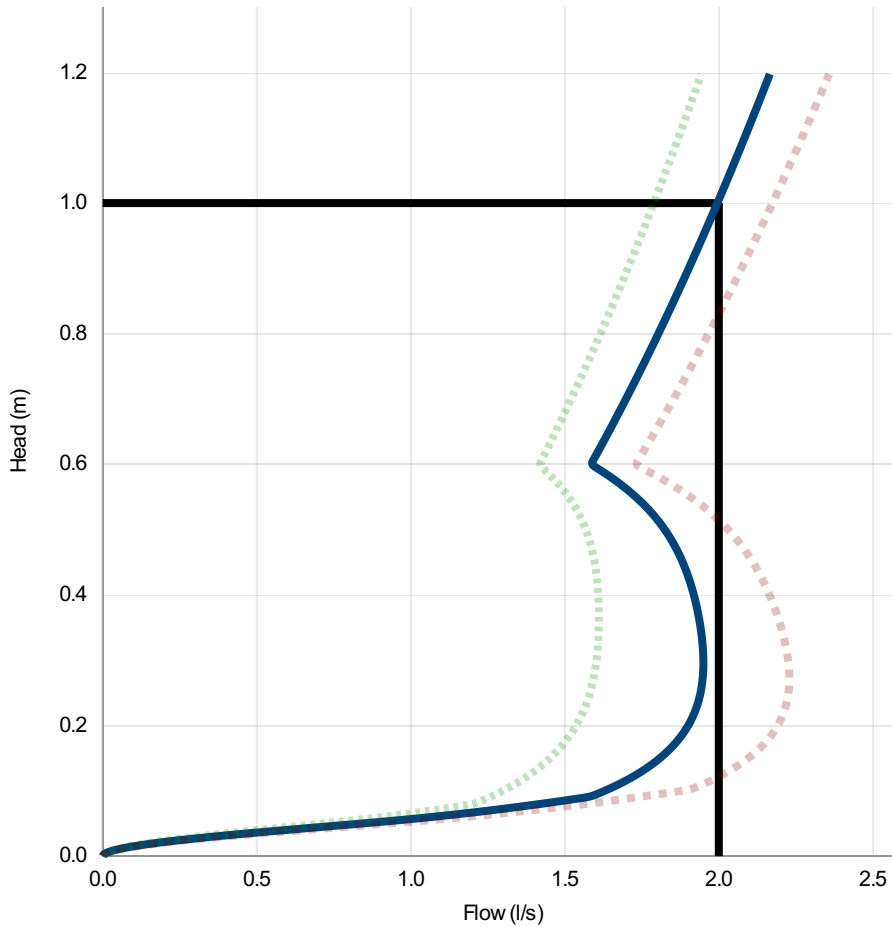

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.462
0.069	1.240
0.103	1.646
0.138	1.775
0.172	1.858
0.207	1.909
0.241	1.936
0.276	1.948
0.310	1.949
0.345	1.942
0.379	1.929
0.414	1.911
0.448	1.884
0.483	1.848
0.517	1.797
0.552	1.726
0.586	1.631
0.621	1.609
0.655	1.649
0.690	1.687
0.724	1.725
0.759	1.761
0.793	1.797
0.828	1.832
0.862	1.866
0.897	1.899
0.931	1.932
0.966	1.964
1.000	1.995

DESIGN ADVICE



The head/flow characteristics of this SHE-0067-2000-1000-2000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE	05/03/2026 12:29
Site	Caheanardrish LRD
DESIGNER	Ben Mong
Ref	24051 - HB2

SHE-0067-2000-1000-2000
Hydro-Brake® Optimum

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	2.000
Flush-Flo™	0.296	1.950
Kick-Flo®	0.599	1.584
Mean Flow		1.730

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 3 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 10 kg
- Product Carbon Footprint: 38.11 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

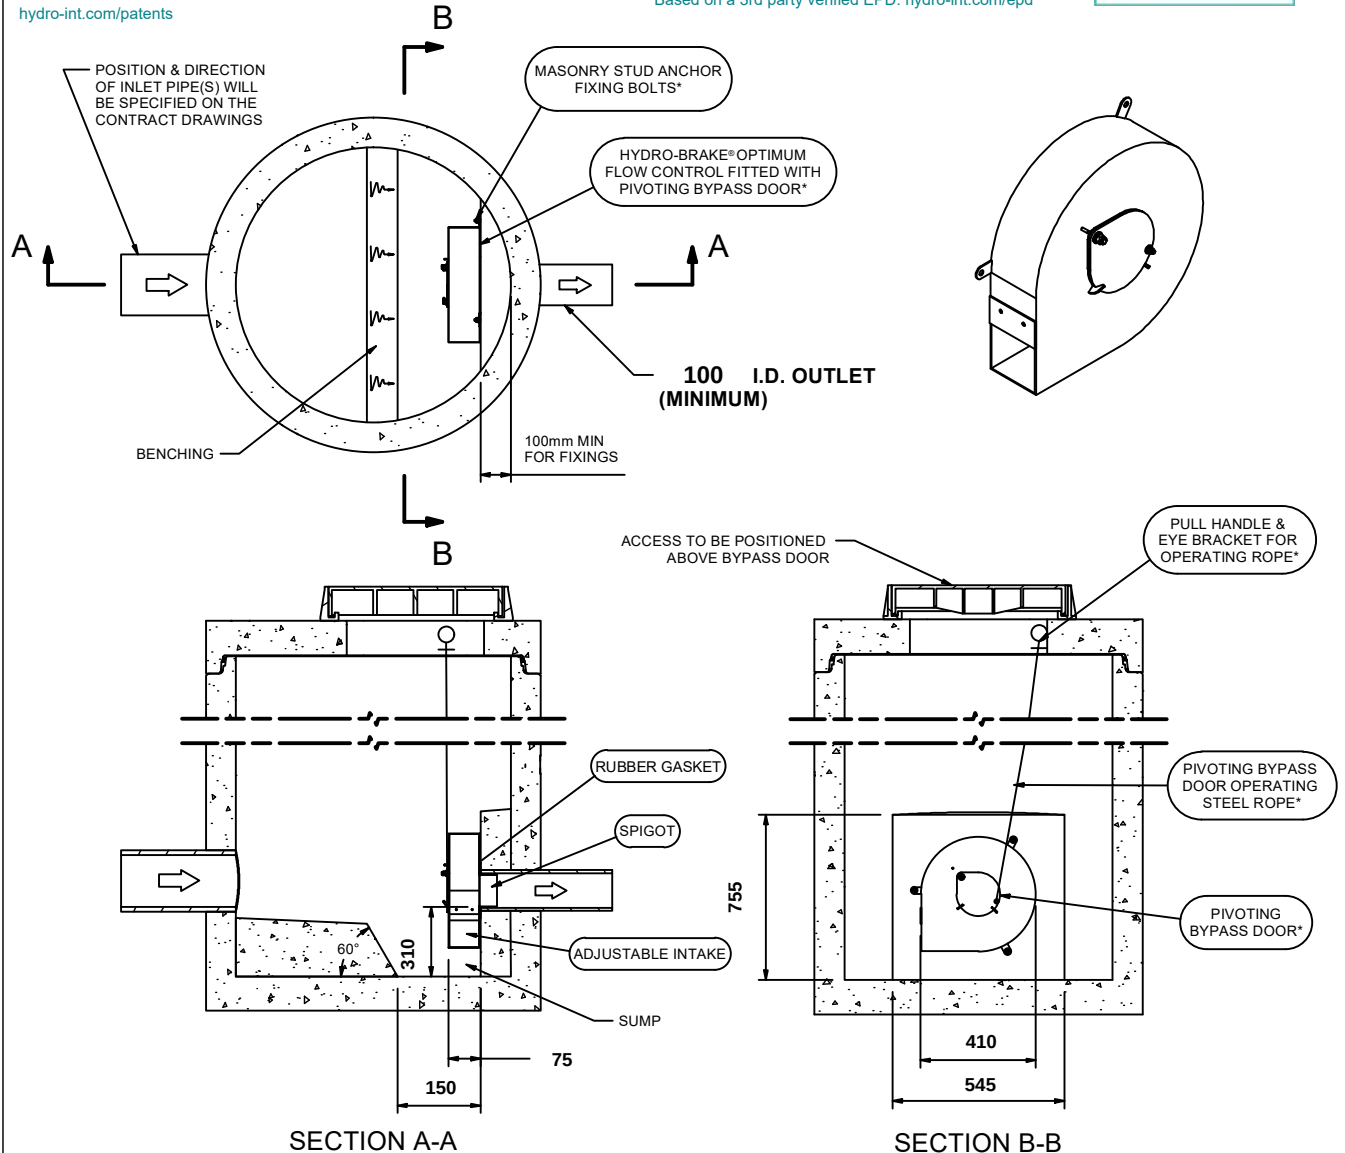

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDLED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0067-2000-1000-2000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**
 A CRH COMPANY

DATE 05/03/2026 12:29

SITE Caheranardrish LRD

DESIGNER Ben Mong

REF 24051 - HB2

SHE-0067-2000-1000-2000


Hydro-Brake® Optimum

Technical Specification

	Original Setting		Minimum Setting		Maximum Setting	
Control Point	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	1.000	6.000	1.000	5.246	1.000	6.647
Flush-Flo™	0.298	5.977	0.443	4.701	0.267	7.089
Kick-Flo®	0.647	4.896	0.647	4.284	0.650	5.448
Mean Flow		5.188		4.298		5.922



hydro-int.com/patents

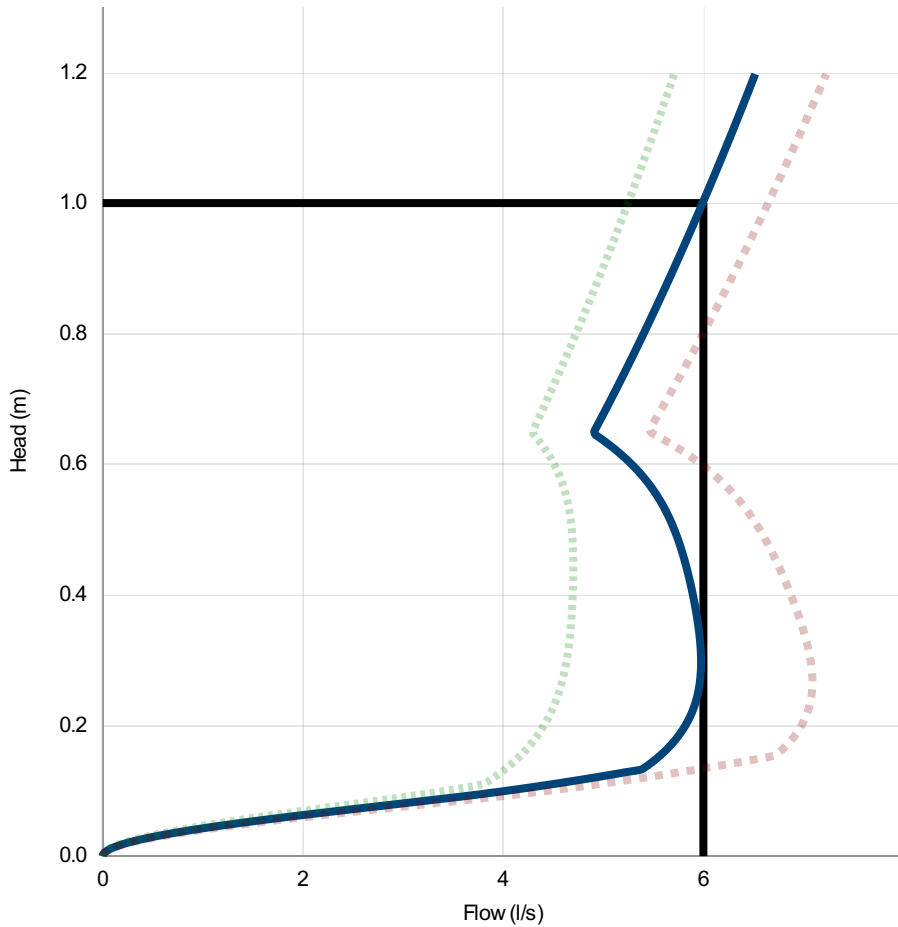

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.675
0.069	2.334
0.103	4.192
0.138	5.435
0.172	5.688
0.207	5.845
0.241	5.933
0.276	5.971
0.310	5.975
0.345	5.955
0.379	5.921
0.414	5.876
0.448	5.820
0.483	5.751
0.517	5.661
0.552	5.538
0.586	5.368
0.621	5.135
0.655	4.926
0.690	5.044
0.724	5.159
0.759	5.271
0.793	5.381
0.828	5.488
0.862	5.593
0.897	5.695
0.931	5.796
0.966	5.895
1.000	5.992

DESIGN ADVICE



The head/flow characteristics of this SHE-0115-6000-1000-6000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE	05/03/2026 12:30
Site	Caheanardrish LRD
DESIGNER	Ben Mong
Ref	24051 - HB3

SHE-0115-6000-1000-6000
Hydro-Brake® Optimum

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	6.000
Flush-Flo™	0.298	5.977
Kick-Flo®	0.647	4.896
Mean Flow		5.188

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 3 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 20 kg
- Product Carbon Footprint: 68.14 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

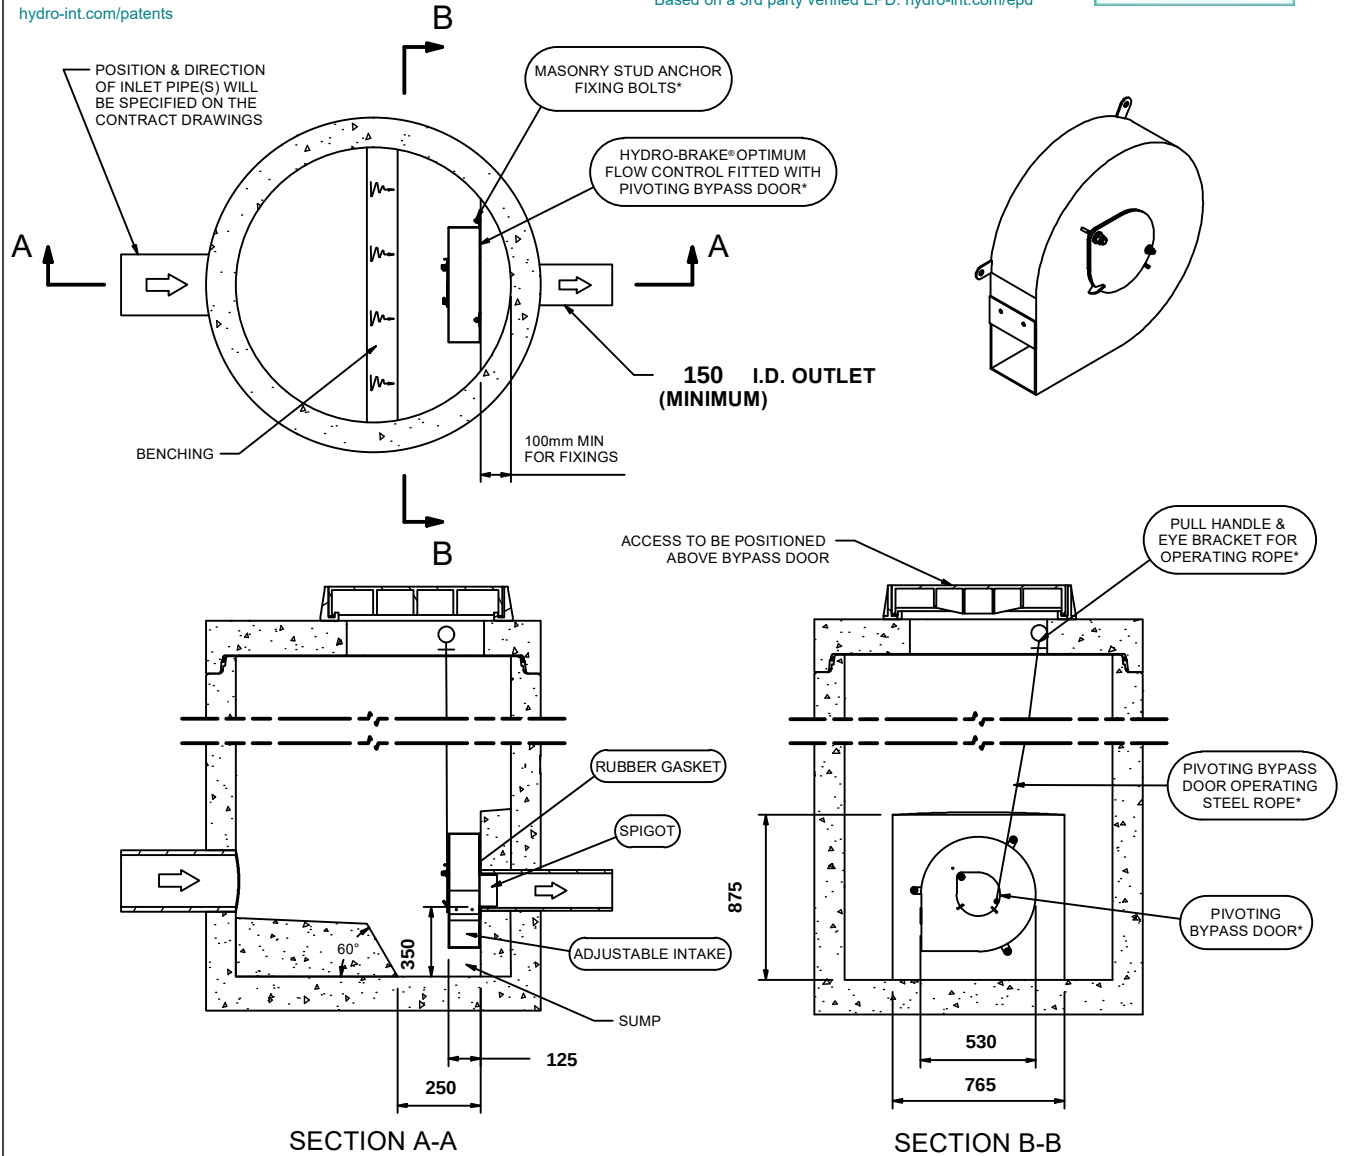

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0115-6000-1000-6000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International
A CRH COMPANY

DATE	05/03/2026 12:30	SHE-0115-6000-1000-6000 Hydro-Brake® Optimum
SITE	Caheranardrish LRD	
DESIGNER	Ben Mong	
REF	24051 - HB3	

© 2026 Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • Website: hydro-int.com • Email: enquiries@hydro-int.com


bmong@oslbutler.ie

Technical Specification

	Original Setting		Minimum Setting		Maximum Setting	
Control Point	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	1.000	8.000	1.000	6.954	1.000	8.923
Flush-Flo™	0.302	7.987	0.482	6.219	0.267	9.532
Kick-Flo®	0.664	6.608	0.665	5.744	0.664	7.376
Mean Flow		6.898		5.658		7.901



hydro-int.com/patents

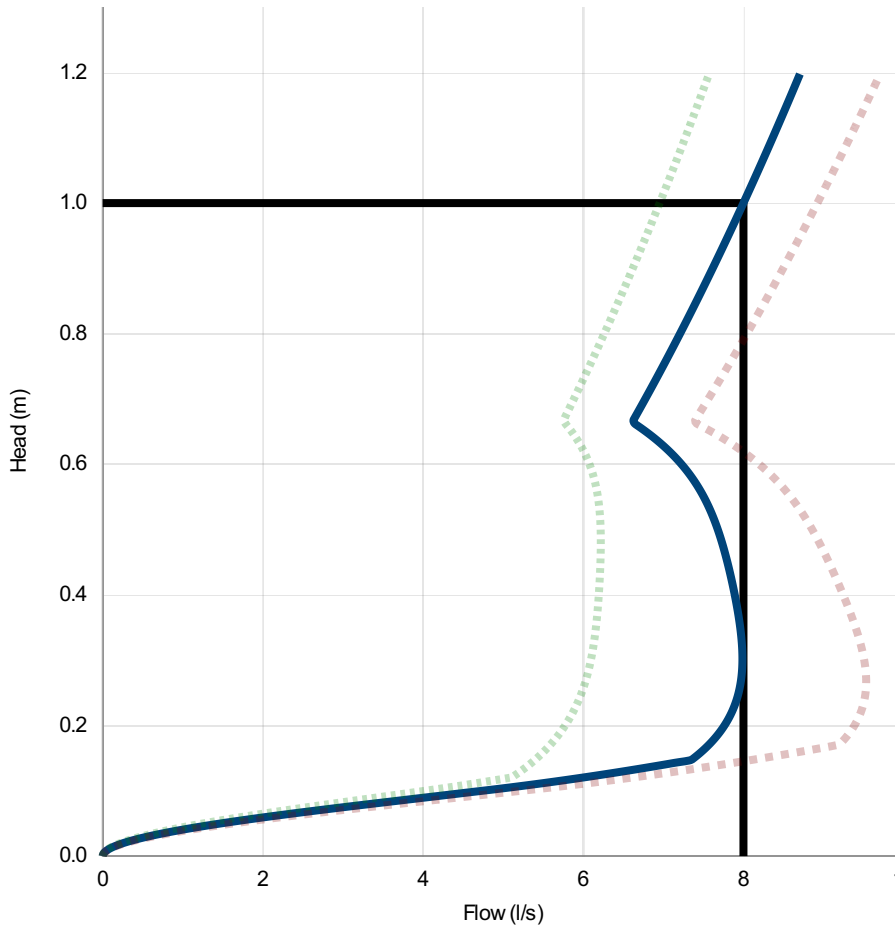

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.735
0.069	2.610
0.103	4.971
0.138	6.906
0.172	7.583
0.207	7.797
0.241	7.920
0.276	7.976
0.310	7.986
0.345	7.965
0.379	7.923
0.414	7.868
0.448	7.803
0.483	7.725
0.517	7.628
0.552	7.498
0.586	7.318
0.621	7.067
0.655	6.725
0.690	6.727
0.724	6.881
0.759	7.032
0.793	7.179
0.828	7.323
0.862	7.463
0.897	7.601
0.931	7.737
0.966	7.869
1.000	7.999

DESIGN ADVICE



The head/flow characteristics of this SHE-0132-8000-1000-8000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE	05/03/2026 12:31
Site	Caheanardrish LRD
DESIGNER	Ben Mong
Ref	24051 - HB4

SHE-0132-8000-1000-8000
Hydro-Brake® Optimum

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	8.000
Flush-Flo™	0.302	7.987
Kick-Flo®	0.664	6.608
Mean Flow		6.898

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 3 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 20 kg
- Product Carbon Footprint: 79.2 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

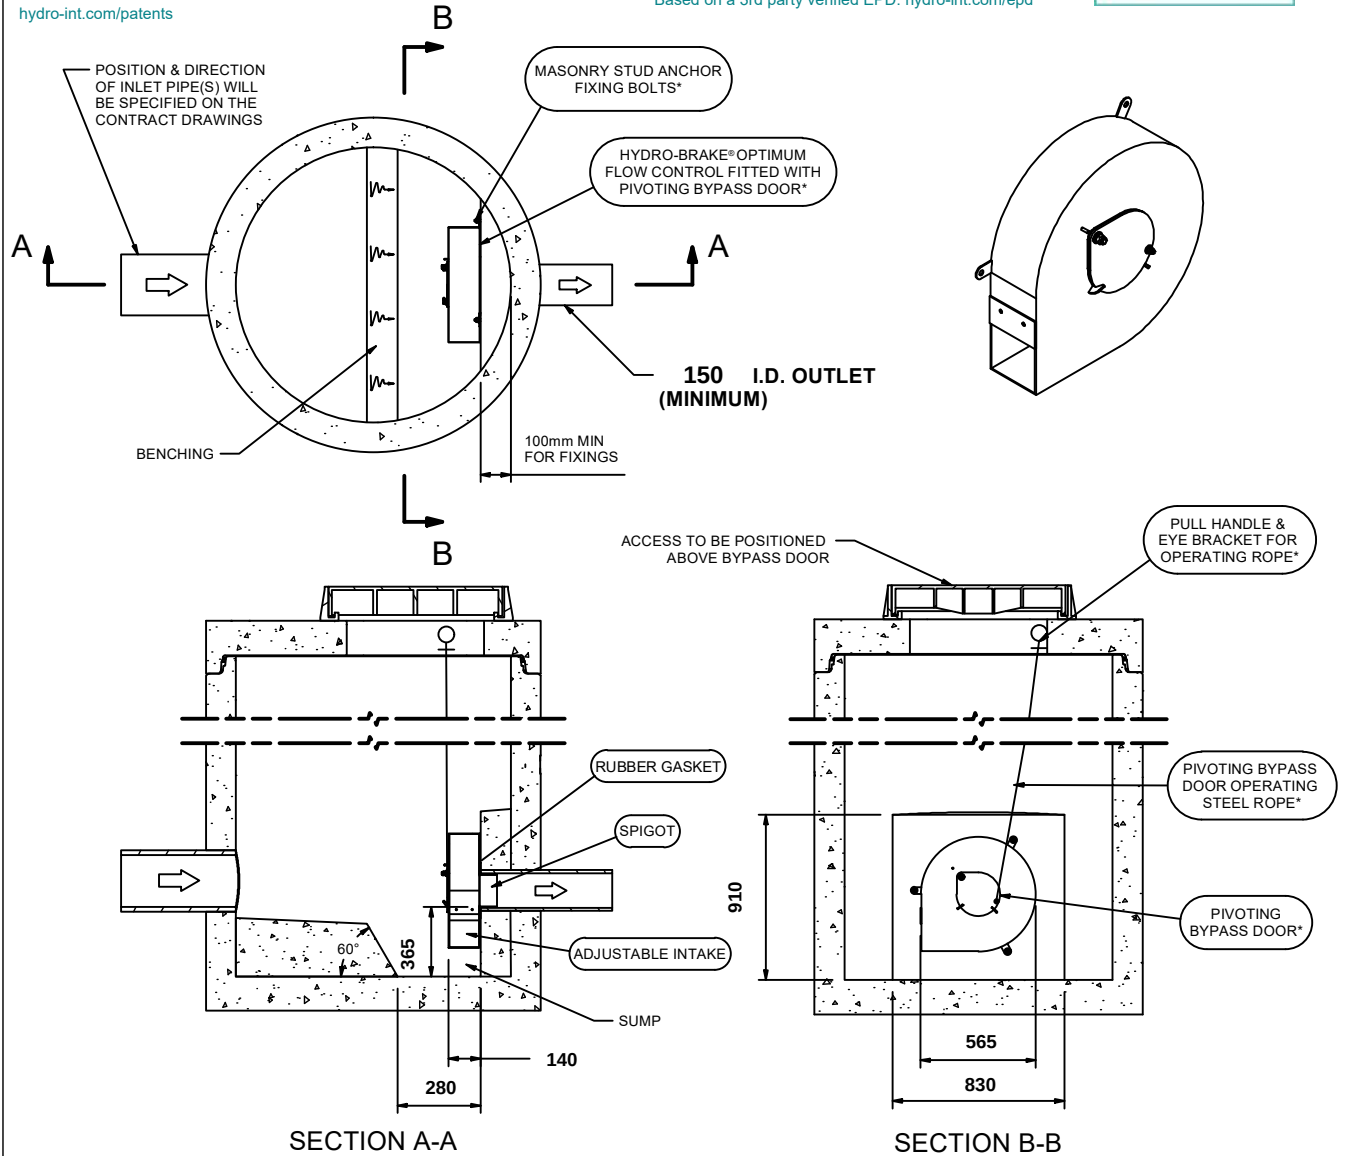

IMPORTANT: ○ LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDLED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0132-8000-1000-8000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

**Hydro
International**
 A CRH COMPANY

DATE 05/03/2026 12:31

SITE Caheranardrish LRD

DESIGNER Ben Mong

REF 24051 - HB4

SHE-0132-8000-1000-8000


Hydro-Brake® Optimum

Technical Specification

	Original Setting		Minimum Setting		Maximum Setting	
Control Point	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)	Head (m)	Flow (l/s)
Primary Design	1.000	11.200	1.000	9.648	1.000	12.576
Flush-Flo™	0.308	11.187	0.530	8.580	0.270	13.546
Kick-Flo®	0.683	9.363	0.684	8.064	0.684	10.528
Mean Flow		9.585		7.747		11.069



hydro-int.com/patents

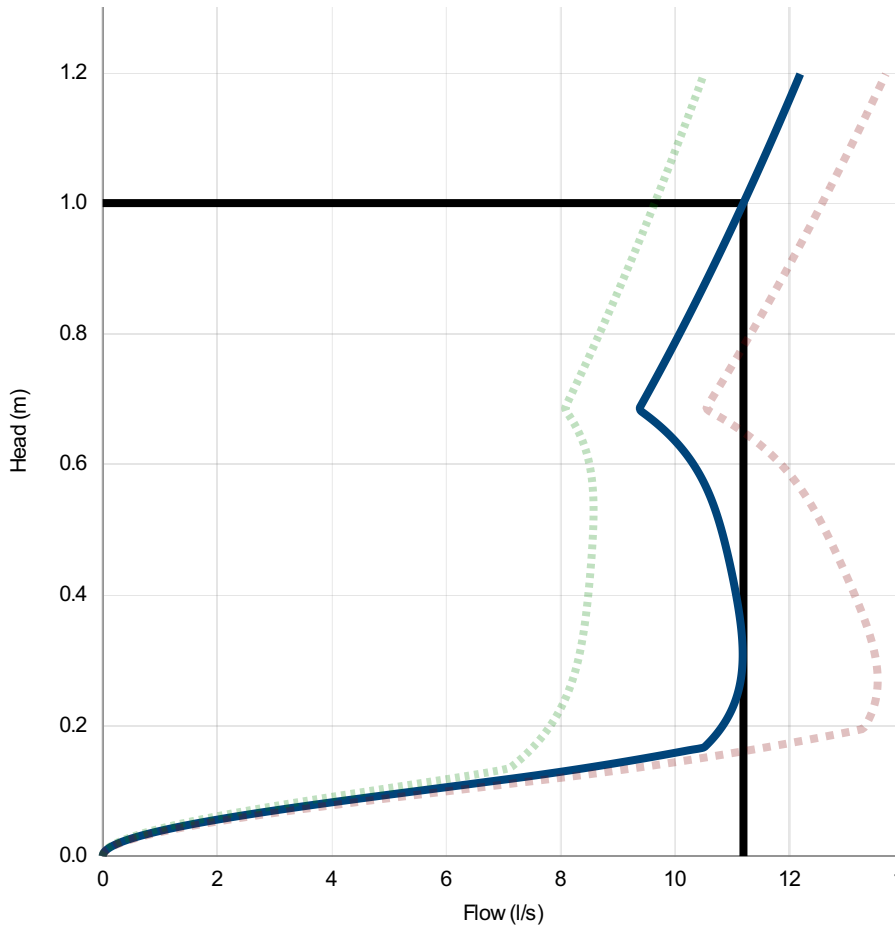

Head (m)	Flow (l/s)
0.000	0.000
0.034	0.807
0.069	2.934
0.103	5.822
0.138	8.658
0.172	10.582
0.207	10.890
0.241	11.072
0.276	11.163
0.310	11.187
0.345	11.164
0.379	11.112
0.414	11.042
0.448	10.960
0.483	10.866
0.517	10.755
0.552	10.614
0.586	10.422
0.621	10.154
0.655	9.781
0.690	9.406
0.724	9.623
0.759	9.835
0.793	10.043
0.828	10.245
0.862	10.444
0.897	10.638
0.931	10.828
0.966	11.015
1.000	11.199

DESIGN ADVICE



The head/flow characteristics of this SHE-0154-1120-1000-1120 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.

The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE	05/03/2026 12:32
Site	Caheanardrish LRD
DESIGNER	Ben Mong
Ref	24051 - HB5

SHE-0154-1120-1000-1120
Hydro-Brake® Optimum

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.000	11.200
Flush-Flo™	0.308	11.187
Kick-Flo®	0.683	9.363
Mean Flow		9.585

hydro-int.com/patents

This Hydro-Brake® Optimum includes:

- All in 3 mm Grade 304L stainless steel
- Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- Media blasted for corrosion resistance
- Variable flow rate post installation via adjustable inlet (if necessary)
- Indicative Weight: 25 kg
- Product Carbon Footprint: 94.31 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

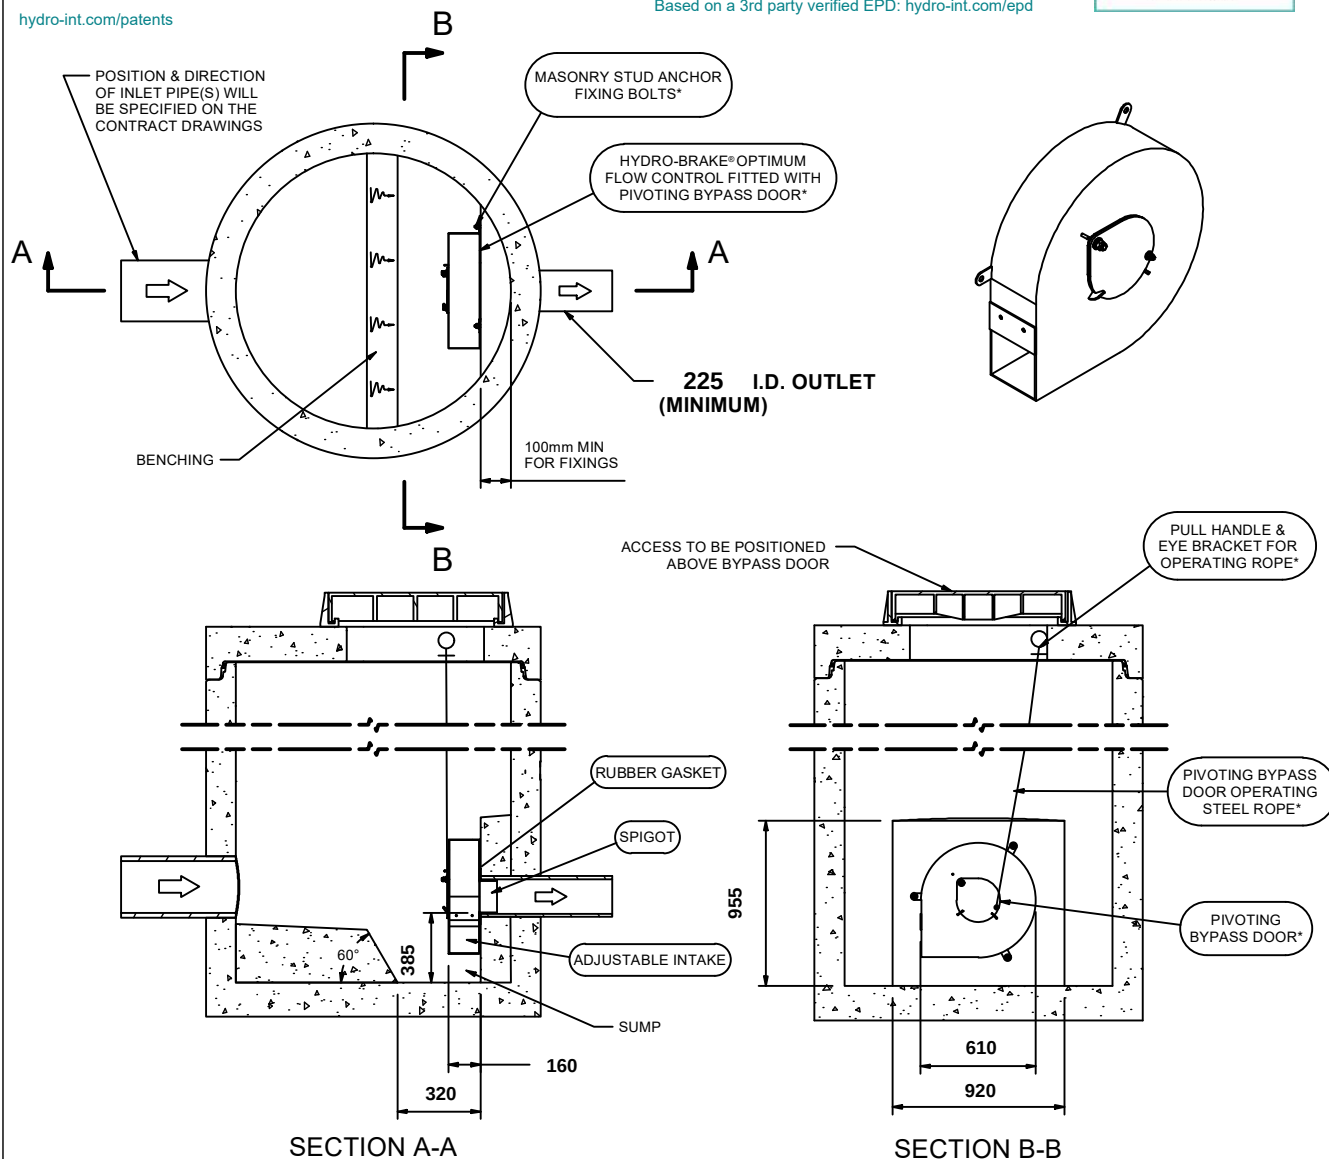

IMPORTANT: LIMIT OF HYDRO INTERNATIONAL SUPPLY
 THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
 FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
 ALL CIVIL AND INSTALLATION WORK BY OTHERS
 * WHERE SUPPLIED
 HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY
 HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0154-1120-1000-1120 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International
A CRH COMPANY

DATE 05/03/2026 12:32

SITE Caheranardrish LRD

DESIGNER Ben Mong

REF 24051 - HB5

SHE-0154-1120-1000-1120

Hydro-Brake® Optimum

Appendix H – Greenfield Runoff Rate Calculations

PROJECT
Proposed Development at Caheranardrish, Limerick, Co. Limerick

SUBJECT
Surface Water Calculations - Permissible Site Discharge

Drawing ref.

24051-OSL-11-DR-C-1120

Calculations by

RSP

Checked by

BJM

JOB REF.
24051

Calc. Sheet No.
1

Date

04.03.2026



PERMISSIBLE SURFACE WATER DISCHARGE CALCULATIONS

Site Area

What is the overall site area?

5.671

Hectares (ha)

Site is Less than 50 Hectares

Pre-Development Catchment Soil Characteristics

Are there different soil types present on the pre-developed site?

No

Catchment	This refers to the entire site area	1
Area		5.67
Drainage Group		1
Depth to Impermeable Layers		2
Permeability Group above Impermeable Layers		2
Slope ⁽⁶⁾		2
SOIL Type		2
¹ SOIL Index		0.30

SOIL	SOIL Value	SPR
1	0.15	0.10
2	0.30	0.30
3	0.40	0.37
4	0.45	0.47
5	0.50	0.53

Site SOIL Index Value

0.30

Site SPR Value

0.30

Post-Development Catchment Characteristics

Is the development divided into sub-catchments?

No

What is the actual drainage area for catchment?

5.579

Hectares (ha)

Overall Catchment	Area (m ²)	Runoff Coeff.	Effective Area (m ²)
Roads, Roofs, Hardstanding, Footpaths	27,325.53	1.00	27,325.53
Green Areas/ Landscaping	28,464.19	0.20	5,692.84

Effective Catchment Area

33018.4 m²

Effective Catchment Runoff Coefficient

0.59

Long-Term Storage

⁴Is long-term Storage provided?

Yes

Refer to Long-term Storage calculation Sheet

Permissible Site Discharge

Refer to UkSuds Calc

What is the Standard Average Annual Rainfall (SAAR)?

990.1

mm

Met Éireann Extreme Rainfall/SAAR 1991 – 2020

Co-ordinates (Irish Grid) Easting: 153316, Northing:
153488 (ITM X 553270, Y 653519)

Is the overall site area less than 50 hectares?

Yes

⁵QBAR_{Rural} calculated for 50 ha and linearly interpolated for area of site

15.3

Litres/sec

⁷Site Discharge =

11.2

Litres/sec

LCCC Surface Water/SuDs Specification 2022 requirement for
2l/s/ha or QBAR which ever is the greater restrictor

Notes and Formulae

1. SOIL index value calculated from Flood Studies Report - The Classification of Soils from Winter Rainfall Acceptance Rate (Table 4.5).

2. SPR value calculated from GDSDS - Table 6.7.

3. Rainfall depth for 100 year return period, 6 hour duration with additional 10% for climate change.

4. Long-term storage Vol_∞ (m³) = Rainfall.Area.10.[(PIMP/100)(0.8.α)+(1-PIMP/100)(β.SPR)-SPR]. (GDSDS Section 6.7.3).

Where long-term storage cannot be provided on-site due to ground conditions, Total Permissible Outflow is to be kept to QBAR_(Rural).

5. Total Permissible Outflow - QBAR_(Rural) calculated in accordance with GDSDS - Regional Drainage Policies

(Volume 2 - Chapter 6), i.e. QBAR(m³/s)=0.00108x(Area)^{0.89}(SAAR)^{1.17}(SOIL)^{2.17} - For catchments greater than 50 hectares in area. Flow rates are linearly interpolated for areas smaller than 50 hectares.

6. Where Total Permissible Outflow is less than 2.0l/s and not achievable, use 2.0 l/s or closest value possible.

7. QBAR multiplied by growth factors of 0.85 for 1 year, 2.1 for 30 year and 2.6 for 100 year return period events, from GDSDS Figure C2 or 2l/s/ha whichever is the greater restriction as per LCCC Surface Water/SuDs Specification 2022

PROJECT
Proposed Development at Caheranardrish, Limerick, Co. Limerick

JOB REF.
24051

SUBJECT
Surface Water Calculations - Soil Characteristics from FSR

Calc. Sheet No.
2

Drawing ref.
24051-OSL-11-DR-C-
1120

Calculations by
DV

Checked by
DB

Date
04.03.2026

Estimation of flood peaks from catchment characteristics

Property	Classes
A Drainage group	1 Rarely waterlogged within 60 cm at any time (well and moderately well drained) 2 Commonly waterlogged within 60 cm during winter (imperfect and poor) 3 Commonly waterlogged within 60 cm during winter and summer (very poorly drained)
B Depth to 'impermeable' layers	1 >80 cm 2 80-40 cm 3 <40 cm
C Permeability group (above 'impermeable' layers or to 80 cm)	1 Rapid 2 Medium 3 Slow
D Slope	1 0-2° 2 2-8° 3 >8°

Table 4.4 Classification of soil factors.

Having decided all four parameters, Table 4.5 was used to reach the index of 'winter rain acceptance'.

Table 4.5 The classification of soils by winter rain acceptance rate from soil survey data.

Drainage class Group	Depth to impermeable layer (cm)	Slope classes								
		0 - 2°			2 - 8°			>8°		
		Permeability rates above impermeable layers								
		Rapid (1)	Medium (2)	Slow (3)	Rapid (1)	Medium (2)	Slow (3)	Rapid (1)	Medium (2)	Slow (3)
1	>80	1			1			1	2	3
	40 - 80	1					3			4
	<40	—	—	—	—	—	—	—	—	—
2	>80	2	3				4	—		
	40 - 80						4			
	<40	3								
3	>80							—		
	40 - 80				5			—		
	<40									

Winter rain acceptance indices: 1, very high; 2, high; 3, moderate; 4, low; 5, very low. Upland peat and peaty soils are in Class 5. Urban areas are unclassified.

1. Soil index (SPR) value calculated from Flood Studies Report - The Classification of Soils from Winter Rainfall Acceptance Rate (Table 4.5).

PROJECT		JOB REF.	
Proposed Development at Caheranardrish, Limerick, Co. Limerick		24051	
SUBJECT		Calc. Sheet No.	
Surface Water Calculations - Long-Term Storage		3	
Drawing ref. 24051-OSL-11-DR-C-1120	Calculations by BJM	Checked by DB	Date 24.07.2026

The Long-Term Storage Volume has been calculated in accordance with Section 6.7 of the GDSDS and Section 24.10 of CIRIA C753.

The SuDS Manual Equation for greenfield development sites

$$Vol_{xs} = RD \times A \times 10 (0.8 - SPR) \frac{PIMP}{100}$$

Calculation Inputs

RD	Rainfall depth during 1 in 100 year, 6 hour storm event	56.400	mm	
A	Total developable area of site	5.579	ha	
SPR	Standard percentage runoff from greenfield site	0.300		
PIMP	Percentage impermeable area following development	59.184	%	

Calculation Outputs

Difference in Runoff Volume, Vol_{xs} (i.e Long Term Storage Volume)	931.108	m ³
---	----------------	----------------

Met Éireann Extreme Rainfall\SAAR 1991 – 2020, Co-ordinates (Irish Grid) Easting: 153316, Northing: 153488 (ITM X 553270, Y 653519)

Appendix I – SuDS Calculations and Summary

TITLELarge Scale Residential Development at Caheranardish,
Limerick, Co. Limerick**Job Reference**

24051

SUBJECT

Interception/Treatment Volume Summary

Calc. Sheet No.

1

**DRAWING NUMBER**

24051-OSL-11-DR-C-1120

Calculations by

RSP

Checked by

BJM

Date

04.03.2026

INPUT DATAInterception Volume Required 132.07 m³Treatment Volume Required 396.22 m³**Catchment****Interception Volumes****Treatment Volumes**

Swales	136.3 m ³	158.2 m ³
Bio-Retention - Tree Pits	30.0 m ³	8.1 m ³
Bio-retention - Raingardens	73.1 m ³	66.1 m ³
Private Permeable Paving (Tanked).	0.0 m ³	438.1 m ³
Public Permeable Paving (Untanked)	608.3 m ³	52.0 m ³
Green Roof	0 m ³	34.5 m ³

Total Volumes Provided 847.7 m³ 757.0 m³

Check Provided Volumes are greater than Required Volumes PASS PASS

TITLE Proposed Development at Caheranardish, Limerick, Co. Limerick		Job Reference 24051		
SUBJECT Raised Planters - Bioretention Design		Raingarden 1	Calc. Sheet No. 1	
DRAWING NUMBER 24051-OSL-11-DR-C-1120		Calculations by RSP	Checked by BJM	

<u>BIORETENTION AREA</u>	
Surface Area of Bioretention Area (A_f)	180.0 m ²

<u>TREATMENT VOLUME</u>	
¹ Treatment Volume (V_T)	66.1 m ³

<u>CATCHMENT AREA</u>	
Effective Impermeable Area Covered for Treatment (A)	5400.0 m ²

<u>INPUT DATA</u>	
² Filter Bed Depth (L)	0.800 m
Coefficient of Permeability of Filter Medium (k)	0.000002 m/s
³ Average Height of Water above Filter Bed (h)	0.050 m
⁴ Time Required for Percolation (t)	48.0 hr

<u>INFILTRATION VOLUME</u>	
Subgrade Infiltration Rate per hour	20.00 mm/hr
Subgrade Infiltration Rate (f)	0.006 mm/s
⁵ Subgrade Infiltration Volume	73.1 m ³

Notes:

- 1 Treatment Volume V_t (m³) = Impermeable Area (ha) x 15mm x 10 x 80% (GDSDS Section 6.3.1.2.1).
- 2 Filter Bed depth typically between 0.9 and 1.5m
- 3 h = Half maximum height, where $h_{max} \leq 2m$
- 4 Typically between 24 and 48 hours
- 5 Volume calculated using 6 hour storm event.

Area of Bioretention Filter Bed = $\frac{V_T \cdot L}{k(h+L)t}$

Soil Type/Texture	Infiltration Rate (m/s)
Source: SUDS Manual Table 25-1	
Gravel	0.0003 - 0.03
Sand	0.00001 - 0.00005
Loamy Sand	0.0001 - 0.00003
Sandy Loam	0.0000001 - 0.000001
Loam	0.0000001 - 0.000005
Silt Loam	0.0000001 - 0.000001
Chalk	0.00000003 - 0.0000003
Sandy Clay Loam	0.0000000003 - 0.00000003
Silty Clay Loam	0.00000001 - 0.0000001
Clay	< 0.00000003
Till	0.000000003 - 0.0000003

TITLE Proposed Development at Caheranardish, Limerick, Co. Limerick		Job Reference 24051	
SUBJECT GREEN ROOF DESIGN		Calc. Sheet No. 1	
DRAWING NUMBER 24051-OSL-11-DR-C-1120		Calculations by RSP	Checked by BJM
		Date 04.03.2026	

INPUT DATA

Green Roof Area (A)

460.0

m²

¹Filter Layer Depth (d)

0.250

m

¹Filter Layer Voids Ratio (η)

30.0

%

TREATMENT VOLUME

²Treatment Volume (V_T)

34.5

m³

EVAPOTRANSPIRATION VOLUME

³Evapotranspiration Rate per Day

5.00

mm/day

Evapotranspiration Volume

2.300

m³

Notes:

1 Filter Bed depth typically between 0.25 and 0.35m

2 Treatment Volume V_t (m³) = Green Roof Area (m²) x d x η

3 Assumed 2mm evaporation and 3mm transpiration.

TITLE Proposed Development at Caheranardish, Limerick, Co. Limerick		Job Reference 24051		
SUBJECT Public Permeable Paving Design (Partial Infiltration/not sealed)		Calc. Sheet No. 1		
DRAWING NUMBER 24051-OSL-11-DR-C-1120		Calculations by RSP	Checked by BJM	

FLAT SITES

INPUT DATA

Pavement Area (A)	385.00	m ²
Pavement Perimeter (P)	462.00	m
Sub-base Depth (d)	0.450	m
¹ Sub-base Voids Ratio (η)	0.30	
Sub-base Infiltration Rate per hour	3600	mm/hr
Sub-base Infiltration Rate (k)	1.000	mm/s
Subgrade Infiltration Rate per hour	171.00	mm/hr
Subgrade Infiltration Rate (f)	0.048	mm/s

VOLUME (STORAGE AND TREATMENT)

Permeable Paving Storage Volume per m ²	0.135	m ³ /m ²
Total Permeable Paving Storage Volume	52.0	m ³

INFILTRATION

Approx. Permeable Paving Infiltration per m ²	0.073	l/s/m ²
² Total Permeable Paving Infiltration Rate	28.163	l/s
³ Total Permeable Paving Infiltration Volume	608.3	m ³

FLOW

Average Distance between Outlet Drains	5.0	m
Flow Velocity through Permeable Paving	0.000183	m/s
Trench Retention Time	7.6	hr

TITLE

Proposed Development at Caheranardish, Limerick, Co. Limerick

Job Reference

24051



SUBJECT

Public Permeable Paving Design (Partial Infiltration/not sealed)

Calc. Sheet No.

1

DRAWING NUMBER

24051-OSL-11-DR-C-1120

Calculations by

RSP

Checked by

BJM

Date

04.03.2026

Notes:

- 1 Sub-base material has a void ratio of approximately 30%, source 'BRE Digest 365'.
- 2 Wetted perimeter assuming 50% of trench depth, source 'BRE Digest 365'.
- 3 Volume calculated using 6 hour storm event.
- 4 For Paving on slopes includes infiltration, provide 500mmx500mm trenches at 10m centres along slope with 1000mmx500mm at base of slope. source 'Formpave - Aquaflo Permeable Paving System'.

Table: 1

Material	void Ratio, η
Clean stone	0.40 - 0.50
Uniform gravel	0.30 - 0.40
Graded sand or gravel	0.20 - 0.30

Source: The SUDS manual, Published by CIRIA.

Table: 2

Pavement Type	Effective Depth (m)
Car-Parking	0.40
Footpath	0.20

Effective Depths are provided from source 'Formpave - Aquaflo Permeable Paving System' and may subject to change as per site requirement.

Total Permeable Paving Outflow:

$$= A \cdot k \cdot i$$

where:

A = Cross Sectional Area of Subbase

k = Subbase Infiltration Rate

i = Hydraulic Gradient

Hydraulic gradient has been assumed as the pavement gradient with an additional 250mm fall per 100m length.

Table: 3

Material	Infiltration Rate (mm/hr)
Gravel	10 - 1000
Sand	0.1 - 100
Loamy sand	0.01 - 1
Sandy loam	0.05 - 0.5
Loam	0.001 - 0.1
Silt loam	0.0005 - 0.005
Chalk	0.001 - 100
Sandy clay loam	0.001 - 0.01
Silty clay loam	0.00005 - 0.005
Clay	< 0.0001
Till	0.00001 - 0.01
Rock	0.00001 - 1

Cutoff point for most infiltration drainage systems = 0.001 mm/hr
Source: Microdrainage

Total Trench Infiltration:

$$= 1/2 \cdot D \cdot L \cdot f$$

where:

L = Length

D = Depth to Invert

f = Subgrade infiltration rate

TITLE Proposed Development at Caheranardish, Limerick, Co. Limerick		Job Reference 24051		
SUBJECT Private Permeable Paving Design (Tanked/Sealed)		Calc. Sheet No. 1		
DRAWING NUMBER 24051-OSL-11-DR-C-1120		Calculations by RSP	Checked by BJM	

FLAT SITES

INPUT DATA

Pavement Area (A)	3,245.00	m ²
Pavement Perimeter (P)	3,894.00	m
Sub-base Depth (d)	0.450	m
¹ Sub-base Voids Ratio (η)	0.30	
Sub-base Infiltration Rate per hour	3600	mm/hr
Sub-base Infiltration Rate (k)	1.000	mm/s
Subgrade Infiltration Rate per hour	0.00	mm/hr
Subgrade Infiltration Rate (f)	0.000	mm/s

VOLUME (STORAGE AND TREATMENT)

Permeable Paving Storage Volume per m ²	0.135	m ³ /m ²
Total Permeable Paving Storage Volume	438.1	m³

INFILTRATION

Approx. Permeable Paving Infiltration per m ²	0.000	l/s/m ²
² Total Permeable Paving Infiltration Rate	0.000	l/s
³ Total Permeable Paving Infiltration Volume	0.0	m³

FLOW

Average Distance between Outlet Drains	5.0	m
Flow Velocity through Permeable Paving	0.000183	m/s
Trench Retention Time	7.6	hr

TITLE

Proposed Development at Caheranardish, Limerick, Co. Limerick

Job Reference

24051



SUBJECT

Private Permeable Paving Design (Tanked/Sealed)

Calc. Sheet No.

1

DRAWING NUMBER

24051-OSL-11-DR-C-1120

Calculations by

RSP

Checked by

BJM

Date

04.03.2026

Notes:

- 1 Sub-base material has a void ratio of approximately 30%, source 'BRE Digest 365'.
- 2 Wetted perimeter assuming 50% of trench depth, source 'BRE Digest 365'.
- 3 Volume calculated using 6 hour storm event.
- 4 For Paving on slopes includes infiltration, provide 500mmx500mm trenches at 10m centres along slope with 1000mmx500mm at base of slope. source 'Formpave - Aquaflo Permeable Paving System'.

Table: 1

Material	void Ratio, η
Clean stone	0.40 - 0.50
Uniform gravel	0.30 - 0.40
Graded sand or gravel	0.20 - 0.30

Source: The SUDS manual, Published by CIRIA.

Table: 2

Pavement Type	Effective Depth (m)
Car-Parking	0.40
Footpath	0.20

Effective Depths are provided from source 'Formpave - Aquaflo Permeable Paving System' and may subject to change as per site requirement.

Total Permeable Paving Outflow:

$$= A \cdot k \cdot i$$

where:

A = Cross Sectional Area of Subbase

k = Subbase Infiltration Rate

i = Hydraulic Gradient

Hydraulic gradient has been assumed as the pavement gradient with an additional 250mm fall per 100m length.

Table: 3

Material	Infiltration Rate (mm/hr)
Gravel	10 - 1000
Sand	0.1 - 100
Loamy sand	0.01 - 1
Sandy loam	0.05 - 0.5
Loam	0.001 - 0.1
Silt loam	0.0005 - 0.005
Chalk	0.001 - 100
Sandy clay loam	0.001 - 0.01
Silty clay loam	0.00005 - 0.005
Clay	< 0.0001
Till	0.00001 - 0.01
Rock	0.00001 - 1

Cutoff point for most infiltration drainage systems = 0.001 mm/hr
Source: Microdrainage

Total Trench Infiltration:

$$= 1/2 \cdot D \cdot L \cdot f$$

where:

L = Length

D = Depth to Invert

f = Subgrade infiltration rate

TITLE Proposed Development at Caheranardish, Limerick, Co. Limerick		Job Reference 24051	
SUBJECT Tree Pits		Calc. Sheet No. 1	
DRAWING NUMBER 24051-OSL-11-DR-C-1120		Calculations by RSP	Checked by BJM
		Date 04.03.2026	



BIORETENTION AREA

Surface Area of Bioretention Area (A_f) 22.5 m²

TREATMENT VOLUME

¹Treatment Volume (V_T) 8.1 m³

CATCHMENT AREA

Effective Impermeable Area Covered for Treatment (A) 675.0 m²

INPUT DATA

²Filter Bed Depth (L) 1.200 m

Coefficient of Permeability of Filter Medium (k) 0.000002 m/s

³Average Height of Water above Filter Bed (h) 0.050 m

⁴Time Required for Percolation (t) 48.0 hr

INFILTRATION VOLUME

Subgrade Infiltration Rate per hour 20.0 mm/hr

Subgrade Infiltration Rate (f) 0.006 mm/s

⁵Subgrade Infiltration Volume 30.0 m³

Notes:

1 Treatment Volume V_t (m³) = Impermeable Area (ha) x 15mm x 10 x 80% (GDSDS Section 6.3.1.2.1).

2 Filter Bed depth typically between 0.9 and 1.5m

3 h = Half maximum height, where $h_{max} \leq 2m$

4 Typically between 24 and 48 hours

5 Volume calculated using 6 hour storm event.

Area of Bioretention Filter Bed = $\frac{V_T \cdot L}{k(h+L)t}$

Table: 1 Coefficient of Permeability of Filter Medium

Soil Type/Texture	Infiltration Rate (m/s)
Source: SUDS Manual Table 25-1	
Gravel	0.0003 - 0.03
Sand	0.00001 - 0.00005
Loamy Sand	0.0001 - 0.00003
Sandy Loam	0.0000001 - 0.00001
Loam	0.0000001 - 0.00005
Silt Loam	0.0000001 - 0.00001
Chalk	0.00000003 - 0.000003
Sandy Clay Loam	0.000000003 - 0.0000003
Silty Clay Loam	0.0000001 - 0.000001
Clay	< 0.00000003
Till	0.000000003 - 0.000003

Appendix J – Interception and Treatment Calculations

PROJECT
Proposed Development at Caheranardrish, Limerick, Co. Limerick

JOB REF.
24051

SUBJECT
Surface Water Calculations - Treatment Volume

Calc. Sheet No.
1

Drawing ref.

Calculations by

Checked by

Date

24051-OSL-11-DR-C-1120

DV

DB

04.03.2026



SURFACE WATER CALCULATIONS

Site Area

Total Site Area =	5.67	Hectares (ha)
--------------------------	------	---------------

Treatment Volume (Post-Development)

Impermeable Area =	3.302	Hectares (ha)
Rainfall Depth =	15	mm
Treatment Volume (Vt) =	396.2204	m ³

Notes

1. Treatment Volume Vt (m³) = Impermeable Area (ha) x 15mm x 10 (GSDS Section 6.3.1.2.1). For sites where a pond is applicable.

80% runoff from impermeable areas assumed.

PROJECT
Proposed Development at Caheranardrish, Limerick, Co. Limerick

JOB REF.
24051

SUBJECT
Surface Water Calculations - Interception Volume

Calc. Sheet No.
2

Drawing ref.

Calculations by **Checked by**

Date

24051-OSL-11-DR-C-1120

DV

DB

04.03.2026



SURFACE WATER CALCULATIONS

Site Area

Total Site Area =	5.67	Hectares (ha)
--------------------------	------	---------------

Interception Volume (Post-Development)

Impermeable Area =	3.302	Hectares (ha)
Rainfall Depth =	5	mm
¹Interception Volume =	132.07346	m ³

Notes

1. Interception Volume (m³) = Impermeable Area (ha) x 5mm x 10 (GDSDS Section 6.3.1.2.1). For sites where a pond is applicable.

80% runoff from impermeable areas assumed.