



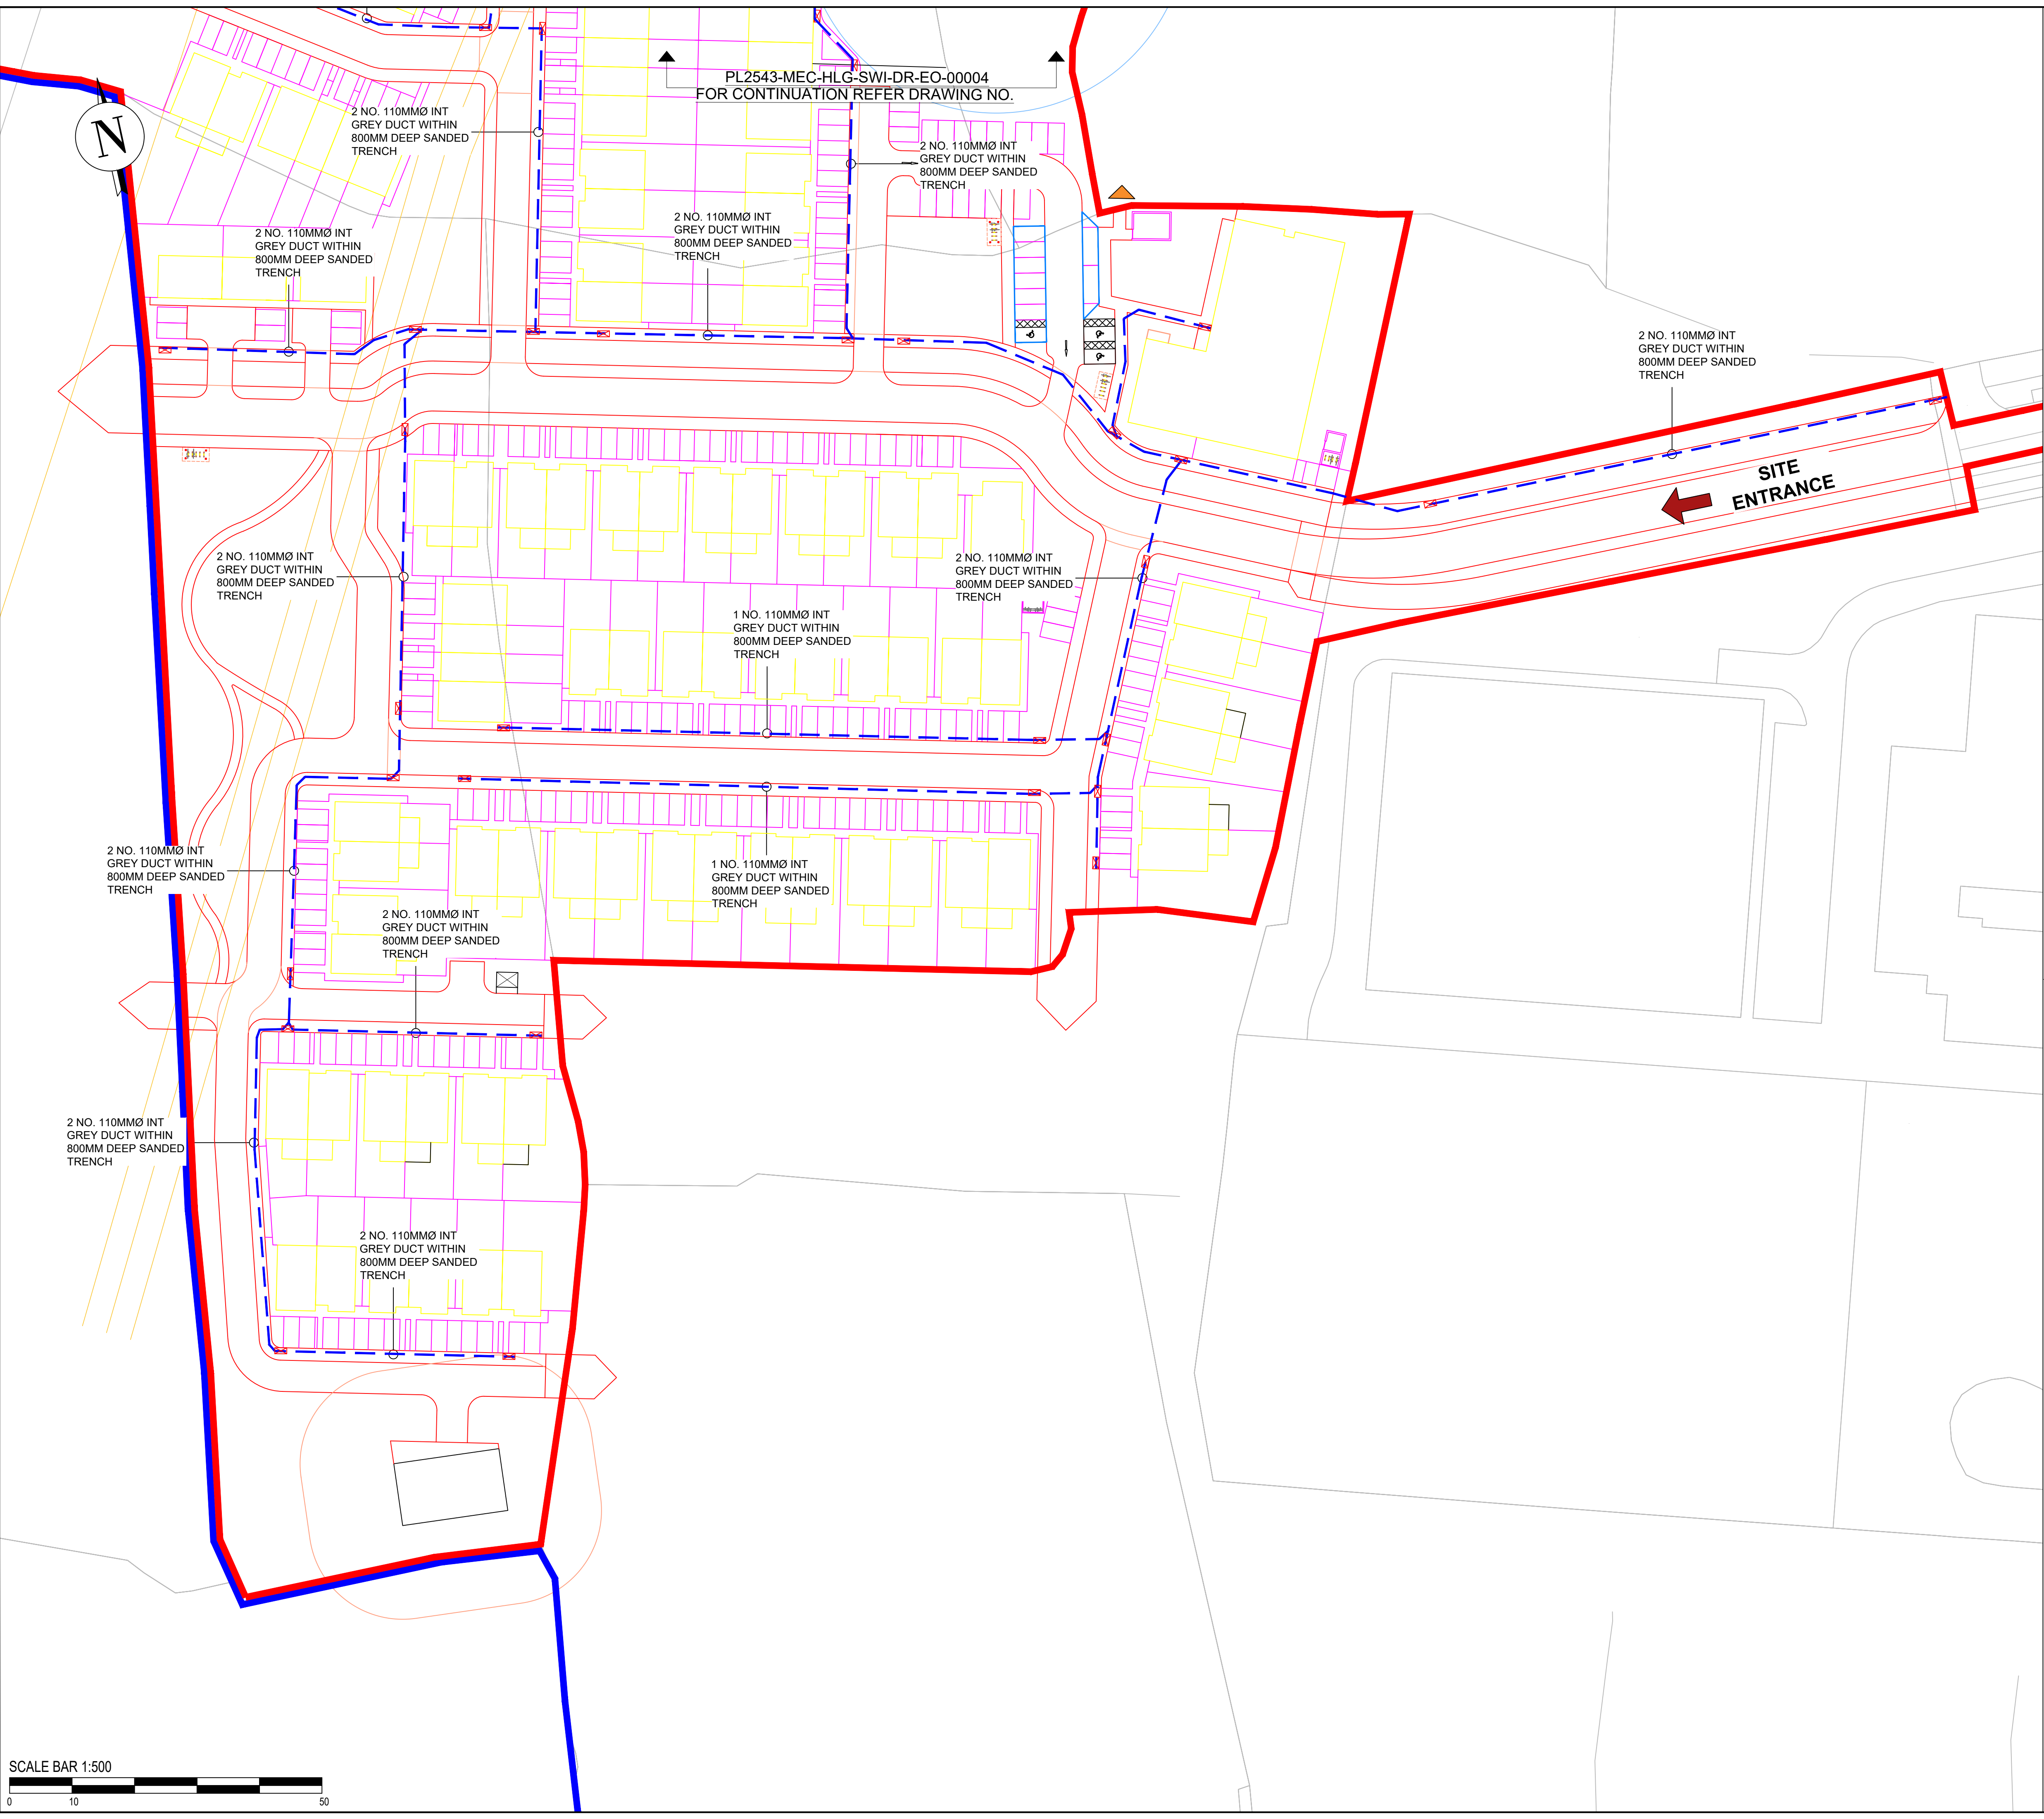

- GENERAL NOTES:
1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS & TECHNICAL SPECIFICATIONS.
 2. ALL INSTALLATIONS TO BE CARRIED OUT IN ACCORDANCE WITH CURRENT NSAI REGULATIONS AND GUIDELINES.
 3. TRENCH AND DUCT INSTALLATION IN RELATION TO THE EIRCOM SCOPE OF WORKS TO BE CARRIED OUT IN ACCORDANCE WITH EIRCOM WHITE GUIDANCE DOCUMENT CURRENT EDITION.
 4. PRIOR TO BACK FILLING AND MAKING GOOD EIRCOM TRENCH THE CONTRACTOR SHALL REQUEST EIRCOM ATTENDANCE TO SITE TO REVIEW AND APPROVE DUCTING PROVISION.
- LEGEND
- JB4  EIRCOM ACCESS CHAMBER JB4 TYPE REFER TO EIRCOMS WHITE BOOK FOR ACCESS CHAMBER DETAILS
-  100mmØ EIRCOM GREY WAVIN DUCT WITHIN DEEP SANDED TRENCH BY MAIN CONTRACTOR REFER TO DETAIL 'A'

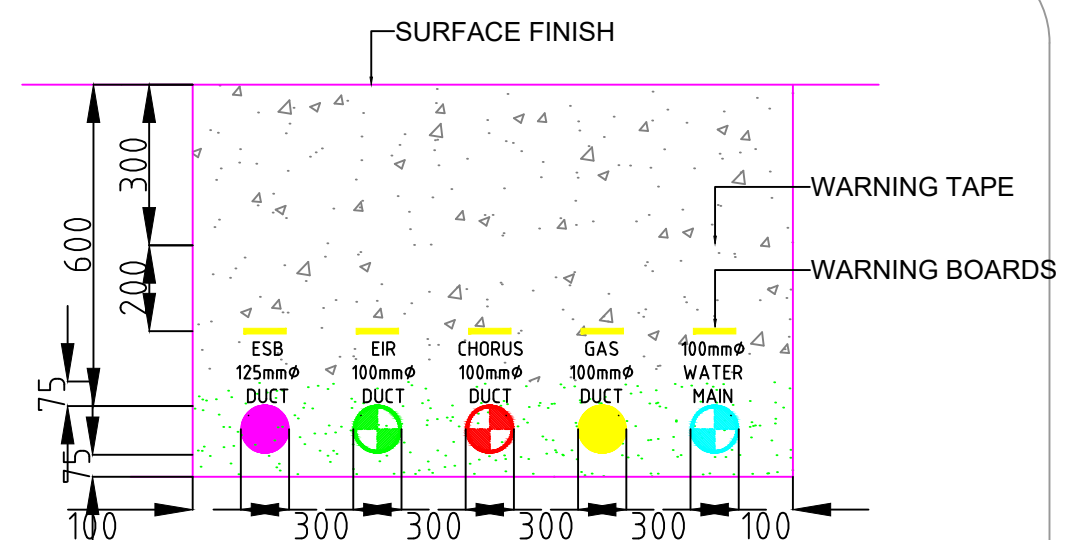

- NOTES:
- 1: FOR GAS SERVICES A MINIMUM COVER OF 375mm IS REQUIRED AT LOWEST POINT OF THE G.R.P. SLEEVE BEND. 550mm MINIMUM COVER IS REQUIRED OVER THE TAPPING TEE.
 - 2: FOR GAS SERVICES IN A CARRIAGEWAY OR ROAD A MINIMUM DEPTH OF COVER OF 750mm IS REQUIRED.
 - 3: WHERE IT IS NECESSARY TO CROSS OR RUN CLOSE TO ANY OTHER SERVICE, A MINIMUM CLEARANCE OF 250mm IS RECOMMENDED.
 - 4: ALL GAS MAIN TRENCHES ARE TO BE EXCAVATED TO THE WIDTH OF THE OUTSIDE DIAMETER OF THE GAS PIPE PLUS 300mm.
 - 5: MARKER TAPE SHOULD BE PLACED OVER ALL SERVICES.

DETAIL A: TYPICAL TRENCH DETAIL FOR MULTIPLE UTILITY

P02	SECOND ISSUE	JM	JM	JM	24/02/26
P01	FIRST ISSUE	JM	JM	JM	14/10/25
REV:	DESCRIPTION	DRWN	CHK	APD	DATE
Molloy Consulting Engineers Cahercalla Road Ennis Co.Clare. Phone: +353 65 689 1950 Mobile: +353 86 315 2764 Email: info@molloyconsulting.ie					
CLIENT					
HOMELAND PROJECTS					
PROJECT					
MUNGRET, CO. LIMERICK					
TITLE					
BROADBAND DUCTING LAYOUT 1					
SCALE@A1	DRAWN	CHECK	APPROVED	DATE	
1:500	PP	JM	JM	24/02/2026	
DRAWING NUMBER					ISSUE
PL2543-MEC-HIG-SWI-DR-EO-00003					P02
©THIS DRAWING IS THE COPYRIGHT OF MOLLOY CONSULTING ENGINEERS LTD. It shall not be used or reproduced in any way without their prior written consent.					