

Tree Protection Specification - Above ground stabilizing system

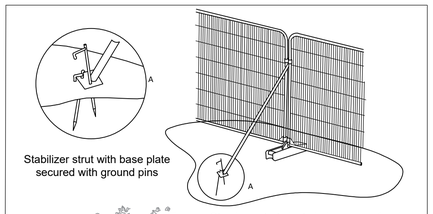


Stabilizer strut with base plate secured with ground pins

Stabilizer struts installed on every fencing panel section on the tree protection side



BS5837:2012 Figure 3

Trim lateral growth back to timber fence line.



This drawing is to be read in conjunction with the respective arboricultural schedules and reports relevant to this project.

Where contradictions between this drawing and any other design information becomes apparent, the respective authors should be contacted immediately.

It is the responsibility of the main site contractor to check and verify all information and measurements onsite and confirm prior to the commencement of works, and to ensure that all site operatives work in accordance with respective arboricultural reports and BS5837:2012, Trees in relation to design, demolition and construction.

BS5837:2012 Tree Categorisation

Category A
Trees of high quality with an estimated remaining life expectancy of at least 40 years

Category B
Trees of moderate quality with an estimated life expectancy of at least 20 years

Category C
Trees of low quality with an estimated life expectancy of at least 10 years, or young trees with a stem diameter below 150mm

Category U
Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years

Key

- Root Protection Areas — The minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the trees viability
- Tree, Shrub or Hedgerow Group
- T23 — Reference Number for Tree, Group or Hedgerow
- Site boundary
- Trees/Group to be Removed to facilitate the development shown shaded RED
- Tree group and hedgerow proposed for removal to accommodate the Dunboyne Link Road proposed by Meath County Council
- Tree Protection Zone - Protective fencing to be installed as per Specification. Designated Construction Exclusion Zone
- Existing site in GREY
- Proposed site in BLACK
- Proposed drainage layout

Review condition of U Category ash trees overhanging Site Boundary prior to construction.

0 5m 10m 15m 20m

Revision	Date	Description
A	14.08.2026	Revised site and redline boundary

Title:
Tree Removals & Protection Plan for Application Site Boundary and Dunboyne Link Road

Project:
Summerhill Road, Dunboyne

Client:
Solkerry Ventures Ltd.

Date: 17 Aug 2026	Scale: 1:500 @ A1	Status: Planning	
Drawn by: NAPB	Dwg ref: 251009-P-11-03	Rev: A	
Checked by: CMcC			

This drawing is the copyright of CM Arbor Ltd. has been produced for the client and project as stated above. The drawing may not be reproduced or amended, except by the written permission of CM Arbor Ltd. No liability will be accepted for any amendments made by other persons.

CM Arbor Ltd.
Arboricultural Consultants
T; 085 843 7015 / E; charles@cmarbor.com / W; www.cmarbor.com