
WILDLIFE AREA SIGN

Large Scale Residential Development at Blackglen Road, Sandyford, Dublin 18

sc1:25

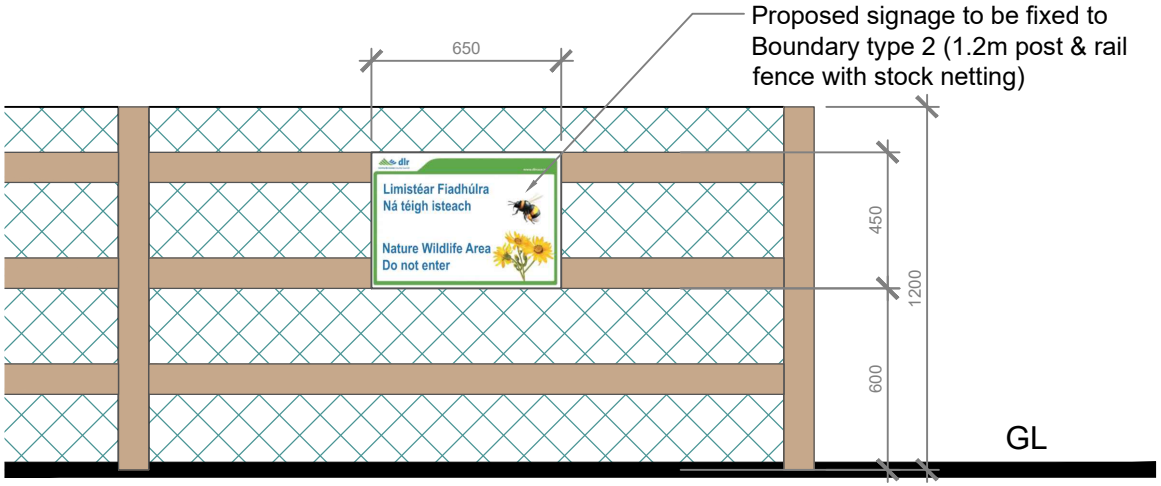

FIXING INSTRUCTION

1. Prepare the Fixing Area
   Inspect the 1.2m Post & Rail Fence with Stock Netting, ensuring it is clean and structurally sound.
2. Mark Fixing Points
   Mark the exact locations on the posts and, if necessary, the rails for attaching the signage.
3. Install Fixings
   a. Post Fixing:Use two galvanized U-bolts (minimum 10mm diameter). Pass the U-bolts around the post and through pre-drilled holes in the signage.
   Tighten securely with washers and nuts to prevent movement.
   b. Rail Support (Optional):If extra stability is required, use L-brackets to attach the bottom edge of the signage to the rail.
   c. Stock Netting Consideration:
4. Ensure fixings pass through or around the netting without distorting it. If needed, trim a small section of the netting to allow the U-bolts to fit properly, avoiding damage.
   Adjust Position and Alignment
   Ensure the signage is level and aligned using spacers or washers, if necessary.
5. Final Check
   Verify all fixings are secure and the signage is stable.

FOUNDATION

Foundations must be to engineer's specification.

g+a Landscape Architecture

+353 1 442 8187
+info@gannonandassociates.ie
+gannonandassociates.ie

+121 Baggot Street Lower,
Dublin 2,
D02FD45

REV	DATE	REVISION	DRAWN	CHECKED
J	06/12/24	Wildlife Area Sign	PS	JG

CLIENT
Zolbury Ltd

PROJECT TITLE
Large Scale Residential Development at Blackglen Road, Sandyford, Dublin 18

PROJECT ARCHITECT
OMP Architects

SHEET TITLE
Wildlife Area Sign

SHEET NO.
23170_Blackglen_PA_J_WAS

SHEET SIZE
A4

SCALE
1/25

REVISION
J

STAGE
Stage 3 – LRD Planning Application

DATE
December 2024

IRISH LANDSCAPE INSTITUTE
Institiúid Tírdreacha na hÉireann

Copyright Gannon and Associates, 2024